

SIZE	Part Num.	Threading	Headscrew
25	8655PHRA2501LF	UNC 4.40	Black
	8655PHRA2502LF	M3	Grey

NOTES:

Material: Polycarbonat (UL94V-0)
 Cable strain relief: Steel fibre reinforced Polycarbonat (UL94V-0)

Temperature range: -40°C to 120°C

Cable diameter: 4,0 to 13,0 mm

Jackscrew:
 - Headscrew : plastic, colour according threading
 - Body : Metal, threading according tables

Packaging: Bulk, in box of 100 P/N



Covers screwing force (max): 100 Ncm

Jackscrew screwing force (max): 75 Ncm

NOTE:RoHS INFORMATIONS

-The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
 -The product is not intended to be exposed to a manufacturing solder process.
 -Packaging spec: see GS-14-920.

DESIGNATION	REP	09	15	25	37
COVER BOTTOM	1			1	
JACKSCREWS	2	1		2	
STRAIN RELIEF	3		2		
COVER TOP	4		1		
SCREWS POZIDRIVE	5		2		

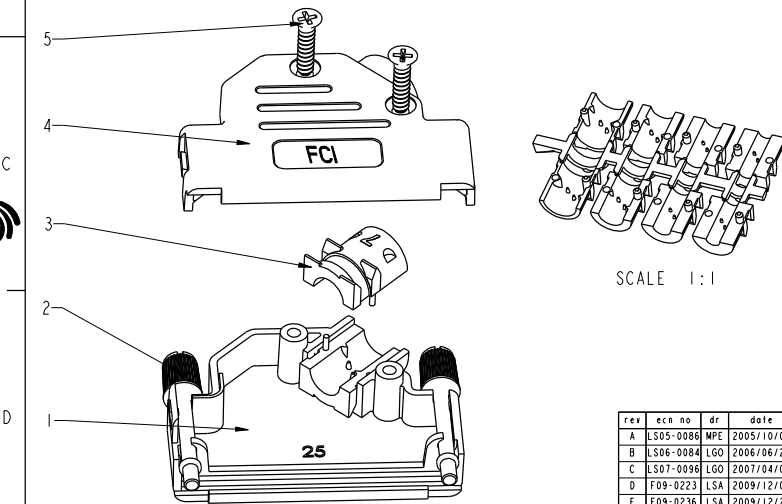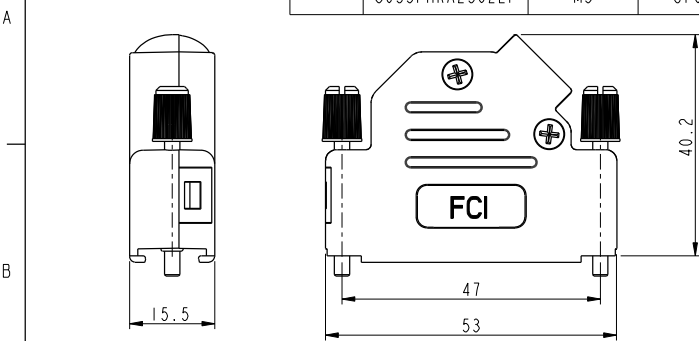


rev	ecn no	dr	date
A	LS05-0086	MPE	2005/10/05
B	LS06-0084	LGO	2006/06/20
C	LS07-0096	LGO	2007/04/04
D	F09-0223	LSA	2009/12/01
E	F09-0236	LSA	2009/12/22
F	F11-0046	APA	2011/04/05


www.fciconnect.com		surface	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	BART.S	2005/10/17	ANGULAR	0.x	±0.3
Eng	LENOIR.M	2005/10/17	LINEAR	0.xx	±0.1
Chr	LEGARE.P	2005/10/17	0° ±2°	0.xxx	±0.05
Appr	LEGARE.P	2005/10/17	Product family	D-SUB	Spec ref
FCI		D-SUB PLASTIC SHELLS		size	A3
ANGLED		10061513C		Scale	3:2
catalog no		CUSTOMER		Rev.	F
		sheet 1 of 3			

Copyright FCI.


SIZE	Part Num.	Threading	Headscrew
9	8655PHRA0901LF	UNC 4.40	Black
	8655PHRA0902LF	M3	Grey

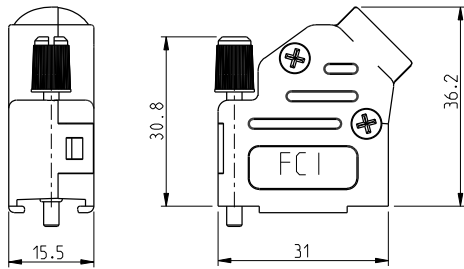

SIZE	Part Num.	Threading	Headscrew
37	8655PHRA3701LF	UNC 4.40	Black
	8655PHRA3702LF	M3	Grey

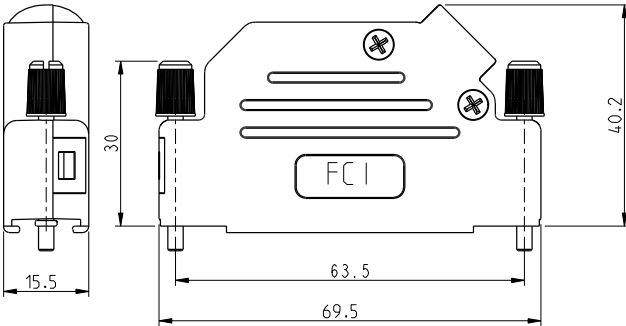

SIZE	Part Num.	Threading	Headscrew
15	8655PHRA1501LF	UNC 4.40	Black
	8655PHRA1502LF	M3	Grey

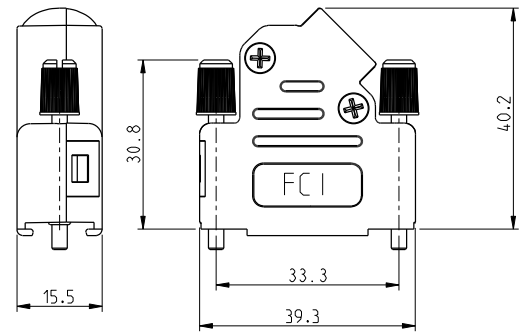


Copyright FCI.
FCI

www.fciconnect.com		surface ISO 1302	-	tolerance std ISO 406 ISO 1101	projection mm	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			size A3	Scale 3:2
Dr	BART.S	2005/10/17	ANGULAR	0.X	±0.3	
Eng	LENDIR.M	2005/10/17	LINEAR	0.XX	±0.1	
Chr	LEGARE.P	2005/10/17	0° ±2°	0.XXX	±0.05	ECN F11-0046
Appr	LEGARE.P	2005/10/17	Product family	D-SUB	Spec ref	-
FCI		Title D-SUB PLASTIC SHELLS		Eng no	10061513C	Rev. F
catalog no		-		CUSTOMER	sheet 2 of 3	


PDM: Rev:F STATUS:Released Printed: May 31, 2011

CABLING INSTRUCTIONS


1- Use two halves of strain relief different sizes can be mixed (Ø 4, 5, 7 or 9)

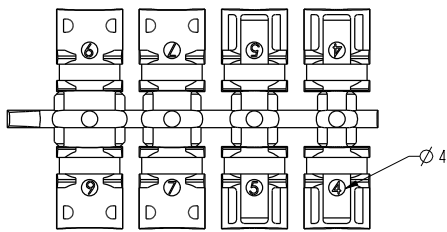


3- Mount connector and cable into the backshell

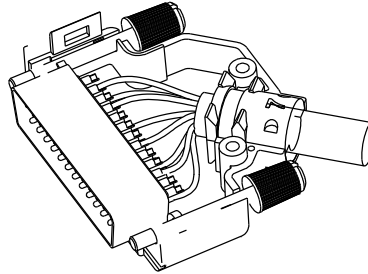

2- Attach the strain relief around the cable

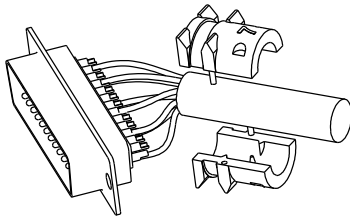

4- Assemble the other half screwing force: 100 Ncm

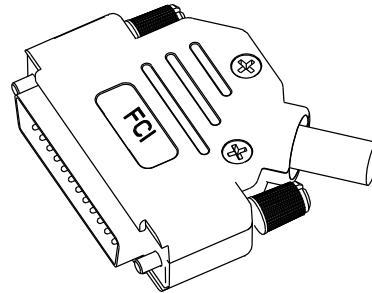

Copyright FCI.

www.fciconnect.com			surface	tolerance std	projection	mm
			ISO 1302	ISO 406 ISO 1101	mm	
			TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	BART.S	2005/10/17	ANGULAR	0.x	±0.3	size A3
Eng	LENOIR.M	2005/10/17	LINEAR	0.xx	±0.1	Scale 3:2
Chr	LEGARE.P	2005/10/17	0° ±2°	0.xxx	±0.05	ECN F11-0046
Appr	LEGARE.P	2005/10/17	Product family	D-SUB		Spec ref -
FCI			D-SUB PLASTIC SHELLS		dwg no	10061513C
			ANGLED		Rev.	F
			catalog no		CUSTOMER	sheet 3 of 3