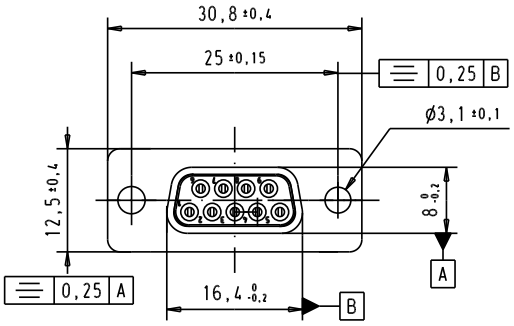

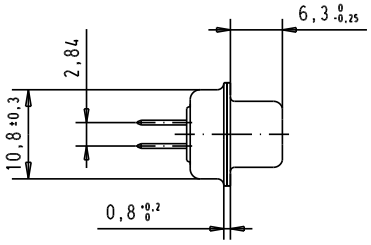

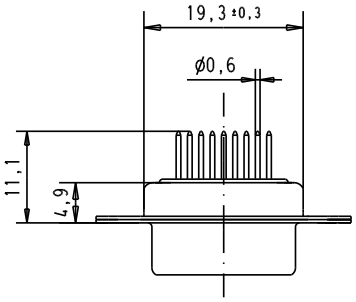

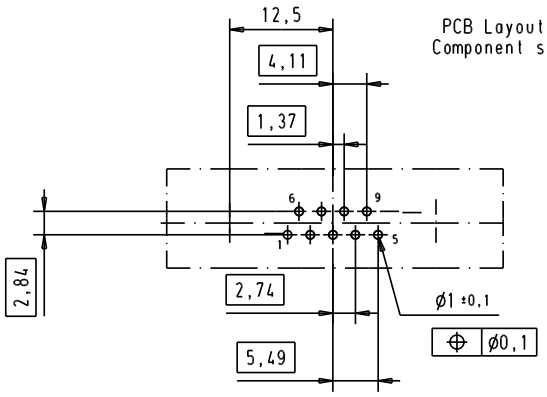

PCB Layout,
Component side

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	1000pf ±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

Mod.	Dat.	Name
33231	07/10/05	JMDR
32234	05/10/04	TR
31058	8-JUL-02	CV

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.		
Stand.		

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, female, straight, 9 Poles, solder pins, tin plated shell with holes

Ma?stab/ *Scale* 1.5:1

TB 09641127230

Sub.

Blatt/ *Page* 1/1

Downloaded from Elcodis.com electronic components distributor