

5

4

3



2

1



SPECIFICATION

Mating Cycles	200
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

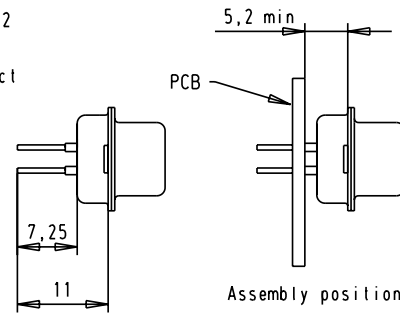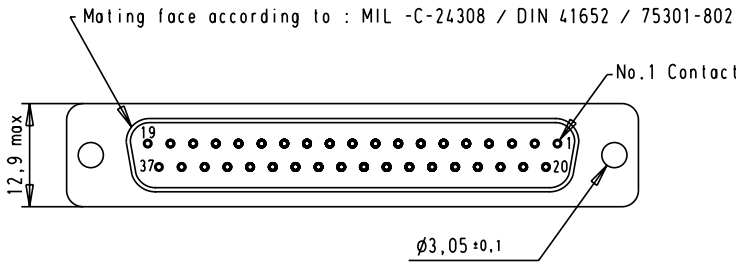

PCB Layout Component side

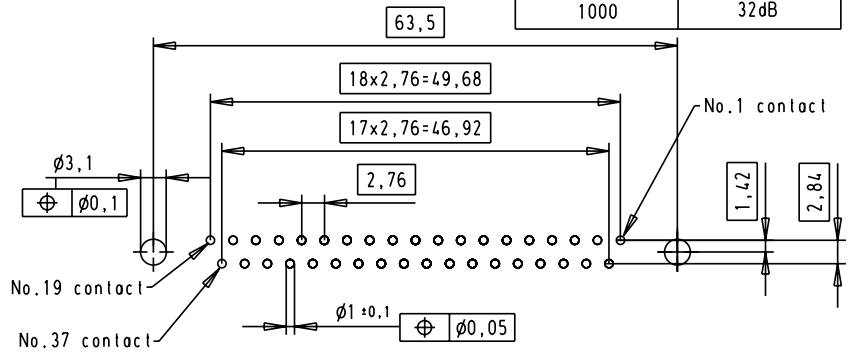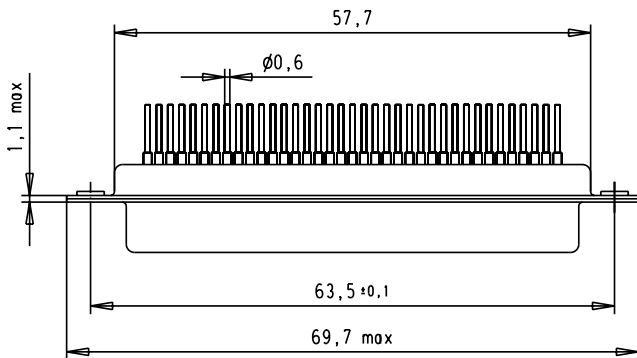

A

B

C

D

Detail.	8-JUL-02	CV	<p>All Dim. in mm Orig. Size DIN A 4</p>	D-Sub, female, straight, 37 Poles, with turned solder pin and hole	Me?/M? Lab/ Scale 1.5:1
Insp.					
Stand.					
31058	8-JUL-02	CV	HARTING EURL F-95972 Paris	TB 09644127240	Blatt/ Page 1 / 1
Mod.				Sub.	