

SERIES

NO.OF CONTACTS

09,15,25,37

TYPE OF CONTACTS

S-SOCKET

TYPE OF TERMINATION

33-ANGLED SPILL

PITCH 2.84 USA

FOOT PRINT 8.08 USA

HEIGHT OF TERMINATION

E-2.00mm COMPATIBLE FOR 1.6mm PCB

RoHS INFORMATIONS

"This LF product meets European Union Directives and other country regulations as described in GS-22-008"

The housing will withstand exposure to 260°C peak temperature for 30 seconds in a convection,infra-red or vapor reflow oven solder application.

Packaging as per GS-14-920

PRODUCT SPECIFICATION

See :- GS-12-433

PACKAGING SPECIFICATION

See :- GS-14-1157

SEE NOTE RoHS

PACKAGING SPECIFICATION

09- TRAY PACKAGING

MOUNTING OPTIONS

RV->LIF METAL PEG +F.SCREW LOCK UNC 4 40+METAL BRACKET


RL->LIF METAL PEG+ INSERT M3+METAL BRACKET

RX->LIF METAL PEG + INSERT UNC 4-40 +METAL BRACKET

PLATING

6->500 Mating/Un-mating performance
4->200 Mating/Un-mating performance

mat'l. code				surface		tolerance		projection		product family	
SEE.TECH.SPEC				ISO 1302		ISO 406 ISO 1101		MM		DELTA-D	
ltr	ecr	no	dr	date	tolerances unless otherwise specified		MM		title		
A	I07-0038		GWJ	07-03-16	angles	linear	0.00,0.1		DELTA-D A/S FEMALE PIP CONNECTOR		
B	I08-0175	AS		09-01-14	0°.1"		0.00,0.00X		US VERSION		
C	I09-0162	AS		2009-08-13			scale -		dwg no		
					dr	ANISHSALAM	2007-12-04		sheet 1 of 2		
					enrg	ANISHSALAM	2009-08-13		size		
					chr	ANISHSALAM	2009-08-13		A3		
					appd	ANISHSALAM	2009-08-13		type		
sheet index	revision	sheet	C	C							
			1	2							

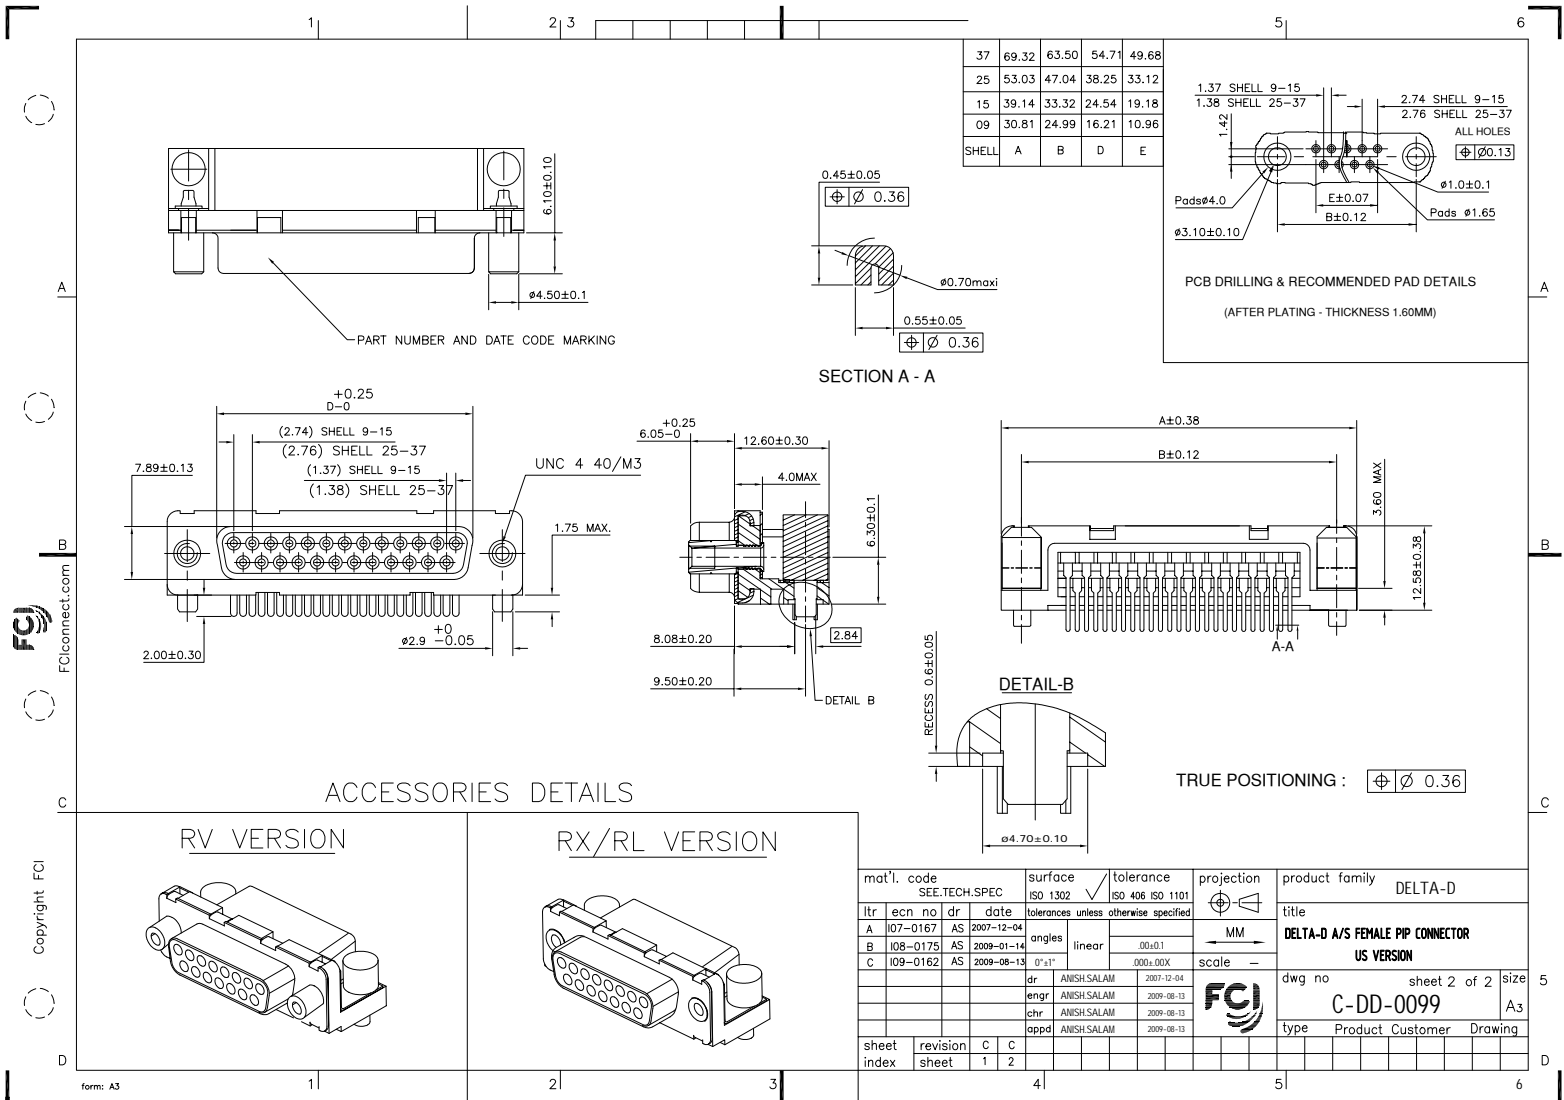

mat'l. code	surface	tolerance	projection	product family
ISO 1302	ISO 406	ISO 1101	DELTA-D	
ISO 1101	ISO 1101	ISO 1101	DELTA-D A/S FEMALE PIP CONNECTOR	
ISO 1101	ISO 1101	ISO 1101	US VERSION	
ISO 1101	ISO 1101	ISO 1101	MM	
ISO 1101	ISO 1101	ISO 1101	scale	
ISO 1101	ISO 1101	ISO 1101	FCJ	
ISO 1101	ISO 1101	ISO 1101	dwg no	sheet 2 of 2
ISO 1101	ISO 1101	ISO 1101	C-DD-0099	A3
ISO 1101	ISO 1101	ISO 1101	type	Product Customer Drawing
ISO 1101	ISO 1101	ISO 1101	sheet index	1 2