

Product Detail



| | |
|-----------------------------|--|
| Product Line: | Johnson (Click for customer service) |
| Part Number: | 105-0702-001 |
| Description: | Tip Jack and Sleeve Assembly |
| Product Family: | TIP JACK |
| Body Material: | Nylon 6/6 per ASTM D4066 |
| Breakdown Voltage: | 5700 Vrms min. |
| Color / Finish: | Red |
| Contact Material: | Beryllium copper over brass |
| Contact Finish: | Silver |
| Contact Termination: | Solder |
| Current: | 10 amps |
| Description: | Insulated With Sleeve Assembly |
| For Use With: | .080 (2.00) Tip Plug |
| Panel Thickness: | Up to .125 (3.20) |
| RoHS Compliant: | Yes |

20070523-1523

Insulated Tip Jack and Sleeve Assembly

SPECIFICATIONS

Contact: Brass per QQ-B-626D with wrap around beryllium copper spring per QQ-C-533

Finish: Silver

Body: Nylon 6/6 per ASTM D4066

Hardware: Nylon handle (assembled)

Body Thread Stripping Torque: 4.0 lb. in. (4.5 kg.cm.)

Panel Thickness: Up to .125 (3.20)




RATINGS

Current: 10 amps

Breakdown Voltage: 5700 Vrms minimum +

Contact Resistance: 0.010 ohms maximum

Contact-To-Panel C: 2 pF nominal

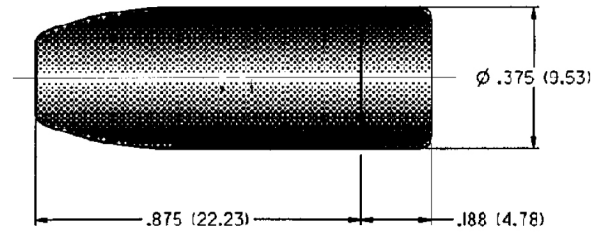

MOUNTING HOLE LAYOUT



| SILVER PLATING | |
|----------------|-------|
| PART NO. | COLOR |
| 105-0702-001 | Red |

For Standard Tip Plug: .080 (2.00) Diameter

FEATURES:

- Machined contact with turret terminal
- Includes deluxe tip jack 105-060X-001
- For panel or line applications
- Hex socket head .188 (4.77) for ease in mounting
- Nylon UL approved for self extinguishing