Product Detail



Product Line: <u>Johnson</u> (Click for customer service)

Part Number: 105-0602-001

Description: Tip Jack - Insulated Deluxe

Product Family: TIP JACK

Body Material: Nylon 6/6 per ASTM D4066

Breakdown Voltage:

5700 Vrms min.

Color / Finish: Red

Contact Material: Beryllium copper over brass

Contact Finish: Silver

Contact

Termination:

Solder

Current: 10 amps

Description:Insulated DeluxeFor Use With:.080 (2.00) Tip PlugPanel Thickness:Up to .437 (11.10)

RoHS Compliant: Yes

20070523-1523

Tip Jack **Insulated Deluxe**

INCHES (MILLIMETERS)

.750 (19.04)

.562 (14.27)

CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

-.188 (4.78)

Ø .375 (9.53)

SPECIFICATIONS

Contact: Brass per QQ-B-626D with wrap around beryllium copper spring per QQ-C-533

Finish: Silver

Body: Nylon 6/6 per ASTM D4066

Hardware: Nickel plated nut (unassembled)

Body Thread Stripping Torque: 0.4 lb. in (4.5 kg. cm.)


Panel Thickness: Up to .437 (11.10)

RATINGS

Current: 10 amps

Breakdown Voltage: 5700 Vrms minimum + Contact Resistance: 0.010 ohms maximum

Contact-To-Panel C: 2 pF nominal

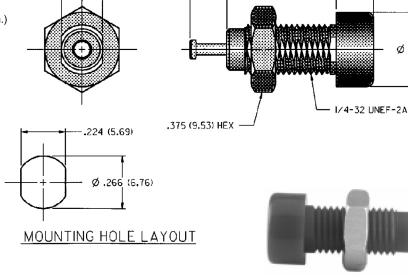

.209 (5.3)

SILVER PLATING	
PART NO.	COLOR
105-0601-001	White

For Standard Tip Plug: .080 (2.00) Diameter **FEATURES:**

- · Machined contact with turret terminal
- Hex socket head .188 (4.77) for ease in mounting
- · Closed entry blocks access of probes greater than .085 (2.16)
- · Nylon UL approved for self extinguishing