LOC	DIST
GP	00

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REVISED PER ECO-11-005027	10MAY2011	RK	HMR

1. MATERIAL: COPPER ALLOY.
2. FINISH: TIN PLATING PER ASTM B 545, 1.25µm MINIMUM THICKNESS ALL OVER NICKEL FLASH PER QQ-N-290. NONPLATED EDGES PERMISSIBLE.
3. PADS AND VIAS CHASSIS GROUND.
4. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. REFERENCE APPLICATION SPEC 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESSES.
6. COMPANY LOGO IN APPROXIMATE AREA SHOWN

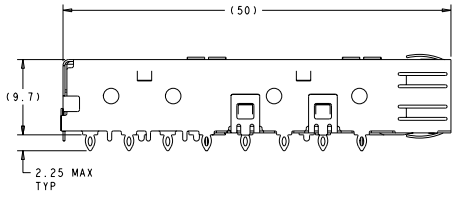





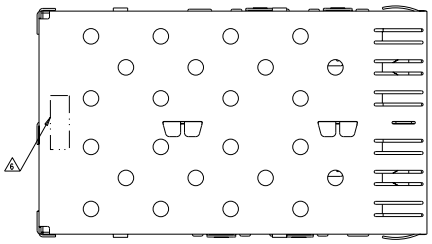

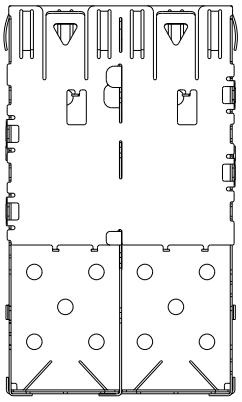



1761014-1
1X2 CAGE ASSEMBLY
SCALE 4:1



1 x 2 CAGE	1761014-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±1°
1 PLC ±°
2 PLC ±0.10
3 PLC ±°
4 PLC ±°
ANGLES ±2°

MATERIAL: 1
FINISH: 2

DRN: R VAN SCYOC 3MAR2004
CHK: MJ PHILLIPS 3MAR2004
APVD: MJ PHILLIPS 3MAR2004
PRODUCT SPEC: 108-1950
APPLICATION SPEC: 114-13120
WEIGHT: -
CUSTOMER DRAWING

TE Connectivity

NAME: ASSEMBLY, CAGE, 1X2 PRESS FIT, SFP

SIZE: A1 | CAGE CODE: 00779 | DRAWING NO: C-1761014 | REVISION: D1

RESTRICTED TO: -

SCALE: 4:1 | SHEET 1 OF 2

4005 13JUL11

Pro/ENGINEER DRAWING

Downloaded from Elcodis.com electronic components distributor

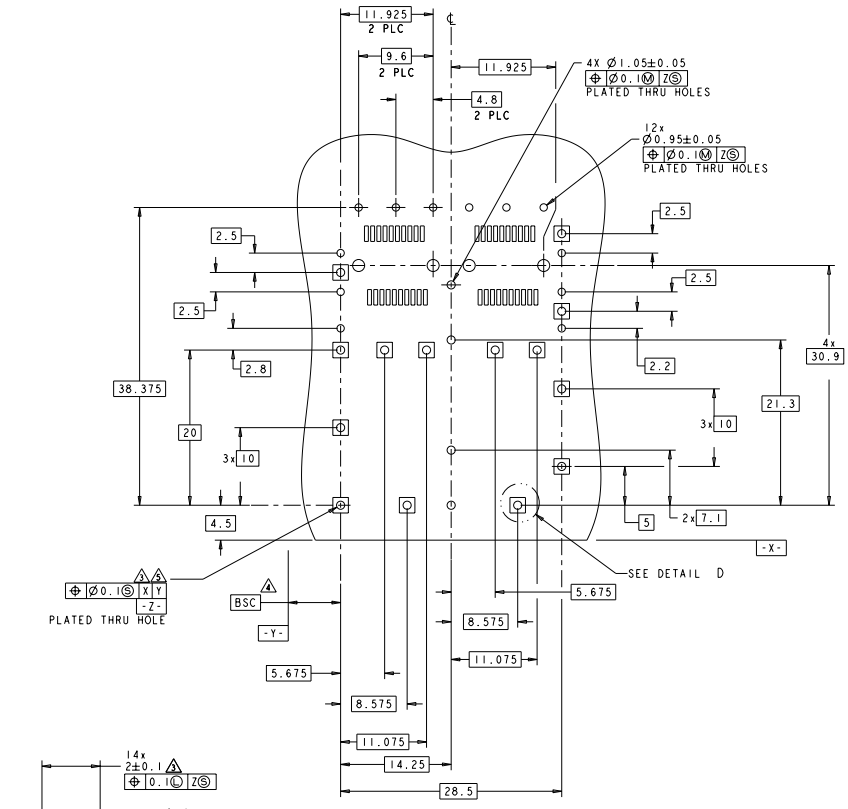



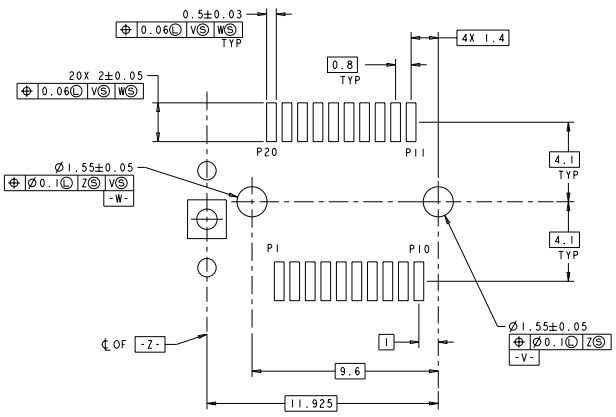

REVISIONS

LOC	DIST
GP	00

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 Y ALL RIGHTS RESERVED.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±1°
1 PLC ±0°
2 PLC ±0.10
3 PLC ±0°
4 PLC ±0°
ANGLES ±0°

MATERIAL :
FINISH :

DRN R VAN SCYOC 13MAR2004
CHK MJ PHILLIPS 13MAR2004
APVD MJ PHILLIPS 13MAR2004
PRODUCT SPEC 108-1950
APPLICATION SPEC 114-13120
WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME ASSEMBLY, CAGE, 1X2 PRESS FIT, SFP

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-1761014 | RESTRICTED TO -

SCALE 4:1 | SHEET 2 OF 2 | REV D1

4805 12/1111

Downloaded from Elcodis.com electronic components distributor