


I/O Connectors Datasheet

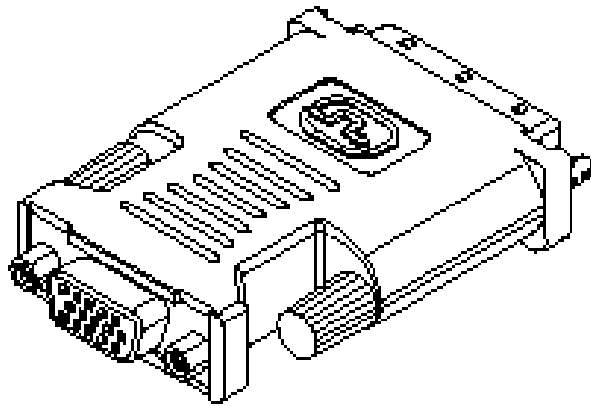

Series image - Reference only

EU RoHS

China RoHS

ELV and RoHS Compliant

Search Parts in this Series

88744 Series

Mates With

74320 receptacles

Part Number: **0887418700**



Status: **Active**

Description: MicroCross™ DVI Digital Visual Interface, Shielded I/O Adapter, DVI-Analog Plug to VGA Receptacle

Documents:

- [Drawing \(PDF\)](#)
- [Related Catalog Page \(PDF\)](#)

Order Products:

-  [Check Distributor Inventory](#)
-  [Request Samples](#)

Part Detail: [\(show all\)](#)

- General**
- Physical**
- Electrical**
- Material Info**
- Reference - Drawing Numbers**

General

Product Family	I/O Connectors
Series	88744
Application	Wire-to-Board
Comments	DVI-Analog Plug to VGA Receptacle
Component Type	Adapter
Obsolete Date	2003-01-01
Product Name	MicroCross™DVI
Type	N/A

Physical


Circuits (Loaded)	29
Circuits (maximum)	29
Color - Resin	Black
Durability (mating cycles) min	100 cycles
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Plating Termination	Tin-Lead
Material - Resin	Polyester
Orientation	Vertical
PCB Retention	Yes
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.075 In
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	1.90 mm
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (uin)	10
Plating min: Mating (uin)	2
Plating min: Mating (um)	0.05
Plating min: Mating (um)	0.25
Plating min: Termination (uin)	150
Plating min: Termination (um)	3.75
Polarized to Mating Part	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-20°C to +85°C
Termination Interface: Style	Solder or Weld
Wire Size AWG	N/A

Electrical

Current - Maximum	3.000 Amp
Shielded	Yes
Voltage - Maximum	40V

Material Info**Reference - Drawing Numbers**

Sales Drawing	SD-88741-008
---------------	--------------

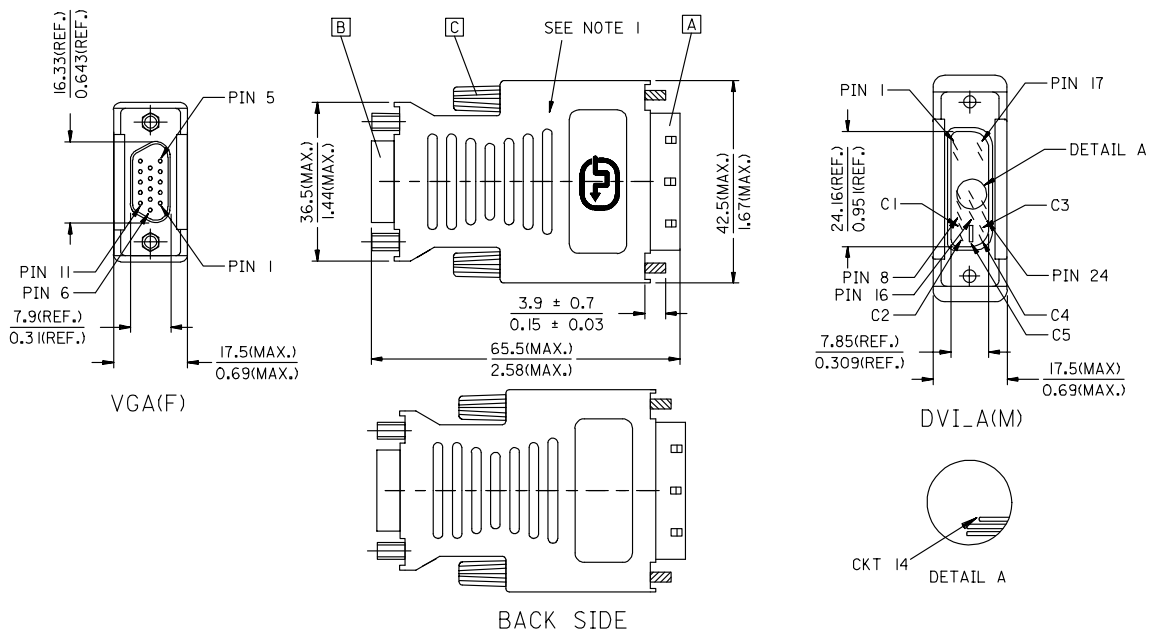

ENTER DESCRIPTION EC NO: DG2006-0186 DRW: PDAI CHKD: CHYKD APPR: KAN	2006/03/09 2006/03/09 2006/03/10	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±---</td> <td>±---</td> </tr> <tr> <td colspan="3">ANGULAR ±---°</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±---	±---	1 PLACE	±---	±---	ANGULAR ±---°			DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
					mm	INCH																				
			4 PLACES		±---	±---																				
			3 PLACES		±---	±---																				
2 PLACES	±---	±---																								
1 PLACE	±---	±---																								
ANGULAR ±---°																										
				MM/IN	---	METRIC																				
				DRAWN BY	DATE	TITLE																				
				PDAI	2006/03/07	DVI_A(M)-VGA(F) ADAPTER																				
				CHECKED BY	DATE																					
				ZXDENG	2006/03/07																					
				APPROVED BY	DATE																					
				BORON	2006/03/07																					
				MATERIAL NO.	DOCUMENT NO.																					
				88741-8700	SD-88741-008																					
				SIZE	SHEET NO.																					
				A4	1 OF 2																					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																						

ib_frame_A4_P_ME_T
Rev. D 2004/04/02

6

5

4

3

2

1

7 6 5 4 3 2 1

- NOTE: 1. MOLD WITH SNOW WHITE PVC RESIN 887800077 FOR ADAPTOR COVER.
 2. DVI CONNNECTOR SPECIFICATION
 2.1 REFER TO PRODUCT SPEC. PS74320-0001.
 2.2 CONTACT PLATING: AU FLASH.
 3. ELECTRICAL PERFORMANCE
 3.1 INSULATION RESISANCE: 20 M Ohms Min
 3.2 DIELECTRIC STRENGTH: 300V DC FOR 10 MILLISECONDS.
 3.3 IMPEDANCE: 75 ± 10% Ohms ON THE CO-AXIAL WIRES.
 4. ADAPTOR SPECIFICATION
 4.1 REFER TO PRODUCT SPEC. PS88741-8700.
 5. THIS PRODUCT MUST MEET MX RoHS COMPLIANCE.

6. CONNECTION DIAGRAM

SHIELD	SHIELD	GROUND
PIN R6,G7,B8	C 5	ANLOG GROUND
PIN 13	C 4	HORIZONTAL SYNC
PIN 3	C 3	ANLOG
PIN 2	C 2	ANLOG
PIN 1	C 1	ANLOG
PIN 5,10	PIN 15	GROUND(+5V & HV SYNC)
PIN 9	PIN 14,16	POWER +5V/HOT PLUG DETECT
PIN 14	PIN 8	VERTICAL SYNC
PIN 12	PIN 7	DDC DATA
PIN 15	PIN 6	DDC CLOCK
VGA	DVI_A	CABLE FUNCTION

7. MATERIAL LIST

C	SCREW (WHITE) 887806002
B	FEMALE 15C D-SUB CONNECTOR 887899318
A	DVI_A G/F CONNECTOR 743230011
ITEM	DESCRIPTION

ENTER DESCRIPTION EC NO: DG2006-0186 DRW: PDAI CHKD: APPR: KAN 2006/03/09 2006/03/09 2006/03/10	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
				MM/IN	---	METRIC	MOLEX INCORPORATED DVI_A(M)-VGA(F) ADAPTER
		4 PLACES	±---	±---	DRAWN BY	DATE	
		3 PLACES	±---	±---	CHECKED BY	DATE	
2 PLACES	±---	±---	ZXDENG	2006/03/07			
1 PLACE	±---	±---	APPROVED BY	DATE			
		ANGULAR ±---°	BORON	2006/03/07			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
		88741-8700		SD-88741-008		2 OF 2	
		SIZE A4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

ib_frame_A4_P_ME_T
Rev. D 2004/04/02

6

5

4

3

2

1