


FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown herein may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the written consent of FCI. Copyright FCI.

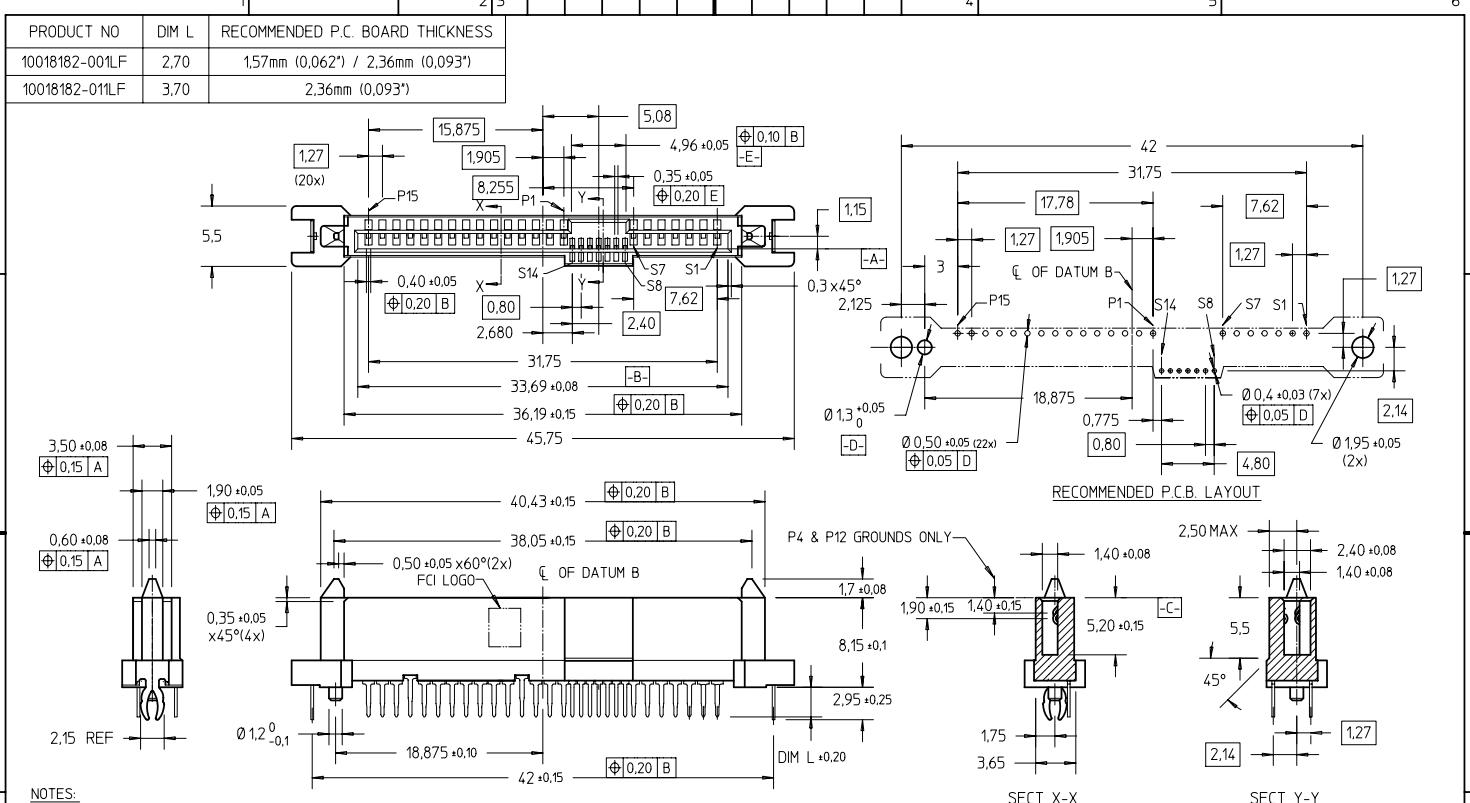

- NOTES:**
- MATERIAL:**
 - HOUSING : HIGH TEMP TERMOPLASTIC, UL 94V-0
COLOR : BLACK
 - TERMINAL : COPPER ALLOY
 - HOLD DOWN : COPPER ALLOY
 - FINISH :**
 - TERMINAL : 30u" Au PLATING (CONTACT POINT)
OVER 50u" NICKEL
 - SOLDER TAIL : 50u" min Sn OVER 50u" NICKEL
 - HOLD DOWN : 50u" min Sn OVER 50u" NICKEL
 - PER SFF REV 11, EXCEPT 0.8mm PITCH BUMP AREA.
 - THE STD PACKAGING IS IN TRAY.
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 157mm MINIMUM THICK CIRCUIT BOARD.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - PART NUMBERS ENDING IN "LF" MEANS FOR NOTE 6 LEAD FREE IDENTIFICATION. P/N XXXXXXXX-XXLF IS EQUIVALENT TO PREVIOUS P/N XXXXXXXX-XXX.

mat'l. code		surface	tolerance	projection	product family
		ISO 1302	ISO 406 ISO 1101		SAS
itr	ecn no	dr	date	tolerances unless otherwise specified	
A	S04-0026	GLL	2004-02-27	angles	mm
B	S04-0201	GLL	2004-09-27	linear	= +0.20
C	S05-0026	GLL	2005-02-14	± 2°	scale 2 : 1
D	S06-0281	GLL	2006-08-28	dr	GL L00 2004-02-27
				enrg	GL L00 2004-02-27
				chr	GL L00 2006-08-28
				appd	JOEY NS 2006-08-28
sheet	revision	D			
index	sheet	1			