


THE DRAWING IS UNPUBLISHED.  
 RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REV	DATE	BY	APPD
D2	REVISED PER ECO-11-005033	23MAR11	RK HMR

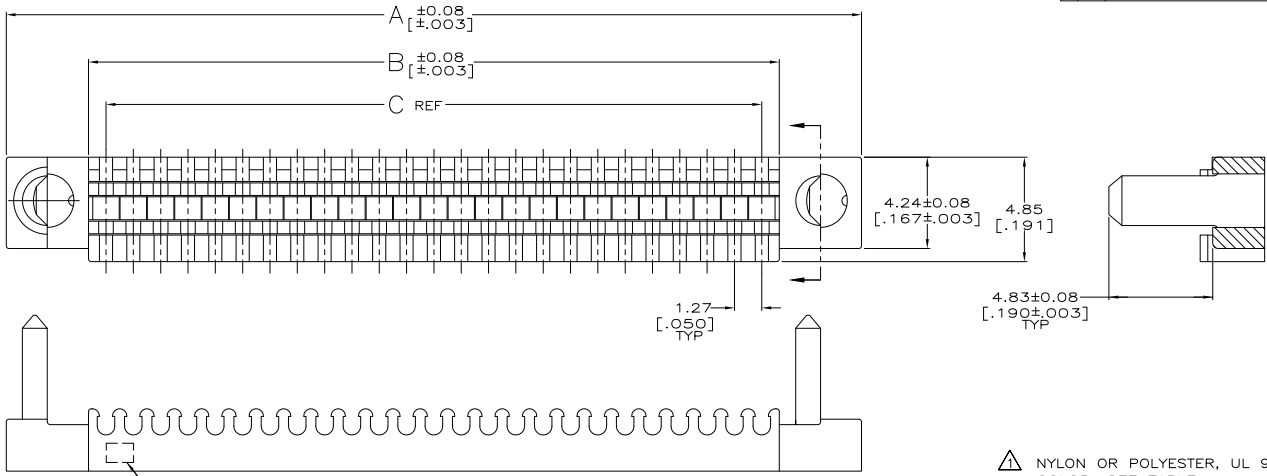

- ▲ NYLON OR POLYESTER, UL 94V-0 RATED, COLOR: SEE TABLE.
- ▲ RECOMMENDED WIRE: 28 AWG OR 30 AWG SOLID OR 7 STRAND. SEE TABLE FOR INSULATION DIA. WIRE MUST BE APPROVED BY AMP INC.
- 3. TWO COVERS REQUIRED PER CONNECTOR ASSEMBLY.
- ▲ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	0.74-0.79	[.029-.031]	GRAY	2	62.23	[2.450]	63.86	[2.514]	71.50	[2.815]	100	1-750877-9	
	0.74-0.79	[.029-.031]	GRAY	2	41.91	[1.650]	43.54	[1.714]	51.18	[2.015]	68	1-750877-7	
	0.74-0.79	[.029-.031]	GRAY	2	30.48	[1.200]	32.11	[1.264]	39.75	[1.565]	50	1-750877-5	
▲ OBSOLETE	0.74-0.79	[.029-.031]	GRAY	2	24.13	[.950]	25.76	[1.014]	33.40	[1.315]	40	1-750877-4	
	0.74-0.79	[.029-.031]	GRAY	2	15.24	[.600]	16.87	[.664]	24.51	[.965]	26	1-750877-2	
▲ OBSOLETE	0.81-0.91	[.032-.036]	BLACK	1	62.23	[2.450]	63.86	[2.514]	71.50	[2.815]	100	750877-9	
	0.81-0.91	[.032-.036]	BLACK	1	49.53	[1.950]	51.156	[2.014]	58.801	[2.315]	80	750877-8	
	0.81-0.91	[.032-.036]	BLACK	1	41.91	[1.650]	43.54	[1.714]	51.18	[2.015]	68	750877-7	
	0.81-0.91	[.032-.036]	BLACK	1	30.48	[1.200]	32.11	[1.264]	39.75	[1.565]	50	750877-5	
▲ OBSOLETE	0.81-0.91	[.032-.036]	BLACK	1	24.13	[.950]	25.76	[1.014]	33.40	[1.315]	40	750877-4	
	0.81-0.91	[.032-.036]	BLACK	1	15.24	[.600]	16.87	[.664]	24.51	[.965]	26	750877-2	
	WIRE OUTER DIA		▲	COLOR	PART ID	NO	C		B		A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

APPROVED BY: R. MCMASTER (14JUN04), S. SHUEY (14JUN04), M. WALMSLEY (14JUN04)

TE Connectivity

COVER, TERMINATING, DISCRETE WIRE, AMPLITE

SIZE: A2, CAGE CODE: 00779, DRAWING NO: 750877, RESTRICTED TO: D2