


DWG. NO. SD-51239-005

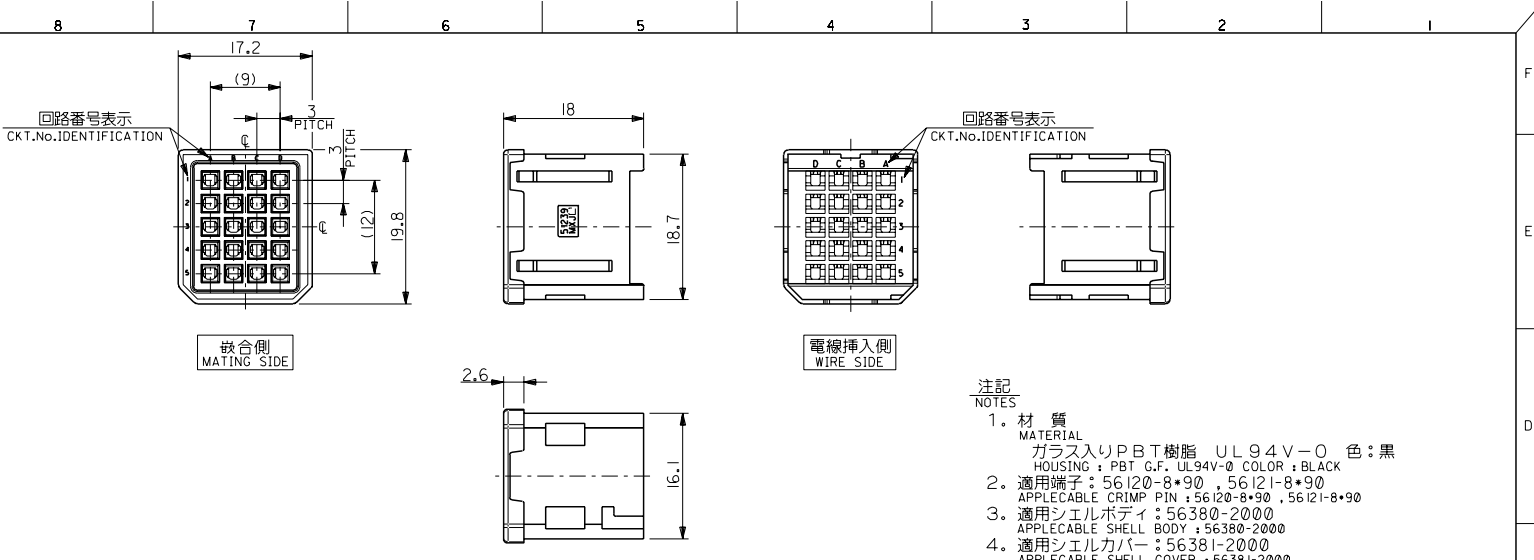

- 注記 NOTES
1. 材質 MATERIAL  
ガラス入りPBT樹脂 UL94V-0 色:黒  
HOUSING: PBT G.F. UL94V-0 COLOR: BLACK
  2. 適用端子: 56120-8\*90, 56121-8\*90  
APPLICABLE CRIMP PIN: 56120-8\*90, 56121-8\*90
  3. 適用シェルボディ: 56380-2000  
APPLICABLE SHELL BODY: 56380-2000
  4. 適用シェルカバー: 56381-2000  
APPLICABLE SHELL COVER: 56381-2000
  5. 嵌合相手: 51233-201\*  
MEET WITH: 51233-201\*

<誤嵌合防止キー(極性)タイプ> <POLARITY KEY TYPE>

51234-2001	51234-2002	51234-2003	51239-2004	51239-2005
STANDARD TYPE	A TYPE	B TYPE	C TYPE	D TYPE

C-4	D	51239-2005	51239-***0*	20
C-3	C	51239-2004		
B-3	B	51239-2003		
B-2	A	51239-2002		
—#—	STANDARD	51239-2001		
POLARITY POSITION (CIRCUIT No.)	POLARITY TYPE	MATERIAL No.	MODEL No.	CIRCUIT

DO NOT SCALE DRAWING	EC NO. DRWN: CHFK: APPR:	EC NO. DRWN: CHFK: APPR:	EC NO. DRWN: CHFK: APPR:	REVISED: 01/10/04	REV: 0	MATERIAL 材料 注記参照 SEE NOTES	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	THIRD ANGLE PROJECTION <input checked="" type="checkbox"/>	SHT REV REVISE ON CAD ONLY
				EC no. J2002-0786 DRWN: S.AKIYAMA CHFK: J.MIYAZAWA APPR: Y.O.ITO							
			A	RELEASED: 01/02/05		WIRE RANGE 適用電線範囲	10 OVER 以上 30 UNDER 未満 +0.25				MOLEX INCORPORATED
						INS. RANGE 被覆外径	30 OVER 以上 +0.3				
							ANGLE 角度 +3°				DRAWING NO. SD-51239-005
											SHEET NO. 1 OF 1
											SIZE B
											EN-02J(097) MXJ-54