
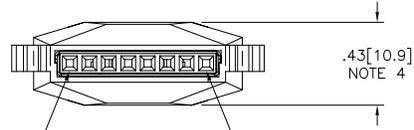



PRODUCT NUMBER  
SEE SHT. 2

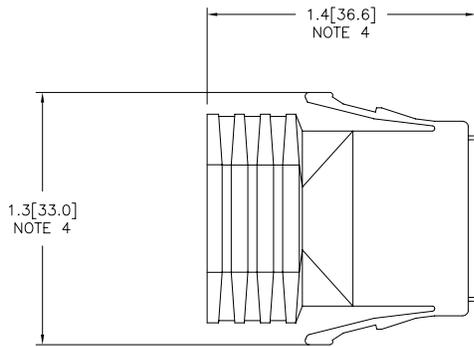

POSTION #1

POSTION #8

mat'l. code		surface	tolerance	projection	product family			
		ISO 1302	ISO 406		LATCH-N-LOK			
			ISO 1101		title			
ltr	ecn no	dr	date	angles	linear	tolerance	INCH/MM	1x8 LATCH-N-LOK 360° SHIELDED
D	v91916	TGD	10/7/99			.XX±.01/.3		PLUG CONN. KIT W/O PV'S
E	v92065	RGD	10/29/99			.XXX±.005/.13		dwg no
F	v01017	TFG	5/15/00	0°±2"		.XXXX±.0020/.051	scale 1:1	74903
G	v01050	TFG	6/5/00	dr	M. HERNANDEZ	12/03/04	sheet 1 of 3	A3
H	v01093	TFG	7/6/00	engr	M. BARRIOS	12/03/04	type	Product Customer Drawing
J	M04-0229	MHT	12/03/04	chr	M. BARRIOS	12/03/04		
K	M06-0365	AGS	9/20/06	appd	M. BARRIOS	12/03/04		
sheet	revision	K	K	K				
index	sheet	1	2	3				

74903-TUVLF





U	COLOR	
01	LT-GRAY	OBS
02	OFF WHITE	
03	DK- GRAY	OBS
04	BLACK	
05	SLATE-GRAY	OBS
07	SILVER GRAY	
08	PEARL-WHITE	OBS
09	PEBBLE GRAY	

T	HOLE DIA.
7	.265/6.73
9	.312/7.92

**EXAMPLE**

74903-707LF: IS A 1x8 REAR EXIT PLUG  
IN SILVER GRAY WITH A CABLE EXIT  
HOLE SIZE OF .265 [6.73] CABLE RANGE ,

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 1302	ISO 406		LATCH-N-LOK
ISO 1101		ISO 1101	ISO 1101		
ltr	ecn no	dr	date	title	
K				1x8 LATCH-N-LOK 360° SHIELDED PLUG CONN. KIT W/O PV'S	
tolerances unless otherwise specified		angles	linear	INCH/MM	
0°±2°			.XX±.01/.3	scale 1:1	
			.XXX±.005/.13		dwg no
		dr	.XXXX±.0020/.051		sheet 2 of 3
		enrg			74903
		chr			A3
		appd		type	Product Customer Drawing
sheet	revision				
index	sheet				

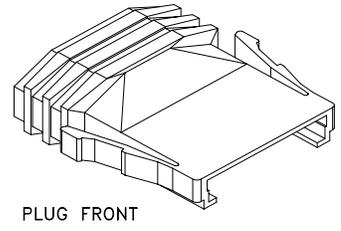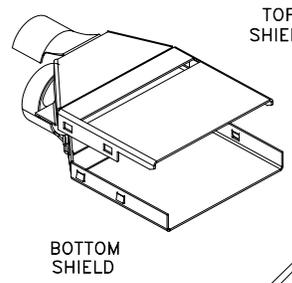

NOTES:

- ① EACH KIT CONTAINS ONE EACH OF THE FOLLOWING COMPONENTS  
LATCH-N-LOK PLUG  
LATCH-N-LOK END CAP  
MINI LATCH HOUSING  
360° SHIELD CANS.
- 2. COMPONENTS ARE BULK PACKAGED WITH 100 pcs. OF A COMPONENT PER BAG. PVC'S MUST BE ORDERED SEPARATELY.
- 3. MATERIALS USED: PLUGS AND CAPS ARE MOLDED IN POLYCARBONATE. THE MINI LATCH HOUSING ARE MOLDED IN NYLON. COLOR IS BLACK. THE SHIELD CAN IS 3/4 HARD BRASS PLATED WITH 2.5um MIN. BRIGHT TIN. 1.0um MIN. NICKEL UNDERPLATE.
- ④ DIMENSIONS ARE APPROXIMATE AND REFLECT PLUG IN UNLATCHED STATE.
- 5. PART NUMBERS WITH LF IN THE END ARE LEAD FREE.
- 6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

mat'l. code		surface	tolerance	projection	product family	
		ISO 1302	ISO 406		LATCH-N-LOK	
			ISO 1101		title	
ltr	ecn	no	dr	date	1X8 LATCH-N-LOK 360° SHIELDED PLUG CONN. KIT W/O PV'S	
K					scale 1:1	
		tolerances unless otherwise specified			sheet 3 of 3 size	
		angles	.XX±.01/.3		74903	A3
		linear	.XXX±.005/.13		type Product Customer Drawing	
		0°±2"	.XXXX±.0020/.051			
		dr	M. HERNANDEZ 12/03/04			
		engr	M. BARRIOS 12/03/04			
		chr	M. BARRIOS 12/03/04			
		appd	M. BARRIOS 12/03/04			
sheet	revision					
index	sheet					