


Tous droits strictement réservés. Toute réimpression, reproduction ou communication sans autorisation écrite du propriétaire, est formellement interdite. Property of BERG ELECTRONICS. All rights strictly reserved. Reproduction or communication without written authority from the proprietor. Copyright BERG ELECTRONICS by

All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor. Property of BERG ELECTRONICS. All rights strictly reserved. Reproduction or issue without written authority from the proprietor. Copyright BERG ELECTRONICS by


PRODUCT NO.
61572-100CA/100CALF

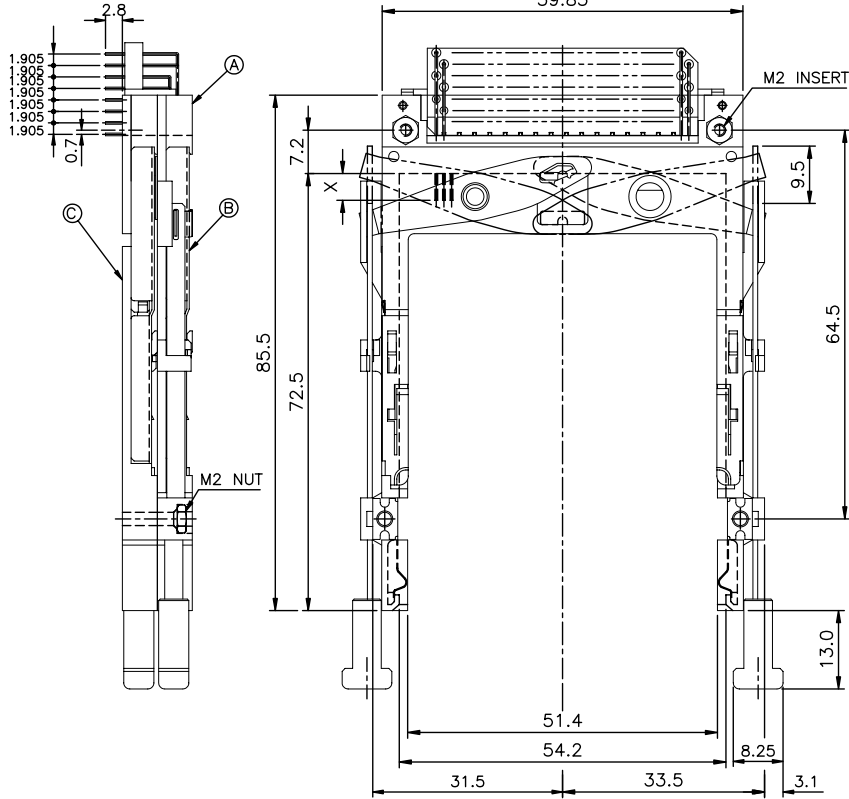


NOTES:

- EJECT FORCE : 3.5 Kg MAX.
- EJECT TRAVEL: 8.0mm
- MATERIAL
- PART A (HEADER ASS'Y)
PLASTIC : HOUSING ...LCP UL94V-0 BLACK
LOCATOR ...G.F. 6/6 NYLON UL94-VO BLACK
PIN : PHOSPHOR BRONZE
- PART B AND C (EJECT MECHANISM ASS'Y)
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-0 BLACK
PUSH ROD: POLYPHTHARAMID UL94V-0 BLACK
PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
- FINISH (PIN)
UNDER PLATING : 0.5µm MIN. Ni
CONTACT AREA : 0.1µm MIN. GOLD OVER 0.5µm MIN. Pd-Ni
SOLDER TAIL (TIN LEAD OPTION): 2.5µm MIN. Sn-Pb
SOLDER TAIL (LEAD FREE OPTION): 2.5µm MIN. PURE TIN

DIM "X"	4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68	

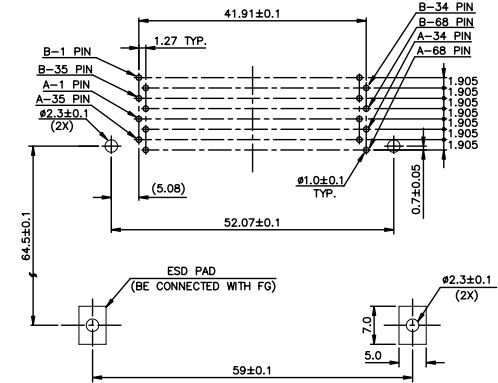

4 CARD INSERTION DIRECTION

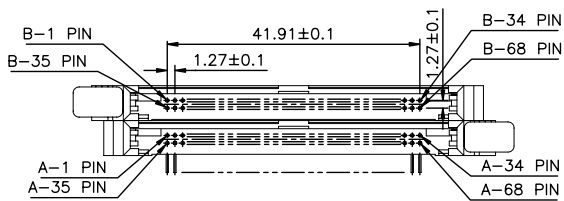

USE THE FOLLOWING P/N FOR OFFICIAL ORDERING

C	EJECT MECH ASS'Y	61571-00CA
B	EJECT MECH ASS'Y	95627-10CA
A	HDR ASS'Y	92821-000/000LF
D	DESCRIPTION	P/N


mat'l code		tolerance unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
rev.	ecn no.	dr	date	linear	projection	title	code
A	T60411	L S	08/30/96	±0.30	1	NARROW BODY FRONT EJECT	TWN
B	T70019	W L	01/07/97		2	TYPE 1/2/3 EJECTOR ASS'Y	sheet
C	T90279	W L	07/23/99	angles ± 2°	3		1 of 3
D	N05-0059	W B	03/03/08		4		
				dr	SHIRLEY HSU	08/30/96	unit
				enrg	JOSEPH HSIA	08/30/96	mm/inch
				chr	JOSEPH HSIA	08/30/96	scale
				appd	JENN TSAO	08/30/96	1.5:1
sheet	revision	D	D	D			
index	sheet	1	2	3			

PDM: Rev:D STATUS Released Printed: Oct 12, 2010

Tous droits strictement réservés. Toute réimpression ou communication sans autorisation écrite du propriétaire. Property of BERG ELECTRONICS. All rights strictly reserved. Reproduction or communication without written authority from the proprietor. Copyright BERG ELECTRONICS by


All rights strictly reserved. Reproduction or issue to third parties in any form without the written authority of BERG ELECTRONICS. Property of BERG ELECTRONICS. All rights strictly reserved. Reproduction or issue to third parties in any form without the written authority from the proprietor. Copyright BERG ELECTRONICS by

PRODUCT NO.
61572-200CA/200CALF

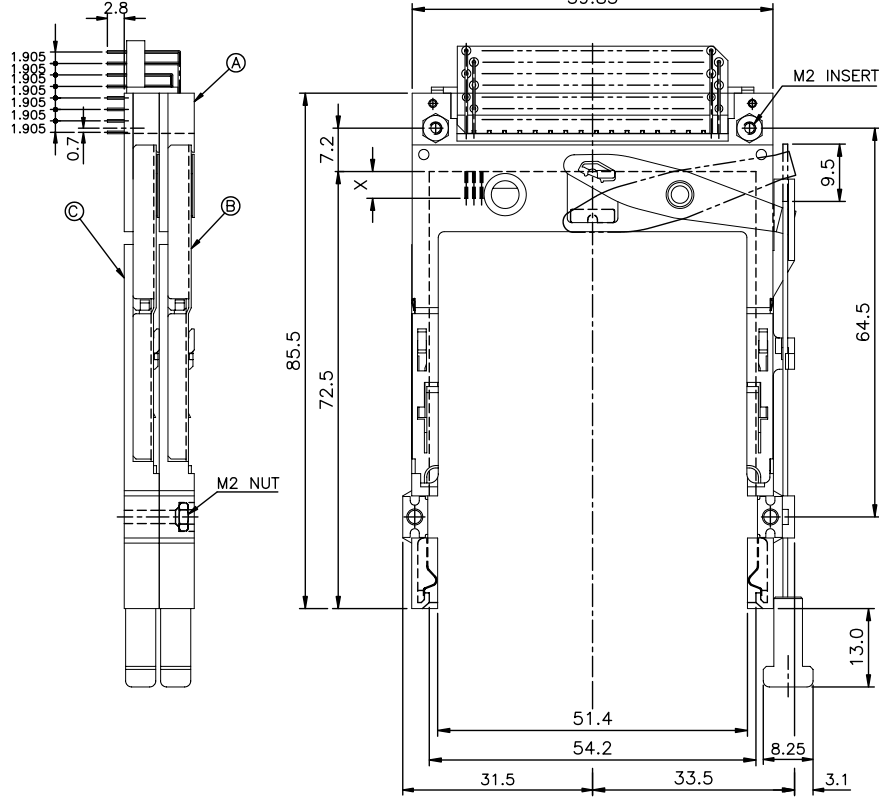


- NOTES:
- EJECT FORCE : 3.5 Kg MAX.
 - EJECT TRAVEL: 8.0mm
 - MATERIAL
 - PART (A) (HEADER ASS'Y)
PLASTIC : HOUSING ...LCP UL94V-0 BLACK
LOCATOR ...G.F. 6/6 NYLON UL94-VO BLACK
PIN : PHOSPHOR BRONZE
 - PART (B) AND (C) (EJECT MECHANISM ASS'Y)
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-0 BLACK
PUSH ROD: POLYPHTHARAMID UL94V-0 BLACK
PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
 - FINISH (PIN)
UNDER PLATING : 0.5µm MIN. Ni
CONTACT AREA : 0.1µm MIN. GOLD OVER 0.5µm MIN. Pd-Ni
SOLDER TAIL (TIN LEAD OPTION): 2.5µm MIN. Sn-Pb
SOLDER TAIL (LEAD FREE OPTION): 2.5µm MIN. PURE TIN
 - DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68
 - IF LEAD FREE P/N THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
 - IF LEAD FREE P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

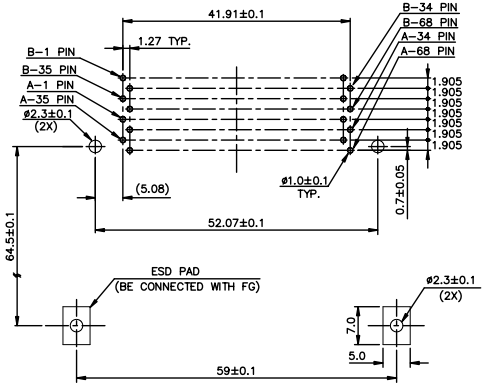

USE THE FOLLOWING P/N FOR OFFICIAL ORDERING


(C) EJECT MECH ASS'Y	61571-00CA
(B) EJECT MECH ASS'Y	95627-00CA
(A) HDR ASS'Y	92821-000/000LF
DESCRIPTION	P/N

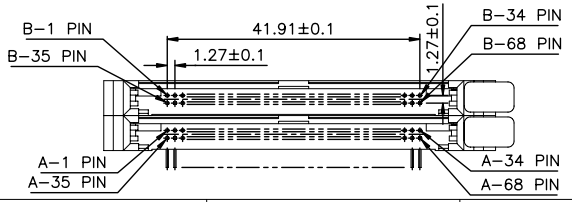

mat'l code	tolerance unless otherwise specified	CUSTOMER COPY	FCI ELECTRONICS	
rev. D	linear ±0.30	projection	title NARROW BODY FRONT EJECTOR TYPE 1/2/3 EJECTOR ASS'Y	
	angles ± 2°	unit mm/inch	product family : PCMCIA	code TWIN
	dr WENDY CHEN 01/07/97	scale 1.5:1	size A3	sheet 2 of 6
	enr JOSEPH HSIA 01/07/97		dwg no. 61572	
	chr JOSEPH HSIA 01/07/97			
	appd JENN TSAO 01/07/97			
sheet index	revision sheet			

PDM: Rev:D STATUS Released Printed: Oct 12, 2010


PRODUCT NO.
61572-300CA/300CALF

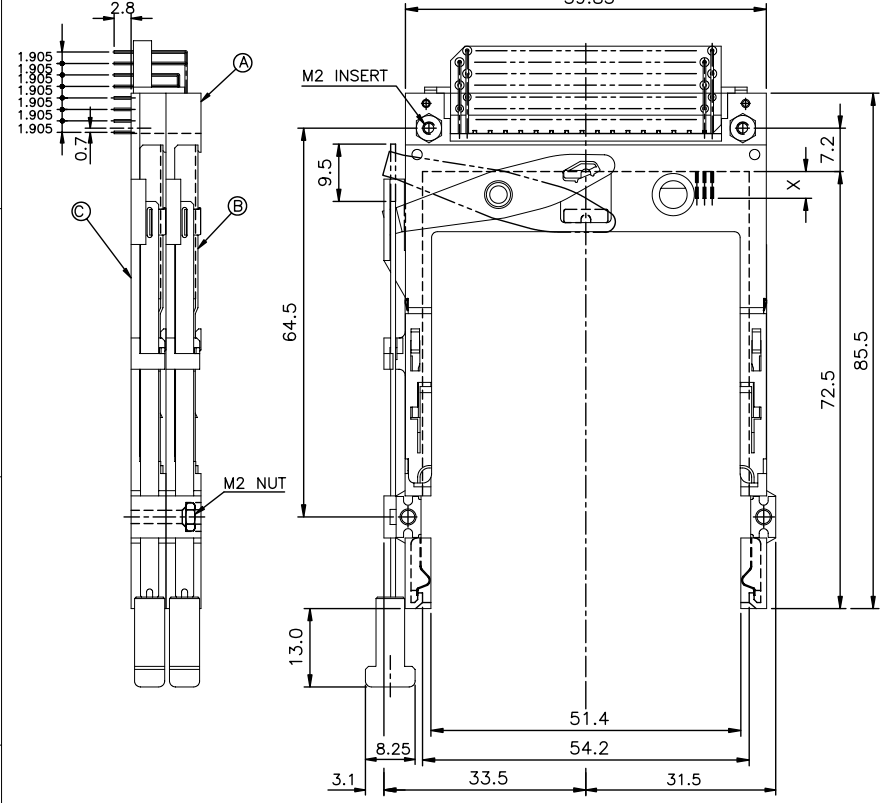

- NOTES:
- EJECT FORCE : 3.5 Kg MAX.
 - EJECT TRAVEL: 8.0mm
 - MATERIAL
 - PART A (HEADER ASS'Y)
PLASTIC : HOUSING ...LCP UL94V-0 BLACK
LOCATOR ...G.F. 6/6 NYLON UL94-VO BLACK
PIN : PHOSPHOR BRONZE
 - PART B AND C (EJECT MECHANISM ASS'Y)
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-0 BLACK
PUSH ROD: POLYPHTHARAMID UL94V-0 BLACK
PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
 - FINISH (PIN)
UNDER PLATING : 0.5µm MIN. Ni
CONTACT AREA : 0.1µm MIN. GOLD OVER 0.5µm MIN. Pd-Ni
SOLDER TAIL (TIN LEAD OPTION): 2.5µm MIN. Sn-Pb
SOLDER TAIL (LEAD FREE OPTION): 2.5µm MIN. PURE TIN


DIM "X"	4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68	

- IF LEAD FREE P/N THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM THICK CIRCUIT BOARD.
- IF LEAD FREE P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

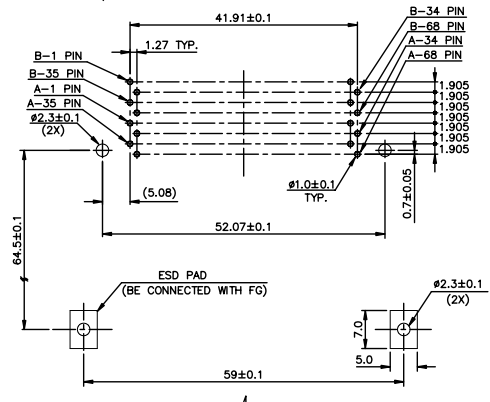

USE THE FOLLOWING P/N FOR OFFICIAL ORDERING

© EJECT MECH ASS'Y	61571-10CA
ⓑ EJECT MECH ASS'Y	95627-10CA
Ⓐ HDR ASS'Y	92821-000/000LF
DESCRIPTION	P/N

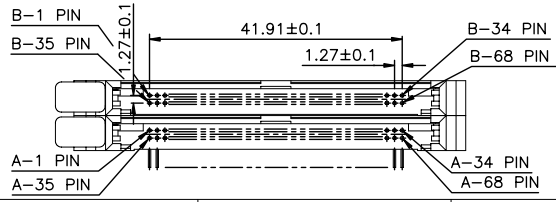

mat'l code	tolerance unless otherwise specified	CUSTOMER COPY	ELECTRONICS	
rev. ecn no. dr date	linear ±0.30	projection	FCI	
	angles ± 2°	unit	title	
dr WENDY CHEN 07/22/99		mm/inch	NARROW BODY FRONT EJECT TYPE 1/2/3 EJECTOR ASS'Y	
enrg JOSEPH HSIA 07/22/99		scale	product family : PCMCIA	code
chr JOSEPH HSIA 07/22/99		1.5:1	size dwg no.	TWN
appd LELAND WANG 07/22/99			61572	sheet 3 of 3
sheet index	revision sheet			

PDM: Rev:D STATUS Released Printed: Oct 12, 2010