


IEC appliance outlet F, screw-on mounting, front side, solder/quick connect terminal



6600-3



Description

- Panel Mount:
- Screw-on from front side
- Outlet, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Other versions on request

- Types for rivet mounting available upon request

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data


Ratings IEC	10A / 250VAC; Hz 50
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Screw-on: max 8mm Mounting screw torque max 0.5Nm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet /-Outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 10A, Protection class I
--------------------------	---

Dimensions

6600-3

Length 50 mm

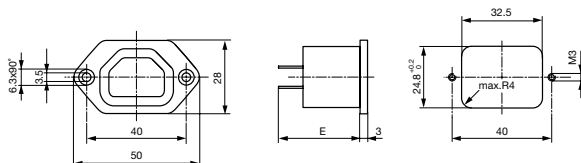

- E = solder terminals 3.5x0.8mm 24.1 mm
- E = quick connect terminals 4.8x0.8mm 26.5 mm
- E = quick connect terminals 6.3x0.8mm 27.5 mm

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)


Variants[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
Screw-on	-	Quick connect terminals 4.8 x 0.8 mm	6600.3200
Screw-on	-	Quick connect terminals 6.3 x 0.8 mm	6600.3300
Screw-on	-	Solder terminals 3.8 x 0.8 mm	6600.3100

1) Minimum order quantity for rivet mount types required

Cord retaining clamp and insulation cover see accessoires

Packaging unit 50 Pcs

Accessory**Description**

[Assorted Covers](#)
Rear Cover



[Cord retaining kits](#)
Cord retaining strain relieve