


Strip Block for Snap Mounting with up to 7 IEC Appliance Outlets C14

**Description**

- Panel Mount:
- Snap-In Version from front side
- 2 Functions:
 - Module of 2 up to 7 outlets, Pin temperature 70 °C, Protection class I
- Solder terminals

Characteristics

- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- Other panel thickness


Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check

Technical Data

Ratings IEC	10A / 250VAC; Hz 50
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals
Panel Thickness s	Snap-in 1.5 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet /-Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 10A, Protection class I
--------------------------	--

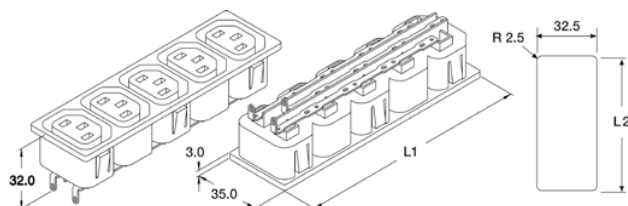Dimensions

Variants[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Panel Thickness s [mm]	Appliance outlet	Length L1 [mm]	Length L2 [mm]	Order Number
1.5	2	51.2	48.3	0909.0001
1.5	3	75.2	72.3	0909.0011
1.5	4	99.2	96.3	0909.0021
1.5	5	123.2	120.3	0909.0031
1.5	6	147.2	144.4	0909.0041
1.5	7	171.2	168.4	0909.0051

Packaging unit 120 Pcs**Accessory****Description**

[Cord retaining kits](#)
Cord retaining strain reliefe