

CONFIDENTIAL

rev	ecn no	dr	date
A	S10103	JPEH	2001-07-31
B	S10139	JPEH	2001-10-03
C	S20092	JPEH	2002-07-19
D	S05-0007	KBM	2005-01-19
E	S09-0058	KHL	2009-02-24
F	S09-0253	NBR	2009-08-18

www.fciconnect.com		surface -	tolerance std	projection	MM / INCH
Dr	JPEH	ISO 1302	ISO 406 ISO 1101	MM / INCH	Scale 10:1
Eng	JPEH	TOLERANCES UNLESS OTHERWISE SPECIFIED		size	A3
Chr	KH LEE	ANGULAR	LINEAR	ECN	S09-0253
Appr	JOEY NG	0.X	±0.3	Product family	LPVCC
		0.XX	±.13	Spec ref	-
		0.XXX	±.051		
LOW PROFILE VCC 2.3 TOP ENTRY SMT ASSY		dwg no	55508	Rev.	F
catalog no		CUSTOMER		sheet 1 of 2	

Copyright FCI

REV F - 2009-04-17

FDM: Rev:F STATUS: Released Printed: Nov 27, 2010

PRODUCT NO (5) (6)	POSITIONS	DIM. A	DIM. B
55508-X04	2 X 2	2.00 / .079	3.92 / .154
-X06	2 X 3	4.00 / .158	5.92 / .233
-X08	2 X 4	6.00 / .236	7.92 / .312
-X10	2 X 5	8.00 / .315	9.92 / .391
-X12	2 X 6	10.00 / .394	11.92 / .469
-X14	2 X 7	12.00 / .472	13.92 / .548
-X16	2 X 8	14.00 / .551	15.92 / .627
-X18	2 X 9	16.00 / .630	17.92 / .706
-X20	2 X 10	18.00 / .709	19.92 / .784
-X22	2 X 11	20.00 / .787	21.92 / .863
-X24	2 X 12	22.00 / .866	23.92 / .942
-X26	2 X 13	24.00 / .945	25.92 / 1.020
-X28	2 X 14	26.00 / 1.024	27.92 / 1.099
-X30	2 X 15	28.00 / 1.102	29.92 / 1.178
-X32	2 X 16	30.00 / 1.181	31.92 / 1.257
-X34	2 X 17	32.00 / 1.260	33.92 / 1.335
-X36	2 X 18	34.00 / 1.339	35.92 / 1.414
-X38	2 X 19	36.00 / 1.417	37.92 / 1.493
-X40	2 X 20	38.00 / 1.496	39.92 / 1.572
-X42	2 X 21	40.00 / 1.575	41.92 / 1.650
-X44	2 X 22	42.00 / 1.654	43.92 / 1.729
-X46	2 X 23	44.00 / 1.732	45.92 / 1.808
-X48	2 X 24	46.00 / 1.811	47.92 / 1.887
-X50	2 X 25	48.00 / 1.890	49.92 / 1.965

- NOTES:
- HOUSING MAT'L : HIGH TEMP PLASTIC.
 - TERMINAL MAT'L : PHOSPHOR BRONZE.
 - TERMINAL RETENTION 0.5Kg/1.1 Lbs
 - 'V' CUT OPTIONAL - MANUFACTURING PROCESS OPTION.
 - SOLDER TAILS OF P/N:55508-XXX IS TIN/LEAD PLATED.
 - SOLDER TAILS OF P/N:55508-XXXLF IS 100% MATTE TIN PLATED.
 - PRODUCT DESCRIPTION CODE:
XXXXX-XXXLF

PLATING OPTIONS OVER CONTACT AREA	
0	= 0.05µm/2µ"Au
1	= 0.76µm/30µ"Au
3	= 0.38µm/15µ"Au

- XXXXX-XXXLF
- LEAD FREE (6) (11)
 - EXTENSION NUMBER
 - BASE NUMBER
- PACKAGING:
 - (a) XXXXX-XXX ---STD PACKAGING IN TUBE.
 - (b) XXXXX-XXXTR ---TAPE AND REEL PACKAGING WITH PICK-UP CAP (SEE FIG 1).
 - (c) XXXXX-XXXTRN ---TAPE AND REEL PACKAGING WITHOUT PICK-UP CAP.
 - CO-PLANARITY:
 - FROM POSITION - X04 THRU -X38 : 0.10 / .004
 - X40 THRU -X50 : 0.12 / .005
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 255°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

(11) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

⚠ 12. A ⚠ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

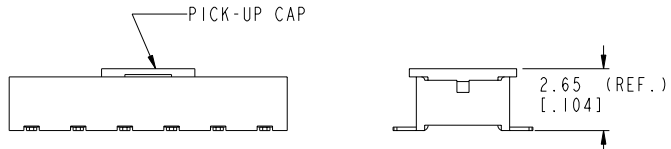


FIG. 1

www.fciconnect.com		surface -	tolerance std	projection	MM / INCH	
		ISO 1302	ISO 406 ISO 1101	⊕		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			size A3	Scale 10:1
Dr	JPEH	2002-07-19	ANGULAR	0.X	±0.3	
Eng	JPEH	2002-07-19	LINEAR	0.XX	±.13	
Chr	KH LEE	2009-08-18	0° ±2°	0.XXX	±.051	
Appr	JOEY NG	2009-08-18	Product family	LPVCC	Spec ref -	
		LOW PROFILE VCC 2.3 TOP ENTRY SMT ASSY		dwg no 55508	Rev. F	
catalog no		CUSTOMER		sheet 2 of 2		

CONFIDENTIAL

Copyright FCI.

REV F - 2006-04-17