



Audio

NEUTRIK

Deutsche Version

Home
About Us
Products
Support
News
Sitemap

Search

Products only

© Neutrik® AG
All rights reserved
Legal Notices



Audio

Cable Connectors

[back](#)

[Print](#)

NL4FX



4 pole cable connector, chuck type strain relief, dark grey bushing





The industry-standard for loudspeaker connections offer extremely reliable and robust cable connectors with a reliable locking system. They feature solid contacts with screw-type terminals including a stranded wire protection which offer also solder termination.

Features & Benefits

- Current rating 40 A rms continuous
- Up to 50 A audio signal, duty cycle 50%
- Only 3 parts, easy to assemble
- High impact materials - long-lasting and reliable
- Easy and extremely precise locking system "Quick Lock"
- Improved grip on latch
- 1 piece strain relief, chuck for 7 to 14.5 mm cable O.D.
- Color coding possible
- Improved screw-type termination for highest pull-out force
- Integrated design guarantees "Made by Neutrik®"

ACCESSORIES



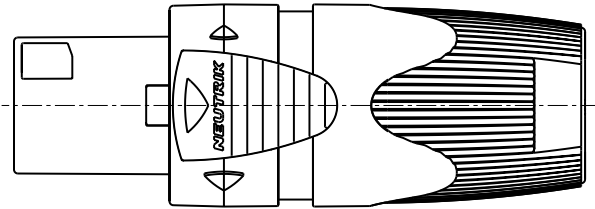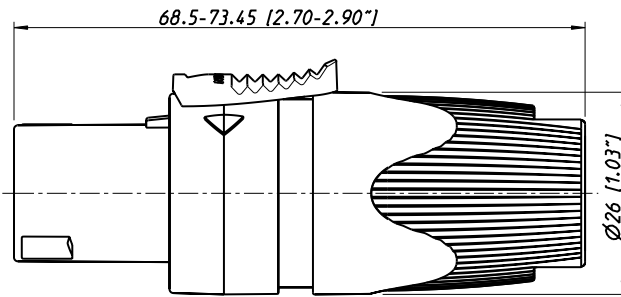


1:1

Allgemeintoleranzen ISO 2768-m	Werkstoff	Kunststoff		Datum	Name
	KEIN_MAT	2:1 (A3)	Gezeichnet	08.06.01	Dobler
Zeichnung urheberrechtlich geschützt (DIN 34) (K)	-	-	Freigegeben	-	-
Benennung	NEUTRIK AG	FL-9494 SCHAAN	Geändert	08.06.04	Payr
Speakon NL4FX			Änd.-Nr.	168-2004	Änd.-Index B
			Ersatz fuer:		Blatt 1 von 1 Bl.
			Zeichn. Nr.		ST-NL4FX



NL4FX

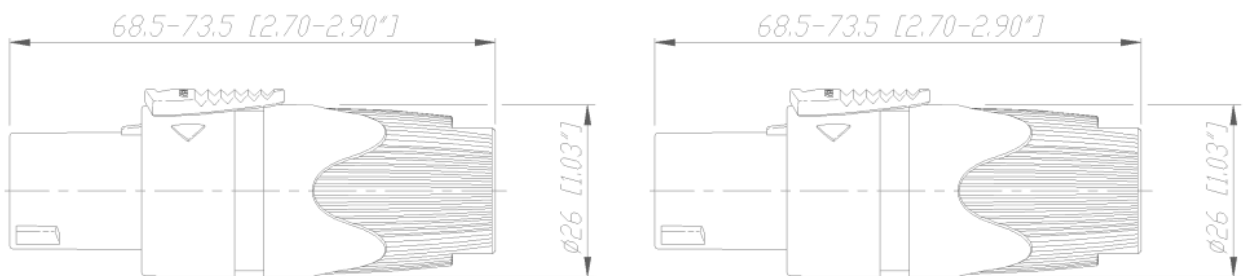

There are no technical infos for this product.

Product	
Connector Type	Speakon
Gender	female
Electrical	
Contact resistance	< 2 m Ω (after lifetime)
Dielectric strength	4 kVdc (peak)
Insulation resistance	> 1 G Ω (after dampheat)
Rated current per contact	40 A rms continuous
Rated current per contact	50 A audiosignal, duty cycle 50 %
Rated voltage	250 V (Insulation)
Mechanical	
Cable O.D.	7 - 14.5 mm
Cable retention force	\geq 220 N (subject to cable O.D. and material)
Lifetime	> 5000 mating cycles
Wire size	4 mm ² / 6 mm ² (screw type terminals/soldering)
Wire size	12 AWG / 10 AWG
Wiring	screw type terminals or soldering
Locking device	Quick Lock (latch)
Material	

Bushing	Polyamide (PA 6 15% GR) black
Contact plating	4 µm Ag
Contacts	Brass (CuZn39Pb3)
Insert	PBTP 20 % GR
Locking element	Zinc diecast (ZnAl4Cu1)
Shell	PBTP 20 % GR
Strain relief	Polyacetal (POM)
Environmental	
Approvals	UL, CSA
Flammability	UL 94 HB
Solderability	Complies with IEC 68-2-20
Temperature range	-30 °C to +80 °C
Optical	
Mobile Cables	