

Audio





Version Home

About Us

Products

Support

News Sitemap

Search

Products only


© Neutrik® AG All rights reserved Legal Notices



NYS228



 $\ensuremath{\ensuremath{\mathcal{V}}}_4$ " plug, 3-pole, long turned brass handle, no rivet

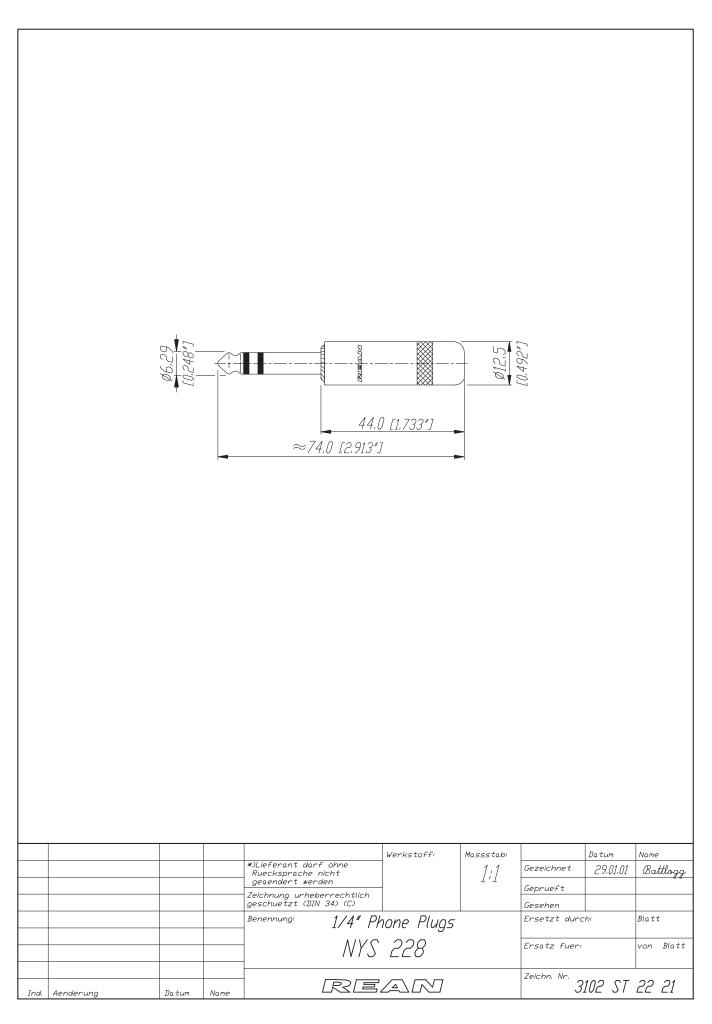





NYS 1/4" Plugs

NYS228

There are no technical infos for this product.

p	
Product	
Electrical	
Contact resistance	$<$ 10 m Ω
Dielectric strength	0,5 kVdc
Rated current per contact	depends on mated connector A
Mechanical	
Cable O.D.	≤ 6 mm
Wire size	24 AWG
Material	
Contact plating	2 μm Ni
Contacts	CuZn39Pb3
Insert	PA 66 30 % GR+insulation board
Shell	CuZn39Pb3 gal 2 ?m Ni plated
Environmental	
Solderability	Complies with IEC 68-2-20
Temperature range	-20 °C to +70 °C
Optical	
Mobile Cables	