


## NA3FJ



3 pole XLR female - Stereo 1/4" locking jack (Tip, Ring, Sleeve contact)

### Features & Benefits

- Versatile, pre-wired and ready to use adapters to reliably interlock various connector systems
- Professional look and compact space saving design, based on the XX Series
- Rugged diecast shell for best reliability

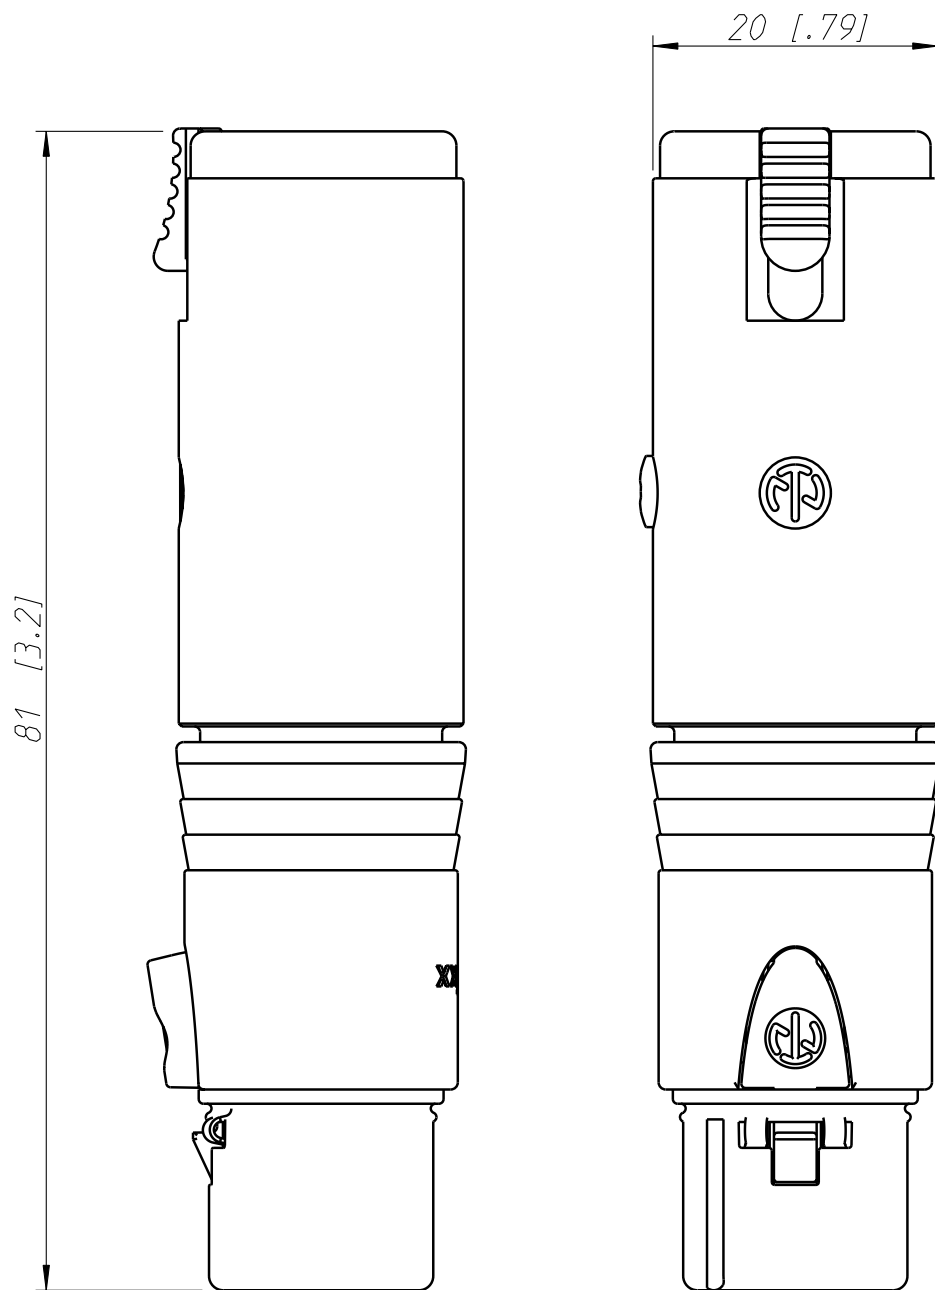

Allgemeintoleranzen ISO 2768-m	Werkstoff	Massstab:		Datum	Name
Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)	KEIN_MAT	2:1	Gezeichnet	15.05.98	Alinjak
	-	(A4)	Freigegeben	-	-
			Geaendert	28.03.07	Koch
Benennung			Aend.-Nr.	Aend.-Index	
NA3FJ			-	A	
NA3FJ			Ersatz fuer:	Blatt 1 von 1 Bl.	
NEUTRIK AG FL-9494 SCHAAN			Zeichn. Nr.	ST-NA3FJ	



# Circular Adapters

## NA3FJ

There are no technical infos for this product.

Product	
Connector Type	Adapter
Electrical	
Contact resistance	$\leq 3 \text{ m}\Omega$ (XLR)
Dielectric strength	1.5 kV dc / $> 1 \text{ kVdc}$ (XLR/Jack)
Insulation resistance	$> 2 \text{ G}\Omega$
Mechanical	
Locking device	Latch lock
Material	
Contact plating	2 $\mu\text{m}$ Ag
Contacts	Bronze (CuSn6) (XLR female)
Contacts	Bronze (CuBe2) (jack)
Insert	Polyamide (PA 6.6 30 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	gal Cu/Ni
Environmental	
Temperature range	-20 °C to +65 °C
Optical	
Mobile Cables	