



Audio

NEUTRIK

Deutsche Version

- Home
- About Us
- Products
- Support
- News
- Sitemap

Search

Products only

© Neutrik® AG
All rights reserved
Legal Notices



Audio

1/4" Prof. Phone Plugs, C-Series

[back](#)

[Print](#)

NP2C



2 pole 1/4" professional phone plug, Nickel housing, Nickel contacts

Professional phone plug with robust metal shell and chuck type strain relief.


Features & Benefits

- Rugged diecast metal shell
- Chuck type strain relief for optimum cable protection
- Precision machined one-piece contacts - avoid hook up of tip contact
- Meets all prevailing standards


ACCESSORIES



NP2C

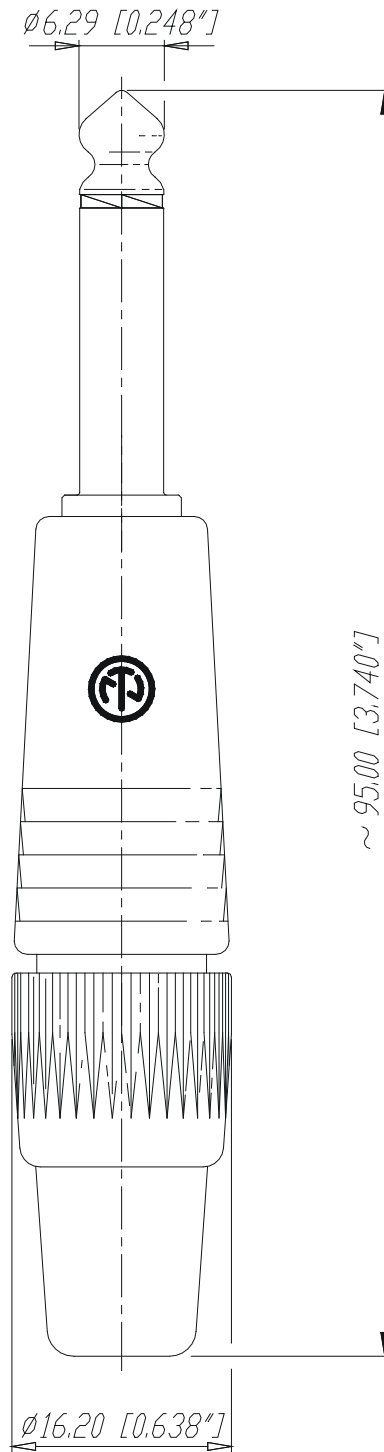


					Werkstoff:	Massstab:		Datum	Name	
				*Lieferant darf ohne Ruecksprache nicht geaendert werden		2:1	Gezeichnet	10.08.98	Alinjak	
				Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)			Geprueft			
				Benennung:	1/4" Phone Plugs NP2C		Ersetzt durch:	Blatt		
							Ersatz fuer:	von Blatt		
				NEUTRIK AG FL-9494 SCHAAN			Zeichn. Nr.	3102 St 06 01		
Ind.	Aenderung	Datum	Name							

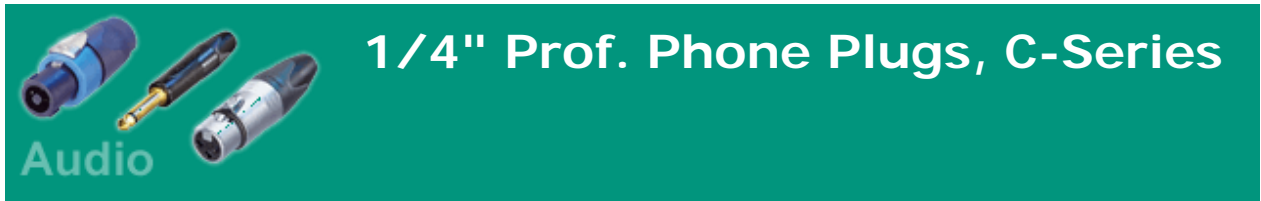

1/4" Prof. Phone Plugs, C-Series

NP2C

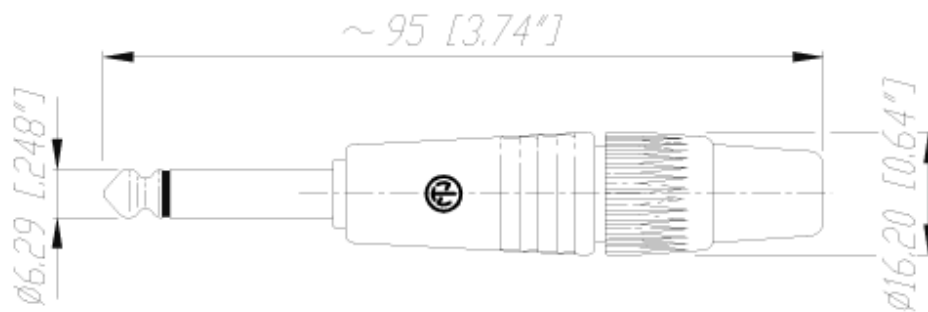

There are no technical infos for this product.

Product

Connector Type	Plug
Gender	male

Electrical

Contact resistance	depends on mating connector mΩ
Dielectric strength	1 kVdc
Insulation resistance	> 2 GΩ (initial)
Insulation resistance	≥ 1 GΩ (after damp heat test)
Rated current per contact	≤ 15 A

Mechanical

Cable O.D.	4 - 7 mm
Wire size	1 mm ²
Wire size	18 AWG
Wiring	Solder contacts

Material

Bushing	Polyacetal (POM) + PU
Contact plating	2 μm Ni (Su)
Contacts	Brass (CuZn39Pb3)
Insert	Polyamide (PA 6.6 30 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Nickel
Strain relief	Polyacetal (POM)

Environmental

Standard compliance	IEC 60603-11 / EIA RS-453
Solderability	Complies with IEC 68-2-20
Temperature range	-20 °C to +65 °C

Optical

Mobile Cables