


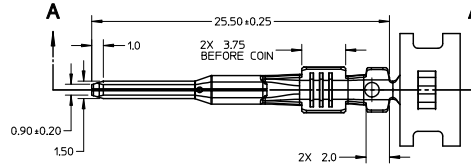


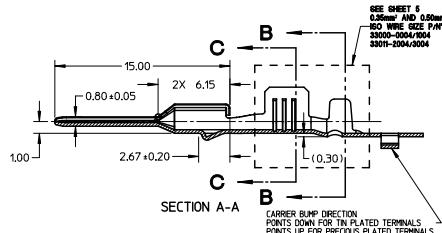


13 12 11 10 9 8 7 6 5 4 3 2 1



ISO VIEW
SCALE 2:1




SEE SHEET 6
0.30mm AND 0.50mm
ISO WIRE SIZE P/PG
3300-0004/004
3301-0004/004

CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINALS
POINTS UP FOR PRECIOUS PLATED TERMINALS

GENERAL NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATING TERMINAL SHOWN ON SD-33012-002
2. MATERIAL: ASTM B422, UNS C19025, HR04
THICKNESS: 0.30 mm ±0.01
TEMPER: FULL HARD (REF)
TENSILE: 496-572 MPA
3. TIN PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED NICKEL
OVERALL ELECTRODEPOSITED REFLOW TIN
4. GOLD PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED GOLD
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
5. SILVER PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED PURE SILVER (0.5% MAX IMPURITIES) SEM-BRIGHT FINISH
- SILVER ANTI-TARNISH + EVABRITE
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
6. MEETS CRMP PERFORMANCE SPECIFICATION SAE/JC-21 (RELEASED: 08/25/01)
7. MEETS PERFORMANCE STANDARD FOR AUTOMOTIVE ELECTRICAL CONNECTOR SYSTEMS SAE/JC-21 REV 3 (APRIL 2001)
8. MEETS FIELD CORRELATED LIFE TEST SAE/JC-20 (NOVEMBER 2001)
9. MEETS WIRING COMPONENT DESIGN GUIDELINES SAE/JC-12 REV 2 (DECEMBER 2001)
10. MEETS ELECTRICAL CONNECTION SYSTEM DESIGN SPECIFICATION (SDS) REV 11 (5/2002)
11. REFERENCE PK-31900-516 FOR REEL DIRECTION
12. REFERENCE AS-33000-001 FOR CRMP INFORMATION

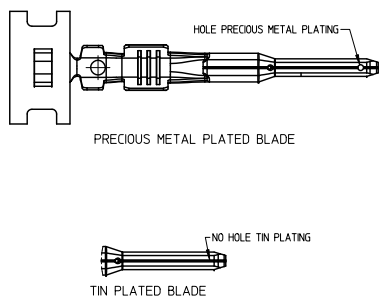

ENTER DESCRIPTION EC NO.: UAU201-0539 DRAWN: HENOS 2011/01/12 CHKD: APPR: BMOSE REV: 1	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		mm	INCH	MM ONLY	DATE	4:1	METRIC	
		4 PLACES ±	+	DRAWN BY	DATE	TITLE		
		3 PLACES ±	+	L. PULLIAM	2006/01/31	MX150 15MM BLADE TERMINAL		
		2 PLACES ±	0.1	CHECKED BY	DATE			
		1 PLACE ±	0.3	A. DHIR	2006/02/01			
		ANGULAR ± 3 °		APPROVED BY	DATE			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		B. MOSE	2006/02/02			
		SEE TABLE		MATERIAL NO.		DOCUMENT NO.		SHEET NO.
		C		SD-33000-001		SD-33000-001		1 OF 5

12 11 10 9 8 7 6 5 4 3 2 1





13 12 11 10 9 8 7 6 5 4 3 2 1

TABLE										
SUPPLIER PART NUMBER		PLATING	GRIP CODE	WIRE APPLICATION		A ±0.30	B ±0.30	C ±0.30	D ±0.30	COMMENTS
RIGHT PAYOFF DIRECTION B	LEFT PAYOFF DIRECTION D			SAE (AWG)	METRIC (mm ²)					
33000-0001	33000-1001	TIN	14	14	2.0-15	3.9	3.8	1.7	1.6	
33000-0002	33000-1002	TIN	18	16/18/20	1.0-0.75	3.3	3.1	1.3	1.4	
33000-0003	33000-1003	TIN	22	22	0.35-0.50	2.5	2.6	0.9	1.0	
33000-0004	33000-1004	TIN	M3	N/A	0.35-0.50	2.5	2.7	0.9	154±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm)
33011-1002	33011-0002	GOLD	14	14	2.0-15	3.9	3.8	1.7	1.6	
33011-1004	33011-0004	GOLD	18	16/18/20	1.0-0.75	3.3	3.1	1.3	1.4	
33011-1006	33011-0006	GOLD	22	22	0.35-0.50	2.5	2.6	0.9	1.0	
33011-2003	33011-3003	SILVER	14	14	2.0-15	3.9	3.8	1.7	1.6	NOT TO BE USED IN CONNECTOR SYSTEMS WITH CIRCUIT COUNTS HIGHER THAN 8 DUE TO HIGHER CONNECTOR MATE/UNMATE FORCE
33011-2002	33011-3002	SILVER	18	16/18/20	1.0-0.75	3.3	3.1	1.3	1.4	
33011-2001	33011-3001	SILVER	22	22	0.35-0.50	2.5	2.6	0.9	1.0	
33011-2004	33011-3004	SILVER	M3	N/A	0.35-0.50	2.5	2.7	0.9	154±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm) USE IN CLASS 3 (125° C) APPLICATIONS ONLY

ENTER DESCRIPTION EC NO: UA0201-0559 DRAWN: RENUS 2011/01/12 CHKD: APPR: BMOSER 2011/01/20 C11	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM ONLY		METRIC	
	▽=0	4 PLACES ±--- ±---	DRAWN BY DATE	TITLE		
	▽=0	3 PLACES ±--- ±---	L. PULLIAM 2006/01/31	MX150 15MM BLADE TERMINAL		
▽=0	2 PLACES ±0.1 ±---	CHECKED BY DATE	MOLEX INCORPORATED			
	1 PLACE ±0.3 ±---	A. DHIR 2006/02/01	MATERIAL NO. DOCUMENT NO.			
	ANGULAR ± 3 °	APPROVED BY DATE	SD-33000-001			
		B. MOSER 2006/02/02	SEE TABLE			
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			SHEET NO. 2 OF 5			




1b_frame_C.P.AM.T Rev. F 2009/06/18 12 11 10 9 8 7 6 5 4 3 2 1

13 12 11 10 9 8 7 6 5 4 3 2 1

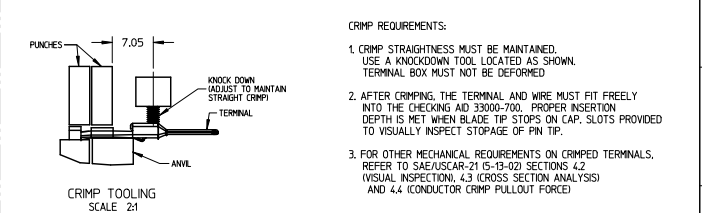
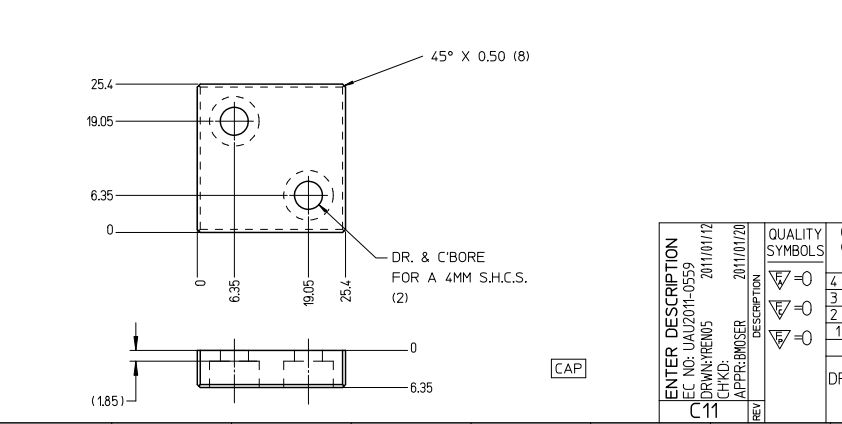
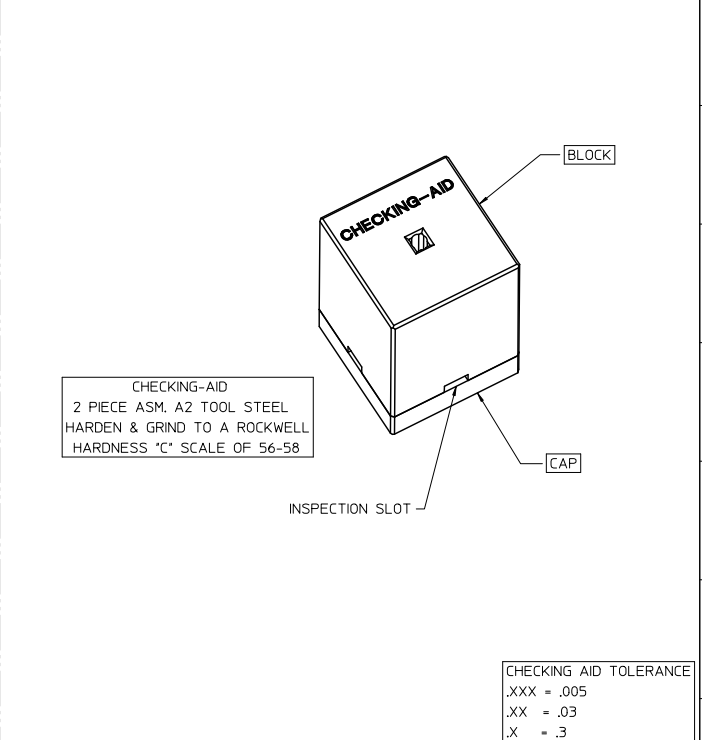
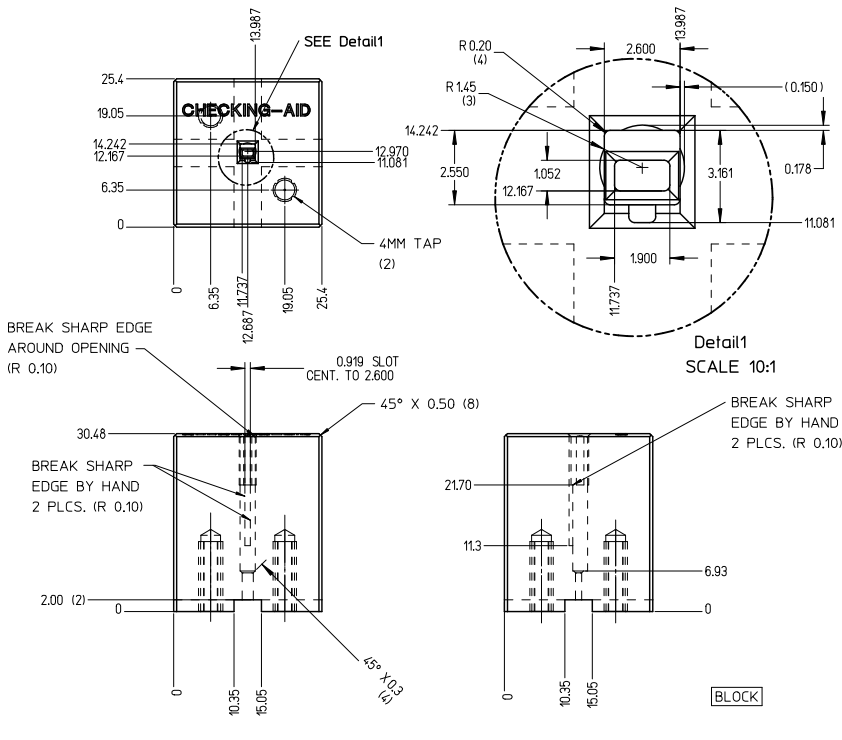


ENTER DESCRIPTION EC NO: UAU201-0559 DRAWN: HENUS 2011/01/12 CHKD: APPR: BMOSER 2011/01/20 C11	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		4 PLACES ± .012 ± .015 3 PLACES ± .015 ± .020 2 PLACES ± .020 ± .025 1 PLACE ± .025 ± .030	mm INCH	DRAWN BY L. PULLIAM 2006/01/31	DATE	TITLE MX150 15MM BLADE TERMINAL					
		ANGULAR ± 3°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	CHECKED BY A. DHIR 2006/02/01	DATE	MATERIAL NO. SD-33000-001					
		APPROVED BY B. MOSER 2006/02/02	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		MOLEX INCORPORATED		DOCUMENT NO.	SHEET NO. 3 OF 5		

12 11 10 9 8 7 6 5 4 3 2 1

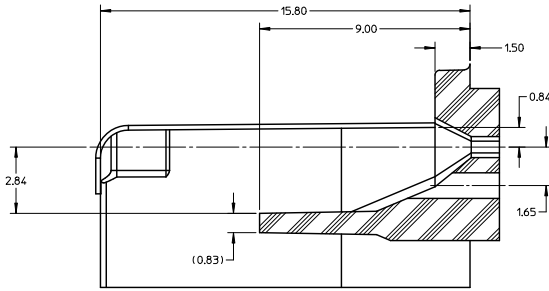

SECTION D-D TPA/INSERT DETAIL

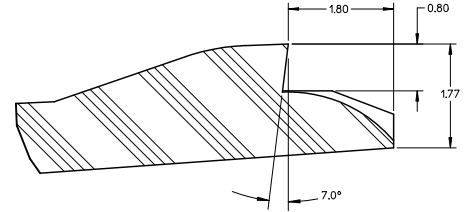
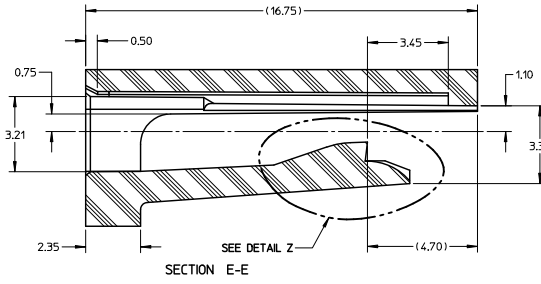



DETAIL Z SCALE 20:1

HOUSING DETAIL

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. TOLERANCES: LINEAR ± 0.10
ANGULAR 3°
2. ALL DRAFT WITHIN TOLERANCE
3. MAX RADI ON ALL CORNERS SHOWN SHARP: 0.10
4. MAX FLASH PERMISSIBLE: 0.1
5. EJECTOR PIN MARKS PERMISSIBLE IF FLUSH TO 0.25 BELOW SURFACE
6. MATERIAL: HOUSING/FINGER SPECIFICATION ENGINEERED FOR MATERIAL WITH THE FOLLOWING PROPERTIES:
A. FLEXURAL MODULUS = 4500 TO 9400 MPa
PER ASTM TEST D790
B. ELONGATION AT YIELD = 2.3% OR BETTER
PER ASTM TEST D638 TYPE V
7. CAVITY SPEC FOR USE ONLY WITH MOLEX BLADE TERMINAL PART NUMBERS (EXCEPT P/N'S FOR UNSEALED APPLICATIONS) SPECIFIED ELSEWHERE ON THIS DRAWING

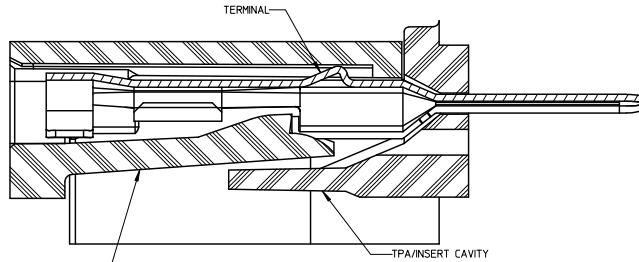


BLADE TERMINAL HOUSING CAVITY SECTION F-F


BLADE CAVITY ASSEMBLY VIEWS

ENTER DESCRIPTION EC NO.: UAU201-0559 DRAWN: HENOS 2011/01/12 CHKD: APPR: BMOSER 2011/01/20 REV:	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▽=0	mm	INCH	MM ONLY	DATE	TITLE	MOLEX	MOLEX INCORPORATED	SHEET NO.
	▽=0	4 PLACES ± --- ± ---	L. PULLIAM 2006/01/31	DATE	MX150 1.5MM BLADE TERMINAL				
	▽=0	3 PLACES ± --- ± ---	CHECKED BY	DATE					
▽=0	2 PLACES ± 0.1 ± ---	A. DHIR 2006/02/01	DATE						
	1 PLACE ± 0.3 ± ---	APPROVED BY	DATE						
	ANGULAR ± 3 °	B. MOSER 2006/02/02	DATE						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE		MATERIAL NO.	DOCUMENT NO.			4 OF 5	
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

13 12 11 10 9 8 7 6 5 4 3 2 1



ISO VIEW
SCALE 2:1

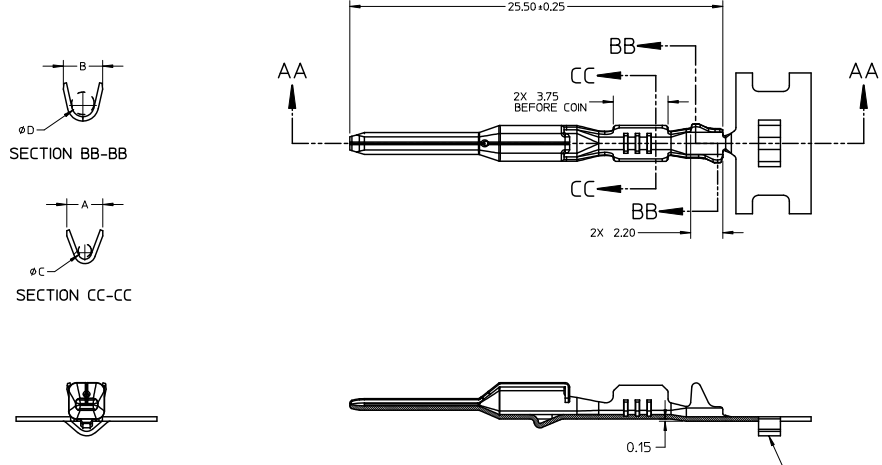

SECTION AA-AA
P/N'S 33000-0004/1004
33011-2004/3004

CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINALS
POINTS UP FOR PRECIOUS METAL PLATED
TERMINALS

ENTER DESCRIPTION EC NO: UJ0201-0539 DRAWN: RENOS 2011/01/12 CHKD: APPR: BMOSER 2011/01/20	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		4 PLACES ± 0.1 3 PLACES ± 0.15 2 PLACES ± 0.2 1 PLACE ± 0.3	mm INCH	DRAWN BY L. PULLIAM	DATE 2006/01/31	TITLE MX150 1.5MM BLADE TERMINAL					
		ANGULAR ± 3°		CHECKED BY A. DHIR	DATE 2006/02/01	APPROVED BY B. MOSER					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	MATERIAL NO. SD-33000-001	DATE 2006/02/02	MOLEX INCORPORATED DOCUMENT NO.					
C11	REV			SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

Id_frame_C_P_AM_T
Rev. F 2009/06/18

12 11 10 9 8 7 6 5 4 3 2 1