



Audio

**NEUTRIK**

 Deutsche Version

- Home
- About Us
- Products
- Support
- News
- Sitemap

Search

Products only

© Neutrik® AG  
All rights reserved  
Legal Notices



Audio

## NYS 1/4" Plugs


[back](#)

[Print](#)

### NYS201



1/4" plug, 2-pole, short turned brass handle

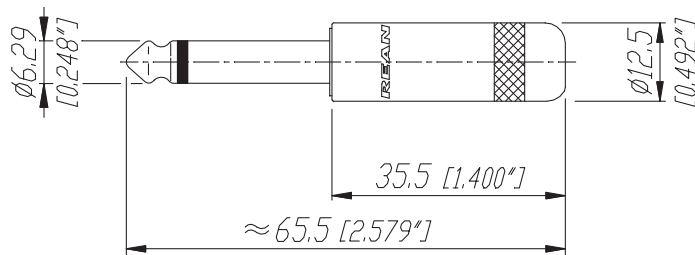

|      |           |       |      |  |                             |          |                |               |         |
|------|-----------|-------|------|--|-----------------------------|----------|----------------|---------------|---------|
|      |           |       |      |  | Werkstoff:                  | Maßstab: |                | Datum         | Name    |
|      |           |       |      | *Lieferant darf ohne<br>Ruecksprache nicht<br>geaendert werden |                             | 1:1      | Gezeichnet     | 29.01.01      | Batlogg |
|      |           |       |      | Zeichnung urheberrechtlich<br>geschuetzt (DIN 34) (C)          |                             |          | Geprueft       |               |         |
|      |           |       |      | Benennung:   | 1/4" Phone Plugs<br>NYS 201 |          | Gesehen        |               |         |
|      |           |       |      |  |                             |          | Ersetzt durch: | Blatt         |         |
|      |           |       |      |  |                             |          | Ersatz fuer:   | von Blatt     |         |
|      |           |       |      |  | REAN                        |          | Zeichn. Nr.    | 3102 ST 22 14 |         |
| Ind. | Aenderung | Datum | Name |  |                             |          |                |               |         |



## NYS 1/4" Plugs



### NYS201

There are no technical infos for this product.

| Product                   |                                |
|---------------------------|--------------------------------|
| Electrical                |                                |
| Contact resistance        | < 10 mΩ                        |
| Dielectric strength       | 0,5 kVdc                       |
| Rated current per contact | depends on mated connector A   |
| Mechanical                |                                |
| Cable O.D.                | ≤ 6 mm                         |
| Wire size                 | 24 AWG                         |
| Material                  |                                |
| Contact plating           | 2 μm Ni                        |
| Contacts                  | CuZn39Pb3                      |
| Insert                    | PA 66 30 % GR+insulation board |
| Shell                     | CuZn39Pb3 gal 2 ?m Ni plated   |
| Environmental             |                                |
| Solderability             | Complies with IEC 68-2-20      |
| Temperature range         | -20 °C to +70 °C               |
| Optical                   |                                |
| Mobile Cables             |                                |