


ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	PM5	LED Holder, Panel Mount, Press Fit, (5mm)
2	1	5XXX	T-1¼ (5mm) Non-Flange LED, See Page 2.
3	1	BWS24-1007-RD	24AWG Wire Lead U.L. 1007, Red
4	1	BWS24-1007-BK	24AWG Wire Lead U.L. 1007, Black
5	1	2665S020000	Leoco 2665 Series 2.54 (.100") Crimp Type Socket, 1x
6	2	2653TPB0001	Leoco Terminal# 2653TPB0001 (Reel), 2653TPB00A1 (Bulk)

REV.	DESCRIPTION	DATE	APPROVED
C	Added 5XXXL Specs	06/25/09	T. Y.
D	Updated 5XXXL Specs	06/26/09	T. Y.
E	Added PM5BWCWX.X-CC Specs	08/14/09	T. Y.
F	Added PM5UGCWX.X-CC Specs	08/19/09	T. Y.
G	Added 5BC-Y/G Specs	02/09/10	T. Y.

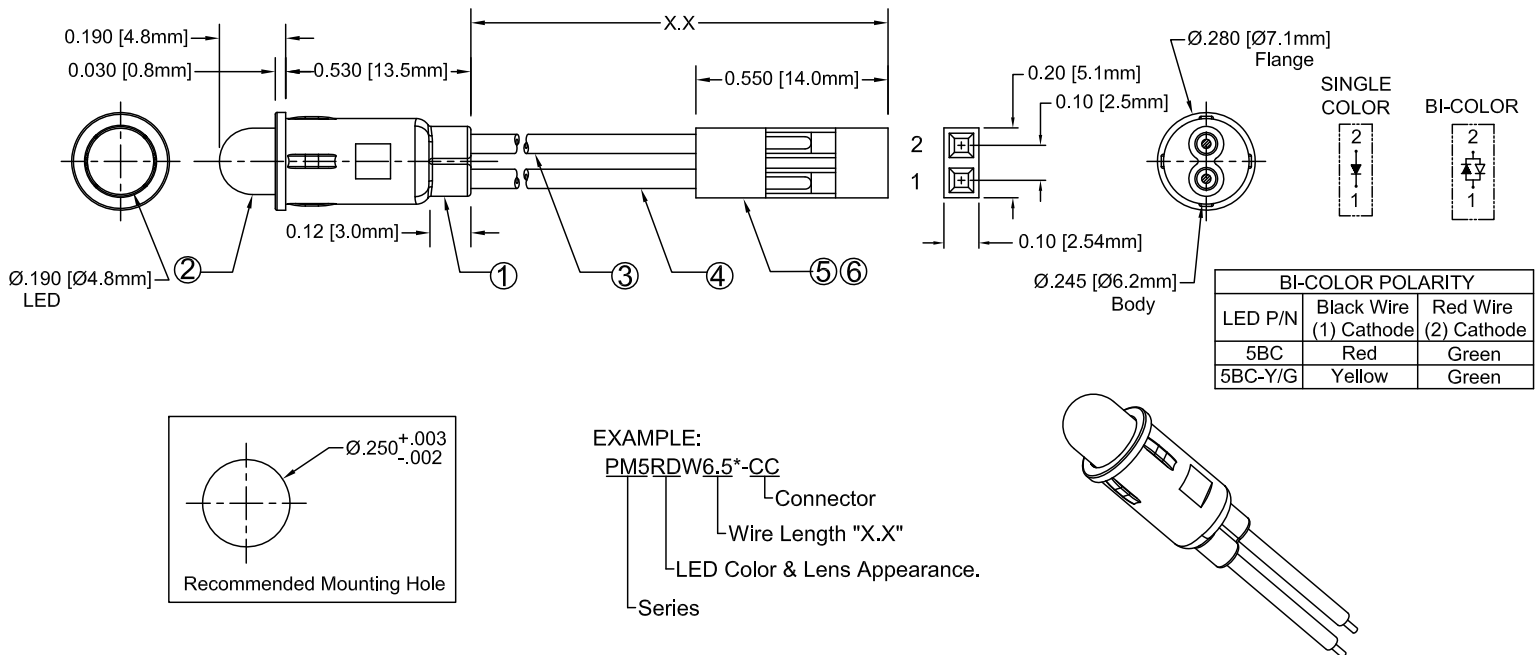

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

REVERSE VOLTAGE	5V
REVERSE CURRENT (VR=5V)	100µA
OPERATING TEMPERATURE RANGE	-25°C ~ 85°C
STORAGE TEMPERATURE	-30°C ~ 100°C
LEAD SOLDERING TEMPERATURE (1/16" FROM BODY)	260°C for 5 Seconds

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		BIVAR®	
DECIMALS	ANGULAR	4 THOMAS, IRVINE, CA, 92618	
.X ±.1	X° ±1°	TEL: (949) 951-8808 FAX: (949) 951-3974	
.XX ±.02		TITLE: T-1¼ (5mm) PANEL MOUNT ASSEMBLY	
.XXX ±.010		PART NO: PM5XXWX.X-CC	
DESIGNED: Dan Beckman	DATE: 06/28/07	REVISION: G	
CHECKED: T. Yin	DATE: 06/28/07	CAGE CODE : 32559	SHEET # 1 OF 2
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.			

REV.	DESCRIPTION	DATE	APPROVED
	SEE SHEET#1.		

LED Assy. No.	Peak Wave Length λp(nm)	Emitted Color	Lens Appearance	Electro-Optical Data @ 20mA				Viewing Angle 2θ ½ (Deg)	LED P/N	
				If (mA)		Vf (V)				Iv (mcd)
				MAX	TYP	MAX	TYP			
PM5BWCWX.X-CC	430	BLUE	WATER CLEAR	25	4.0	4.5	30	20	5BWC	
PM5BWTWX.X-CC	430	BLUE	TINTED	25	4.0	4.5	30	20	5BWT	
PM5UBWC.6KW.XCC	470	BLUE	WATER CLEAR	25	4.0	4.5	400	35	5UBWC-0.6K	
PM5GCWX.X-CC	568	GREEN	WATER CLEAR	30	2.1	2.8	40	35	5GC	
PM5GDWX.X-CC	568	GREEN	DIFFUSED	30	2.1	2.8	25	45	5GD	
PM5GTWX.X-CC	568	GREEN	TINTED	30	2.1	2.8	40	35	5GT	
PM5UGCWX.X-CC	570	ULTRA GREEN	WATER CLEAR	30	2.1	2.4	600	35	5UGC	
PM5YCW.X-CC	590	YELLOW	WATER CLEAR	30	2.0	2.8	40	35	5YC	
PM5YDW.X-CC	590	YELLOW	DIFFUSED	30	2.0	2.8	25	45	5YD	
PM5YTW.X-CC	590	YELLOW	TINTED	30	2.0	2.8	40	35	5YT	
PM5ACWX.X-CC	605	AMBER	WATER CLEAR	30	2.0	2.8	40	35	5AC	
PM5ADWX.X-CC	605	AMBER	DIFFUSED	30	2.0	2.8	25	45	5AD	
PM5ATWX.X-CC	605	AMBER	TINTED	30	2.0	2.8	40	35	5AT	
PM5HCWX.X-CC	625	HE RED	WATER CLEAR	30	2.0	2.8	40	35	5HC	
PM5HDWX.X-CC	625	HE RED	DIFFUSED	30	2.0	2.8	25	45	5HD	
PM5HTWX.X-CC	625	HE RED	TINTED	30	2.0	2.8	40	35	5HT	
PM5RCWX.X-CC	700	RED	WATER CLEAR	20	2.1	2.8	2	35	5RC	
PM5RDWX.X-CC	700	RED	DIFFUSED	20	2.1	2.8	2	45	5RD	
PM5RTWX.X-CC	700	RED	TINTED	20	2.1	2.8	2	35	5RT	
PM5SRCWX.X-CC	645	SUPER RED	WATER CLEAR	30	1.7	2.4	60	35	5SRC	
PM5SRDW.X-CC	645	SUPER RED	DIFFUSED	30	1.7	2.4	40	45	5SRD	
PM5SRTWX.X-CC	645	SUPER RED	TINTED	30	1.7	2.4	60	35	5SRT	
PM5UWC.8KW.XCC	X=29 Y=30	WHITE	WATER CLEAR	30	3.5	4.0	800	25	5UWC-0.8K	
PM5WC2.730WX.XCC	X=26 Y=27	WHITE	WATER CLEAR	35	3.5	4.2	2700	30	5WC2.730	
PM5BCWX.X-CC	625	HE RED	WHITE DIFFUSED	30	2.0	2.8	6	45	5BC	
	568	GREEN		30	2.1	2.8	8			
PM5BC-Y/GWX.X-CC	590	YELLOW	WHITE DIFFUSED	30	2.0	2.8	5	45	5BC-Y/G	
	568	GREEN		30	2.1	2.8	8			

LED Assy. No.	Peak Wave Length λp(nm)	Emitted Color	Lens Appearance	Electro-Optical Data @ 2mA				Viewing Angle 2θ ½ (Deg)	LED P/N	
				If (mA)		Vf (V)				Iv (mcd)
				MAX	TYP	MAX	TYP			
PM5BWLWX.X-CC	430	BLUE	DIFFUSED	7	3.8	4.2	4	45	5BWL	
PM5GDLWX.X-CC	568	GREEN	DIFFUSED	7	2.1	2.6	5	45	5GDL	
PM5YDLWX.X-CC	590	YELLOW	DIFFUSED	7	2.0	2.6	4	45	5YDL	
PM5HDLWX.X-CC	625	RED	DIFFUSED	7	2.0	2.6	5	45	5HDL	

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)
 ±10% ALL VALUES ANGULAR
 X° ±5°

BIVAR[®]
 4 THOMAS, IRVINE, CA, 92618
 TEL: (949) 951-8808 FAX: (949) 951-3974



TITLE:
T-1¼ (5mm) PANEL MOUNT ASSEMBLY

DESIGNED: **Dan Beckman** DATE: **06/28/07**

PART NO: **PM5XXWX.X-CC** REVISION: **G**

CHECKED: **T. Yin** DATE: **06/28/07**

CAGE CODE : **32559** SHEET # **2 OF 2**
 CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.