


OPT- 5DC/48DC/100

Order No.: 2967992

The illustration shows the version OPT-24DC/48DC/100

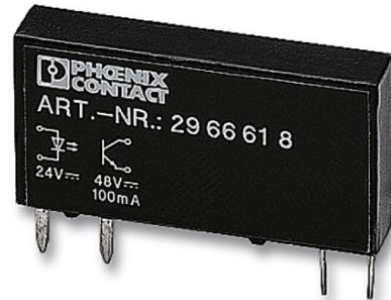

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2967992>

Pluggable miniature optocoupler, input optocoupler, input voltage: 5 V DC

Commercial data	
EAN	4017918820749
Pack	10 Pcs.
Customs tariff	85364190
Weight/Piece	0.0049 KG
Catalog page information	Page 82 (IF-2007)

Product notes

WEEE/RoHS-compliant since:
05/16/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Input data	
Nominal input voltage U_N	5 V DC
Input voltage range in reference to U_N	0.8 ... 1.2
Switching threshold "0" signal, voltage	≤ 0.8 V
Switching threshold "1" signal voltage	≥ 2.5 V

Typical input current at U_N	4 mA
Typical response time	20 μ s (at U_N)
Typical turn-off time	300 μ s (at U_N)
Transmission frequency	300 Hz

Output data

Output nominal voltage range	3 V DC ... 48 V DC
Limiting continuous current	100 mA
Voltage drop at max. limiting continuous current	\leq 1 V
Output circuit	2-conductor floating
Name of protection	Polarity protection
	Surge protection

General data

Length	28 mm
Width	5 mm
Height	15 mm
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Mounting position	Any
Assembly instructions	In rows with zero spacing
Operating mode	100% operating factor
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
Rated surge voltage / insulation	Basic insulation
Pollution degree	2
Surge voltage category	III

Certificates / Approvals




Certification

CUL, GL, GOST, UL


Drawings

Drilling diagram

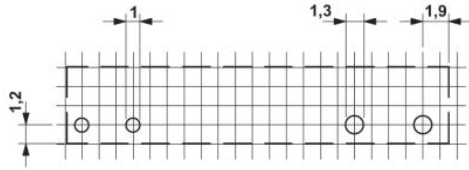


a = pitch division 1.25 mm and 1.27 mm

Diagram

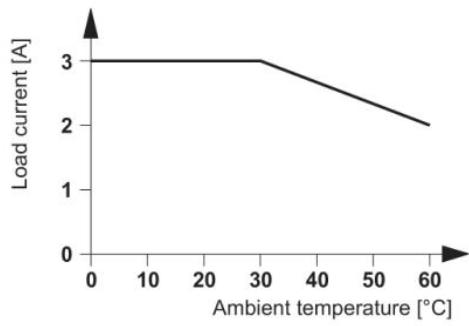

Dimensioned drawing

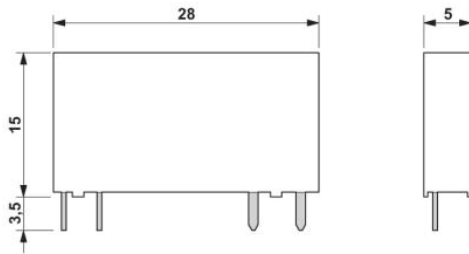

Circuit diagram

