



■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

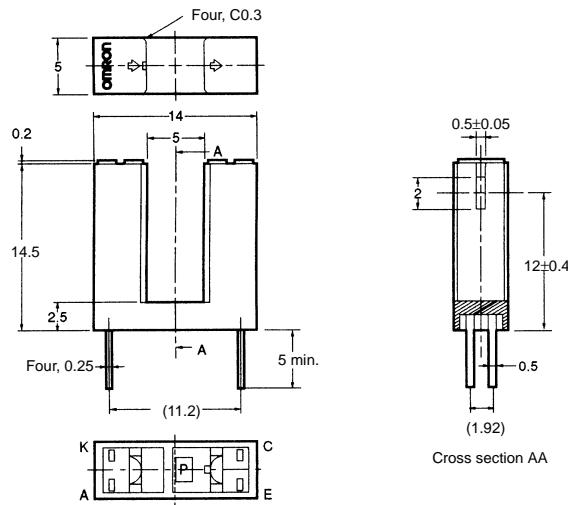

Internal Circuit



Unless otherwise specified, the tolerances are as shown below.

Dimensions	Tolerance
3 mm max.	± 0.3
$3 < \text{mm} \leq 6$	± 0.375
$6 < \text{mm} \leq 10$	± 0.45
$10 < \text{mm} \leq 18$	± 0.55
$18 < \text{mm} \leq 30$	± 0.65

Terminal No.	Name
A	Anode
K	Cathode
C	Collector
E	Emitter

■ Features

- 14.5-mm-tall model with a deep slot.
- PCB mounting type.
- High resolution with a 0.5-mm-wide aperture.

■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rated value
Emitter	Forward current	I _F 50 mA (see note 1)
	Pulse forward current	I _{FP} 1 A (see note 2)
	Reverse voltage	V _R 4 V
Detector	Collector-Emitter voltage	V _{CEO} 30 V
	Emitter-Collector voltage	V _{ECO} ---
	Collector current	I _C 20 mA
	Collector dissipation	P _C 100 mW (see note 1)
Ambient temperature	Operating	T _{opr} -25°C to 85°C
	Storage	T _{stg} -30°C to 100°C
Soldering temperature	T _{sol}	260°C (see note 3)

- Note:
1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.
 2. The pulse width is 10 µs maximum with a frequency of 100 Hz.
 3. Complete soldering within 10 seconds.

■ Electrical and Optical Characteristics (Ta = 25°C)

Item		Symbol	Value	Condition
Emitter	Forward voltage	V _F	1.2 V typ., 1.5 V max.	I _F = 30 mA
	Reverse current	I _R	0.01 µA typ., 10 µA max.	V _R = 4 V
	Peak emission wavelength	λ _P	940 nm typ.	I _F = 20 mA
Detector	Light current	I _L	0.5 mA min., 10 mA max.	I _F = 20 mA, V _{CE} = 10 V
	Dark current	I _D	2 nA typ., 200 nA max.	V _{CE} = 10 V, 0 lx
	Leakage current	I _{LEAK}	---	---
	Collector-Emitter saturated voltage	V _{CE} (sat)	0.1 V typ., 0.4 V max.	I _F = 20 mA, I _L = 0.1 mA
	Peak spectral sensitivity wavelength	λ _P	850 nm typ.	V _{CE} = 10 V
Rising time		tr	4 µs typ.	V _{CC} = 5 V, R _L = 100 Ω, I _L = 5 mA
Falling time		tf	4 µs typ.	V _{CC} = 5 V, R _L = 100 Ω, I _L = 5 mA