


Model 4163 Insulated Triple Banana Jack Polarized

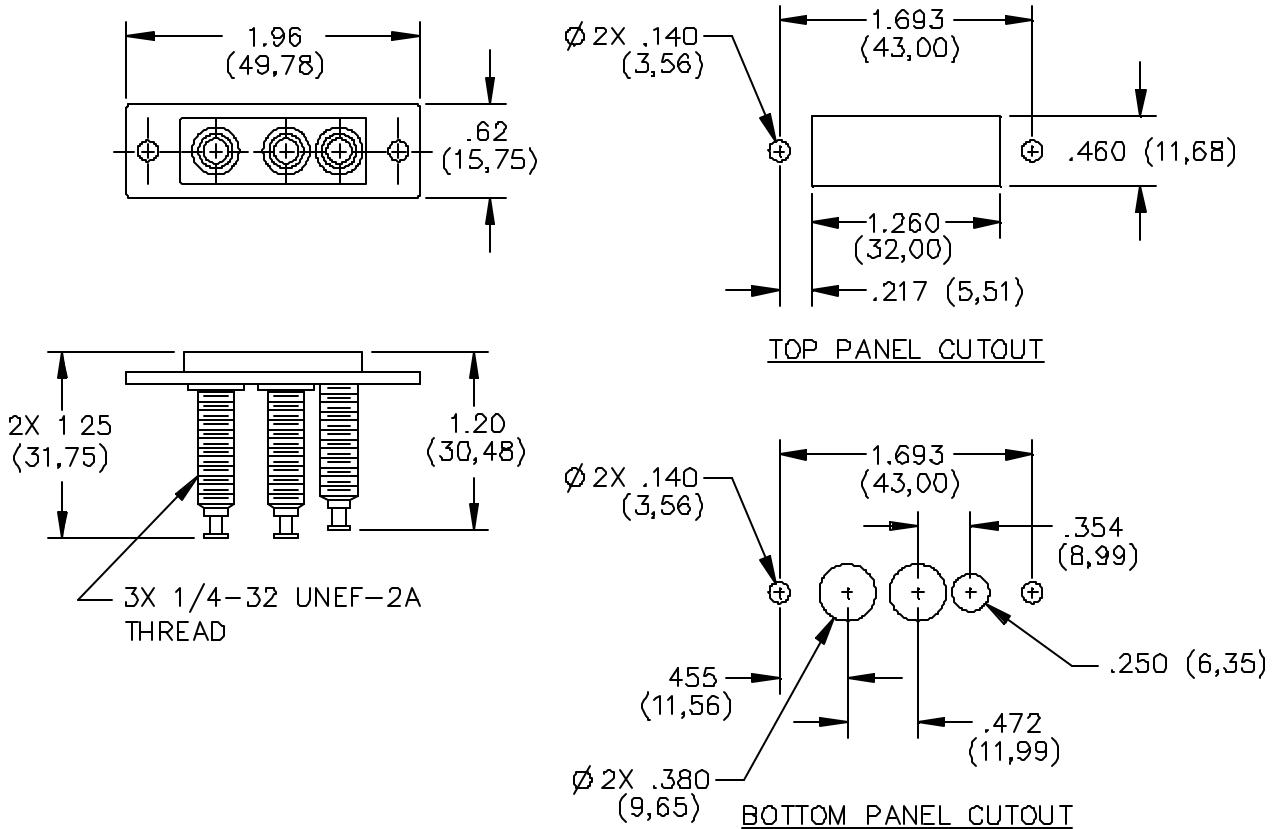

FEATURES:

- Mounts in panels at 17.78 (.70) thickness
- Accepts standard banana plugs up to .80 long.
- Initial connection made with ground receptacle.

MATERIALS:

Banana Jack: Bright Tin Plated Brass

Marking: "Pomona 4163"

Mounting Screws: Steel

Insulation: Polycarbonate

Lockwasher and Hex Nuts: Steel

RATINGS:

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 2500 WVDC Max.

Operating Temperature: +115°C (+239°F) Max.

Current: 15 Amperes

ORDERING INFORMATION: Mode 4163-*

*=Color, -0 Black

Ordering Example: 4163-0 Color is Black.

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm), .xxx = ± 0.005 " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FI\ukeDataSheet\4163_1_01.doc

Sales: 800-490-2361 Fax: 888-403-3360

Technical Assistance: 800-241-2060

PomonaACCESS 90234 (800) 444-6785 or (425) 446-6010

More drawings available at www.pomonaelectronics.com

Page 1 of 1