


Wireless Interface RAD-ISM-900-SET-BD...

Two-way (Point-to-Point) Monitoring
and Control with Expandable I/O Options

Data Sheet 1655B

February 2003

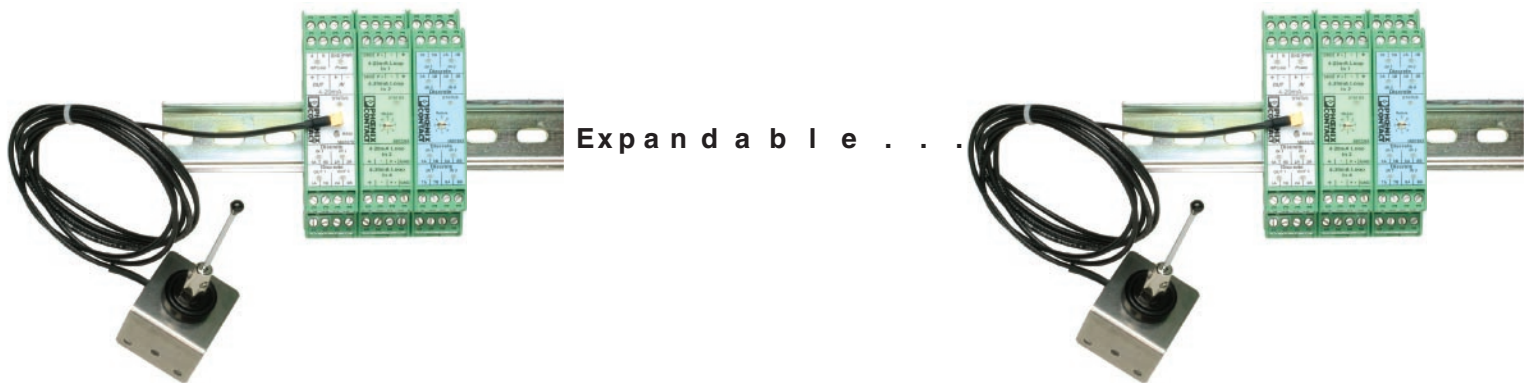

Features

- Modular DIN-rail mount transceiver and I/O
- No programming required
- Class I, Div. 2 approved
- Up to eight (8) expandable I/O modules per transceiver on common power and communications bus with multiple combinations
- Maximum thirty-three (33) analog or sixty-six (66) discrete signals in one direction
- Dry contact LINK diagnostic output

Typical Applications

- SCADA systems
- PLC/RTU extensions
- Pump controls
- Tank level/pressure/temperature monitoring
- Water/wastewater
- Petro-chem

Description

The Phoenix Contact RAD-ISM-900-BD is an integrated radio & I/O module designed for bi-directional interfacing of a 4-20mA current loop and two digital signals in harsh industrial environments. This unique design also allows the user the flexibility to add on multiple channels of I/O to the paired transceivers in combinations. The Frequency Hopping Spread Spectrum (FHSS) utilizes 902-928MHz ISM band to guarantee a license free, interference free link between remote devices and the control room. The design is ideal for moving numerous signals within high interference environments without costly cable and conduit runs.

Wireless Interface RAD-ISM-900-BD...

Two-way (Point-to-Point) Monitoring and Control with Expandable I/O Options

Engineering Specifications

Range	600 to 1000 feet (180 to 305 m) in-plant [obstructed]; 4 to 5 miles (6 to 8 km) line-of-sight with Omni antenna; 20+ miles (32+ km) line-of-sight with Yagi antenna
Inputs	One (1) 4-20 mA analog (16-bit resolution; 125 ohms impedance) Two (2) discrete (5 to 36 V dc)
Outputs	One (1) 4-20 mA analog (16-bit resolution; short-circuit protected) Two (2) discrete (dry contact, Normally Open (NO), contact rating: 250 V ac/5 A)
I/O Expansion	Eight (8) analog and/or discrete I/O modules per transceiver station
Accuracy	Current loop: 0.2% of full-scale @ 77°F (25°C)
Repeatability	Current loop: 0.02%
Wiring Connections	12-24 AWG screw-type terminals; removable terminal blocks
Mounting	DIN-rail mount
Power (Input voltage)	9 to 30 V dc
Power Consumption	75 mA at 24 V (average) 200 mA at 24 V (peak)
Reverse Polarity Protection	Yes
Surge Protection	Yes
Temperature Rating	-40°F to 158°F (-40°C to 70°C)
Humidity	20% to 90% (non-condensing)
Dimensions	4.5" x 3.9" x 0.9" (114 mm x 99 mm x 22.5 mm)
LED Indicators	External (Power, RF Link, I/O Status)
Unit ID	Factory configured (unique); 16-bit coding of each transceiver pair allows multiple units to be used in the same area (easy configuration of spares with HopKey)
Frequency	902 to 928 MHz - license-free ISM band
Transmit Power	1 Watt (30dBm)
Antenna Connector	MCX (female)
Environmental Rating	NEMA 1 (equivalent to IP30)
Approvals	USA - FCC Part 15.247 Canada - ISC RSS 210
Certifications	CSA/C & US UL - Class I, Div. 2 (Groups A, B, C ,D - pending)

Specifications subject to change without notice

RAD-ISM-900-SET-BD Components

The RAD-ISM-900-SET-BD base system includes the following items:

- Two RAD-ISM-900-BD transceiver modules
- Two 3" ¼ wave whip antennas, each with 6' of RG174 cable. The antennas can be mounted on an "L" bracket (also supplied) inside or outside a cabinet.

Ordering Information

<u>Part Description</u>	<u>Part Number</u>
RAD-ISM-900-SET-BD-ANT Transceiver set	2867270
RAD-ISM-900-BD	2867092
spare transceiver (can be used as repeater or in simplex mode for expansion)	

Expandable I/O options

<u>Part Description</u>	<u>Part Number</u>
RAD-IN-4A-I	2867115
RAD-OUT-4A-I	2867128
RAD-IN-8D	2867144
RAD-OUT-8D-REL	2867157