


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 (C) COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	-	P	LR	DESCRIPTION	DATE	DWN	APVD
		E2		REDRAWN W/CHANGE	ECR-07-024571	24OCT07	DM YF

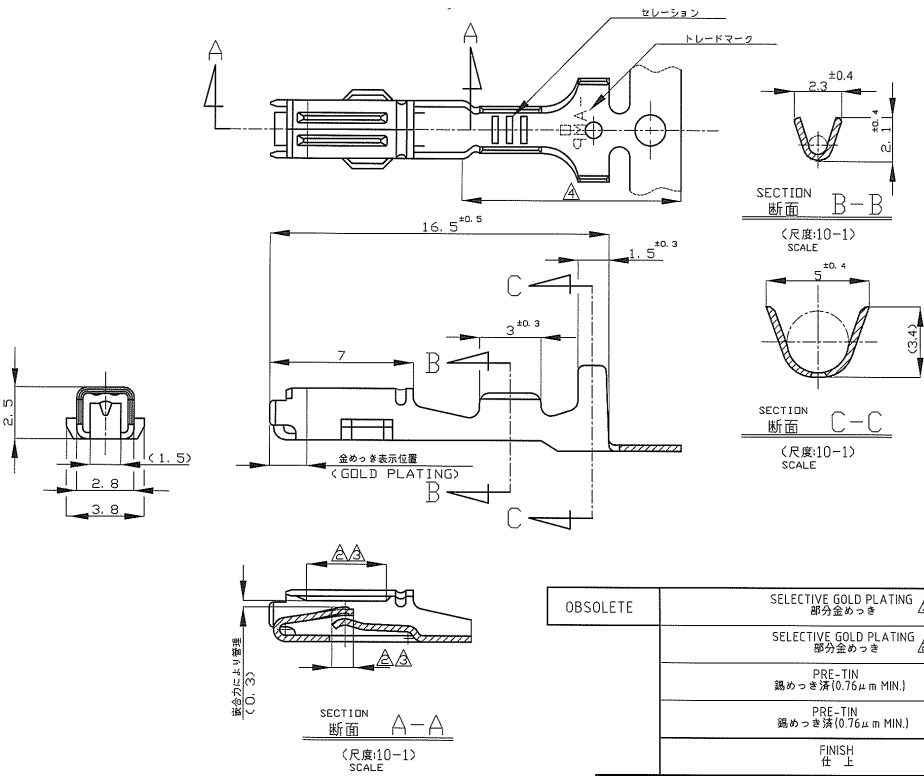

注
 1. 適合相手端子型番: 171631
 △部分金めっき 0.38 μm 最小
 △部分金めっき 1.27 μm 最小
 △部分半田めっき 2.0 μm 最小
 5. 一般公差: 10以下±0.2 10以上30以下±0.25 30以上100以下±0.3 角度±3°

NOTE ;
 1. TAB CONTACT ; 171631
 △ SELECTIVE GOLD PLATING 0.38 μm MIN.
 △ SELECTIVE GOLD 1.27 μm MIN.
 △ SELECTIVE TIN-LEAD PLATING 2.0 μm MIN.
 5. TOLERANCES UNLESS OTHERWISE SPECIFIED.
 10MAX: ±0.2 10-30: ±0.25 30-100: ±0.3 ANGLES: ±3°

OBSELETE	SELECTIVE GOLD PLATING 部分金めっき	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-6
	SELECTIVE GOLD PLATING 部分金めっき	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-5
	PRE-TIN 錫めっき済(0.76 μm MIN.)	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-2
	PRE-TIN 錫めっき済(0.76 μm MIN.)	BRASS t = 0.3 黄銅 板厚 0.3	171630-1
	FINISH 仕上	MATERIAL 材 結	PART NUMBER 型 番

適合電線断面積(WIRE RENGE)	被覆外径(INSULATION DIA)
AVS 0.2-0.5mm ² [AWG24-20]	1.4-2.4mm φ

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.MATSUURA 24OCT07	Tyco Electronics Corporation Kawasaki, Japan	
DIMENSIONS: 単位: 特 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	CHK T.KOHNO 24OCT07	NAME Y.FUJIWARA	RESTRICTED TO
0 PLC ±	1 PLC ±	APVD Y.FUJIWARA 24OCT07	PRODUCT SPEC 製品規格 108-5262	SIZE A3
2 PLC ±	3 PLC ±	APPLICATION SPEC 取付指示規格 114-5082	WEIGHT 0.35g	CAGE CODE 00779
4 PLC ±	ANGLES ±	FINISH 仕上	CUSTOMER DRAWING	DRAWING NO 171630
MATERIAL 材料 SEE TABLE	FINISH 仕上 SEE TABLE	SCALE 尺 5:1		SHEET 1 of 1
		REV E2		