



## BUF420AW

### HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- STMicroelectronics PREFERRED SALESTYPE
- HIGH VOLTAGE CAPABILITY
- VERY HIGH SWITCHING SPEED
- MINIMUM LOT-TO-LOT SPREAD FOR RELIABLE OPERATION
- LOW BASE-DRIVE REQUIREMENTS



#### APPLICATIONS:

- SWITCH MODE POWER SUPPLIES
- MOTOR CONTROL

#### DESCRIPTION

The BUF420AW is manufactured using High Voltage Multi Epitaxial Planar technology for high switching speeds and high voltage capacity. It uses a Cellular Emitter structure with planar edge termination to enhance switching speeds while maintaining a wide RBSOA.

The BUF series is designed for use in high-frequency power supplies and motor control applications.

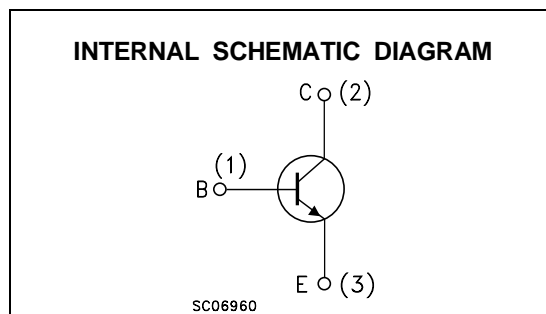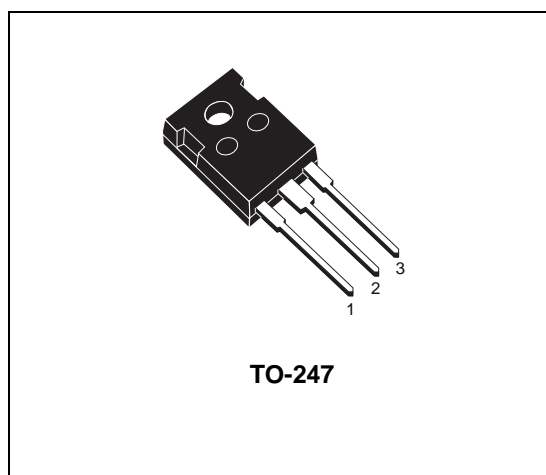

#### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_{CEV}$	Collector-Emitter Voltage ( $V_{BE} = -1.5V$ )	1000	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	450	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	7	V
$I_C$	Collector Current	30	A
$I_{CM}$	Collector Peak Current ( $t_p < 5$ ms)	60	A
$I_B$	Base Current	6	A
$I_{BM}$	Base Peak Current ( $t_p < 5$ ms)	9	A
$P_{tot}$	Total Dissipation at $T_c = 25$ °C	200	W
$T_{stg}$	Storage Temperature	-65 to 150	°C
$T_j$	Max. Operating Junction Temperature	150	°C

## BUF420AW

### THERMAL DATA

$R_{thj-case}$	Thermal Resistance Junction-Case	Max	0.63	$^{\circ}\text{C}/\text{W}$
----------------	----------------------------------	-----	------	-----------------------------

### ELECTRICAL CHARACTERISTICS ( $T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CER}$	Collector Cut-off Current ( $R_{BE} = 5 \Omega$ )	$V_{CE} = 1000 \text{ V}$ $V_{CE} = 1000 \text{ V}$ $T_C = 100^{\circ}\text{C}$			0.2 1	mA mA
$I_{CEV}$	Collector Cut-off Current ( $V_{BE} = -1.5\text{V}$ )	$V_{CE} = 1000 \text{ V}$ $V_{CE} = 1000 \text{ V}$ $T_C = 100^{\circ}\text{C}$			0.2 1	mA mA
$I_{EBO}$	Emitter Cut-off Current ( $I_C = 0$ )	$V_{EB} = 5 \text{ V}$			1	mA
$V_{CEO(sus)*}$	Collector-Emitter Sustaining Voltage ( $I_B = 0$ )	$I_C = 200 \text{ mA}$ $L = 25 \text{ mH}$	450			V
$V_{EBO}$	Emitter Base Voltage ( $I_C = 0$ )	$I_E = 50 \text{ mA}$	7			V
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C = 10 \text{ A}$ $I_B = 1 \text{ A}$ $I_C = 10 \text{ A}$ $I_B = 1 \text{ A}$ $T_C = 100^{\circ}\text{C}$ $I_C = 20 \text{ A}$ $I_B = 4 \text{ A}$ $I_C = 20 \text{ A}$ $I_B = 4 \text{ A}$ $T_C = 100^{\circ}\text{C}$		0.8 0.5	2.8 2	V V V V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C = 10 \text{ A}$ $I_B = 1 \text{ A}$ $I_C = 10 \text{ A}$ $I_B = 1 \text{ A}$ $T_C = 100^{\circ}\text{C}$ $I_C = 20 \text{ A}$ $I_B = 4 \text{ A}$ $I_C = 20 \text{ A}$ $I_B = 4 \text{ A}$ $T_C = 100^{\circ}\text{C}$		0.9 1.1	1.5 1.5	V V V V
$di_C/dt$	Rate of rise on-state Collector Current	$V_{CC} = 300 \text{ V}$ $R_C = 0$ $t_p = 3 \mu\text{s}$ $I_{B1} = 1.5 \text{ A}$ $T_C = 25^{\circ}\text{C}$ $I_{B1} = 1.5 \text{ A}$ $T_C = 100^{\circ}\text{C}$ $I_{B1} = 6 \text{ A}$ $T_C = 100^{\circ}\text{C}$	70 150	100		A/ $\mu\text{s}$ A/ $\mu\text{s}$ A/ $\mu\text{s}$
$V_{CE(3\mu\text{s})}$	Collector-Emitter Dynamic Voltage	$V_{CC} = 300 \text{ V}$ $R_C = 60 \Omega$ $I_{B1} = 1.5 \text{ A}$ $T_C = 25^{\circ}\text{C}$ $I_{B1} = 1.5 \text{ A}$ $T_C = 100^{\circ}\text{C}$		2.1	8	V V
$V_{CE(5\mu\text{s})}$	Collector-Emitter Dynamic Voltage	$V_{CC} = 300 \text{ V}$ $R_C = 60 \Omega$ $I_{B1} = 1.5 \text{ A}$ $T_C = 25^{\circ}\text{C}$ $I_{B1} = 1.5 \text{ A}$ $T_C = 100^{\circ}\text{C}$		1.1	4	V V
$t_s$ $t_f$ $t_c$	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	$I_C = 10 \text{ A}$ $V_{CC} = 50 \text{ V}$ $V_{BB} = -5 \text{ V}$ $R_{BB} = 0.6 \Omega$ $V_{clamp} = 400 \text{ V}$ $I_{B1} = 1 \text{ A}$ $L = 0.25 \text{ mH}$		1 0.05 0.08		$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$t_s$ $t_f$ $t_c$	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	$I_C = 10 \text{ A}$ $V_{CC} = 50 \text{ V}$ $V_{BB} = -5 \text{ V}$ $R_{BB} = 0.6 \Omega$ $V_{clamp} = 400 \text{ V}$ $I_{B1} = 1 \text{ A}$ $L = 0.25 \text{ mH}$ $T_C = 100^{\circ}\text{C}$			2 0.1 0.18	$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$V_{CEW}$	Maximum Collector Emitter Voltage without Snubber	$I_C = 10 \text{ A}$ $V_{CC} = 50 \text{ V}$ $V_{BB} = -5 \text{ V}$ $R_{BB} = 0.6 \Omega$ $I_{B1} = 1 \text{ A}$ $L = 0.25 \text{ mH}$ $T_C = 125^{\circ}\text{C}$	500			V
$t_s$ $t_f$ $t_c$	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	$I_C = 10 \text{ A}$ $V_{CC} = 50 \text{ V}$ $V_{BB} = 0$ $R_{BB} = 0.15 \Omega$ $V_{clamp} = 400 \text{ V}$ $I_{B1} = 1 \text{ A}$ $L = 0.25 \text{ mH}$		1.5 0.04 0.07		$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$

**ELECTRICAL CHARACTERISTICS** (continued)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit	
$t_s$ $t_f$ $t_c$	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	$I_C = 10\text{ A}$ $V_{BB} = 0$ $V_{clamp} = 400\text{ V}$ $L = 0.25\text{ mH}$	$V_{CC} = 50\text{ V}$ $R_{BB} = 0.15\ \Omega$ $I_{B1} = 1\text{ A}$ $T_C = 100^\circ\text{C}$			3 0.15 0.25	$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$V_{CEW}$	Maximum Collector Emitter Voltage without Snubber	$I_C = 10\text{ A}$ $V_{BB} = 0$ $I_{B1} = 1\text{ A}$ $T_C = 125^\circ\text{C}$	$V_{CC} = 50\text{ V}$ $R_{BB} = 0.15\ \Omega$ $L = 0.25\text{ mH}$	500			V
$t_s$ $t_f$ $t_c$	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	$I_C = 20\text{ A}$ $V_{BB} = -5\text{ V}$ $V_{clamp} = 400\text{ V}$ $L = 0.12\text{ mH}$	$V_{CC} = 50\text{ V}$ $R_{BB} = 0.6\ \Omega$ $I_{B1} = 4\text{ A}$		2.2 0.06 0.12		$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$t_s$ $t_f$ $t_c$	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	$I_C = 20\text{ A}$ $V_{BB} = -5\text{ V}$ $V_{clamp} = 400\text{ V}$ $L = 0.12\text{ mH}$	$V_{CC} = 50\text{ V}$ $R_{BB} = 0.6\ \Omega$ $I_{B1} = 4\text{ A}$ $T_C = 125^\circ\text{C}$			3.5 0.12 0.3	$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$V_{CEW}$	Maximum Collector Emitter Voltage without Snubber	$I_{Coff} = 30\text{ A}$ $V_{BB} = -5\text{ V}$ $L = 0.12\text{ mH}$ $T_C = 125^\circ\text{C}$	$V_{CC} = 50\text{ V}$ $R_{BB} = 0.6\ \Omega$ $I_{B1} = 6\text{ A}$	400			V

**TO-247 MECHANICAL DATA**

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.7		5.3	0.185		0.209
D	2.2		2.6	0.087		0.102
E	0.4		0.8	0.016		0.031
F	1		1.4	0.039		0.055
F3	2		2.4	0.079		0.094
F4	3		3.4	0.118		0.134
G		10.9			0.429	
H	15.3		15.9	0.602		0.626
L	19.7		20.3	0.776		0.779
L3	14.2		14.8	0.559		0.582
L4		34.6			1.362	
L5		5.5			0.217	
M	2		3	0.079		0.118

