

## POWER SCHOTTKY RECTIFIER

### MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	3 A
$V_{RRM}$	60 V
$T_j$ (max)	150°C
$V_F$ (max)	0.61 V


### FEATURES AND BENEFITS

- NEGLIGIBLE SWITCHING LOSSES
- LOW THERMAL RESISTANCE
- AVALANCHE CAPABILITY SPECIFIED

### DESCRIPTION

Axial and Surface Mount Power Schottky rectifier suited for Switch Mode Power Supplies and high frequency DC to DC converters. Packaged in DO-201AD, DO-15 and SMB, this device is intended for use in low voltage, high frequency inverters and small battery chargers.

For applications where there are space constraints, e.g Telecom battery charger.

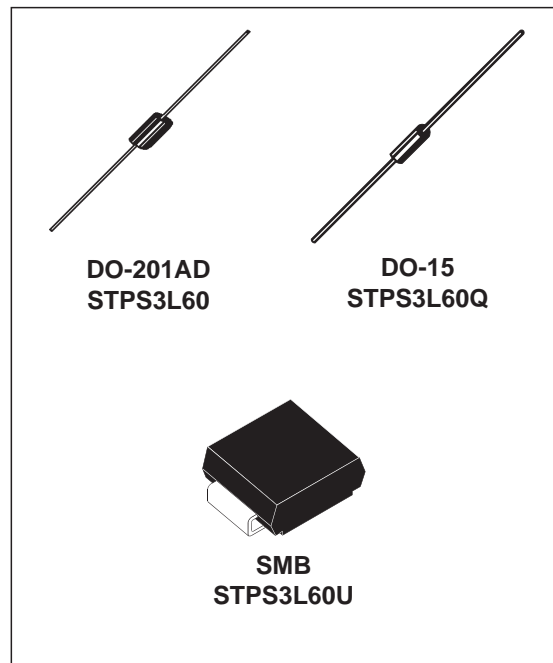

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit	
$V_{RRM}$	Repetitive peak reverse voltage	60	V	
$I_{F(RMS)}$	RMS forward current	10	A	
$I_{F(AV)}$	Average forward current	$T_L = 105^\circ\text{C}$ $\delta = 0.5$ (DO-201AD, SMB)	3	A
		$T_L = 75^\circ\text{C}$ $\delta = 0.5$ (DO-15)		
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10$ ms Sinusoidal	100	A
$P_{ARM}$	Repetitive peak avalanche power	$t_p = 1$ $\mu$ s $T_j = 25^\circ\text{C}$	2000	W
$T_{stg}$	Storage temperature range		- 65 to + 150	°C
$T_j$	Maximum operating junction temperature *		150	°C
dV/dt	Critical rate of rise of reverse voltage		10000	V/ $\mu$ s

\* :  $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th}(j-a)}$  thermal runaway condition for a diode on its own heatsink

## STPS3L60/Q/U

### THERMAL RESISTANCES

Symbol	Parameter		Value	Unit	
$R_{th(j-l)}$	Junction to leads	Lead length = 10 mm	DO-201AD	20	°C/W
			SMB	20	
			DO-15	35	

### STATIC ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
$I_R^*$	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			150	$\mu\text{A}$
		$T_j = 100^\circ\text{C}$			4	15	$\text{mA}$
		$T_j = 125^\circ\text{C}$			14	30	
$V_F^*$	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 3\text{ A}$			0.62	V
		$T_j = 100^\circ\text{C}$			0.53	0.61	
		$T_j = 125^\circ\text{C}$			0.51	0.59	
		$T_j = 25^\circ\text{C}$	$I_F = 6\text{ A}$			0.79	
		$T_j = 100^\circ\text{C}$			0.62	0.71	
		$T_j = 125^\circ\text{C}$			0.6	0.69	

Pulse test : \*  $t_p = 380\ \mu\text{s}$ ,  $\delta < 2\%$


To evaluate the maximum conduction losses use the following equation:

$$P = 0.44 \times I_{F(AV)} + 0.05 \times I_{F(RMS)}^2$$


**Fig. 1:** Average forward power dissipation versus average forward current.

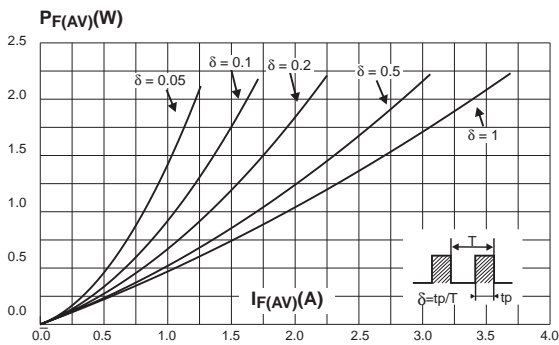


**Fig. 2-1:** Average forward current versus ambient temperature ( $\delta = 0.5$ ) (DO-201AD, SMB).

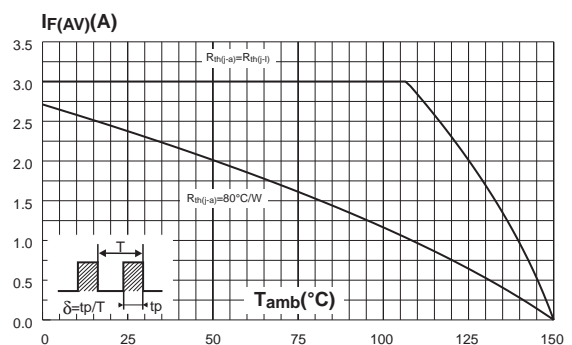

**PACKAGE MECHANICAL DATA**  
DO-15 plastic

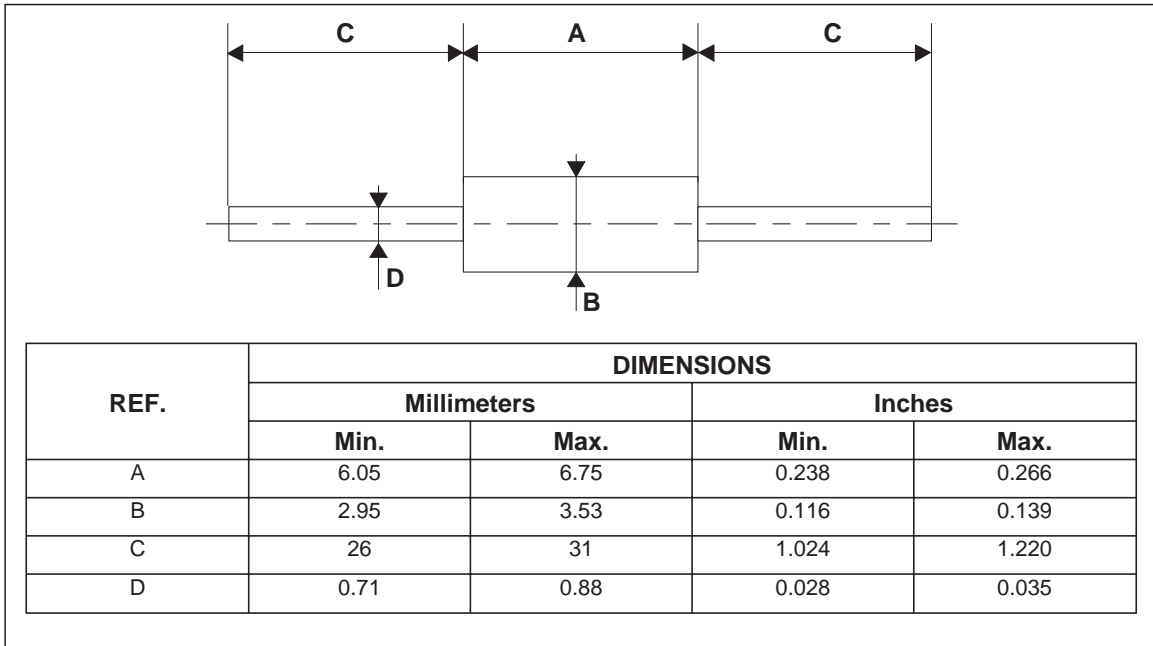

**PACKAGE MECHANICAL DATA**  
DO-201AD plastic

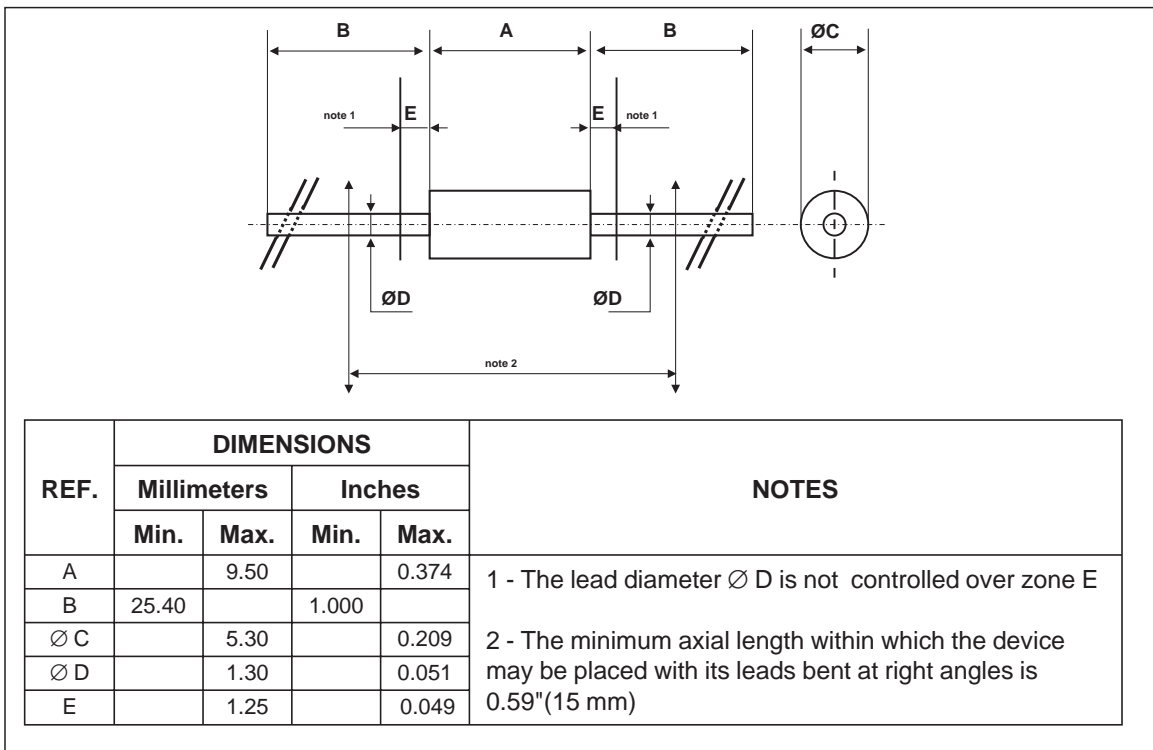


## STPS3L60/Q/U

### PACKAGE MECHANICAL DATA SMB (JEDEC DO-214AA)

	DIMENSIONS				
	REF.	Millimeters		Inches	
		Min.	Max.	Min.	Max.
	A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008	
b	1.95	2.20	0.077	0.087	
c	0.15	0.41	0.006	0.016	
E	5.10	5.60	0.201	0.220	
E1	4.05	4.60	0.159	0.181	
D	3.30	3.95	0.130	0.156	
L	0.75	1.60	0.030	0.063	

### FOOT PRINT DIMENSIONS (in millimeters)

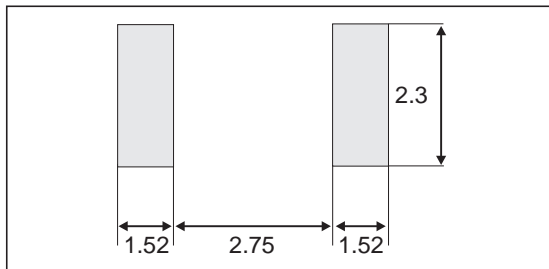

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS3L60	STPS3L60	DO-201AD	1.12g	600	Ammopack
STPS3L60RL	STPS3L60	DO-201AD	1.12g	1900	Tape & Reel
STPS3L60Q	STPS3L60	DO-15	0.4 g	1000	Ammopack
STPS3L60QRL	STPS3L60	DO-15	0.4 g	6000	Tape & Reel
STPS3L60U	G36	SMB	0.107 g	2500	Tape & Reel

- White band indicates cathode
- Epoxy meets UL94,V0