



XPX100DT



Actual product appearance may vary.

Pressure Sensors: Measurement Type: Differential, Gage, Vacuum Gage; Signal Conditioning: Unamplified; Pressure Range: #177 100.0 psi; Port Style: Barbed

Features

- Low Cost, Small Size
- Temperature Compensated
- Zero and Span Calibrated
- MilliVolt Output
- Gage, Differential, and Absolute Pressure
- Constant Voltage Excitation
- High Impedance - Low Current

Potential Applications

- Medical Applications
- Applications Requiring Small Size
- Applications Requiring Vacuum, Positive Pressure or Both

Description

The XPXL/XPX and XPCL/XPC Series sensors integrate silicon micromachined sensing technology, temperature compensation, and calibration in a complete family of low cost packages. This series offers the most cost-effective solution for design requirements. These piezoresistive pressure sensors use micromachined silicon chips mounted on a ceramic and protected with a plastic cap. Several tube arrangements with nylon housings are available for various pressure applications. On devices of 5 psi and above, the topside of the chip is protected against humidity by a Silgel coating. While the sensors are designed for use with noncorrosive, nonionic pressure media, they accommodate many gases that are used in medical applications.

Product Specifications	
Measurement Type	Differential, Vacuum Gage, Gage
Signal Conditioning	Unamplified
Pressure Range	± 100 psi
Maximum Overpressure	250 psi
Supply Voltage	3.0 Vdc min., 12.0 Vdc typ., 16.0 Vdc max.
Compensated	No
Output Calibration	No
Termination	PCB
Port Style	Barbed
Package Style	Honeywell DI-XPX
Typical Sensitivity	7.08 mV/psi
Full Scale Span	295 mV typ.

Null Offset	0 mV typ.
Null Shift over Temperature	2500 ppm/°C
Span Shift Over Temperature	-1800 ppm/°C
Linearity, Hysteresis Error	± 1.0 % max.Span
Input Resistance	2600 ppm/°C
Output Resistance	-1800 ppm/°C
Operating Temperature Range	-25 °C to 85 °C [-13 °F to 185 °F]
Storage Temperature Range	-40 °C to 125 °C [-40 °F to 257 °F]
Media Compatibility	Port 1: Dry gases only. Media must be compatible with epoxy-based adhesive. Port 2: Wetted materials. Media must be compatible with nylon housing, epoxy adhesive and silicon.
UNSPSC Code	411121
UNSPSC Commodity	411121 Transducers
Availability	Global
Series Name	XPX




SERIES
DESIGNATES PRESSURE
L - LOW PRESSURE (1 IN H₂O)
NO DESIGNATION (PSI)
PRESSURE RANGE
0.3, 10, 15, 30, 60, 100, 150 PSI

ACCURACY GRADE
C - COMMERCIAL GRADE
NO DESIGNATION
COMMERCIAL GRADE

PORT OPTION
F - AXIAL
R - RADIAL
T - OFFSET AXIAL


PRESSURE REFERENCE
G - GAGE
D - DIFFERENTIAL

CATALOG LISTINGS
 XPXL0406C
 XPXL1001
 XPXL010
 XPXL100T
 XPXL50FS
 XPXL100D
 XPXL300T
 XPXL100D
 XPXL100D
 XPXL100D
 XPXL100D
 XPXL100D
 XPXL100D
 XPXL100D
 XPXL100D

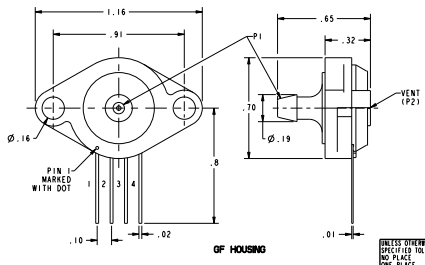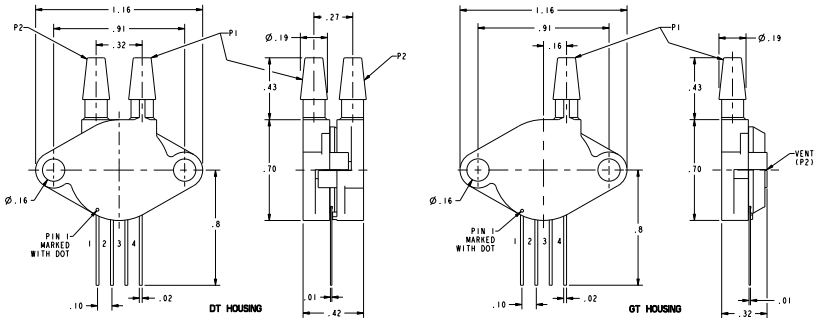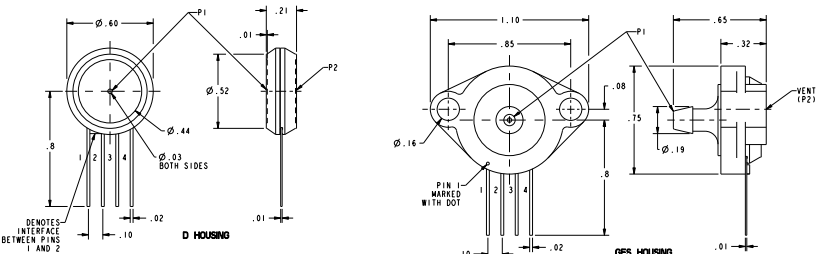

XPX/XPXL G AND D STYLE (GAGE/DIFFERENTIAL)	PERFORMANCE AT 25°C AND 5±0.01 Vdc (UNLESS OTHERWISE STATED)			UNITS	FULL SCALE PRESSURE PSI	PROOF PRESSURE PSI	BURST PRESSURE PSI
	MIN	NOM	MAX				
OFFSET (FOR ALL LISTINGS)	-50	0	50	mV			
4 IN H ₂ O SPAN (P1>P2) (LM LISTING)	50	40	80	mV	4 IN H ₂ O	3	5
10 IN H ₂ O SPAN (P1>P2) (L10 LISTING)	45	76.5	112	mV	10 IN H ₂ O	3	5
0.3 PSI SPAN (P1>P2)	37	45	93	mV	0.3	3	5
1 PSI SPAN (P1>P2)	40	75	110	mV	1	3	5
5 PSI SPAN (P1>P2)	112	168.5	225	mV	5	15	25
15 PSI SPAN (P1>P2)	168	253	338	mV	15	45	75
30 PSI SPAN (P1>P2)	168	253	338	mV	30	90	150
60 PSI SPAN (P1>P2)	189	263.5	338	mV	60	180	300
100 PSI SPAN (P1>P2)	210	295	380	mV	100	250	400
150 PSI SPAN (P1>P2)	187	262.5	338	mV	150	250	400
TEMPERATURE CHANGE BRIDGE RESISTANCE	---	2600	---	ppm/°C			
TEMPERATURE CHANGE SPAN	---	-1800	---	ppm/°C			
COMBINED LINEARITY AND HYSTERESIS (Δ)	---	---	1	% SPAN			

GENERAL OPERATING CHARACTERISTICS	ALL PRESSURES AND GRADES			UNITS
	MIN	NOM	MAX	
EXCITATION VOLTAGE	---	5	12	Vdc
INPUT RESISTANCE	---	3000	---	OHMS
OUTPUT RESISTANCE	---	3000	---	OHMS
OPERATING TEMPERATURE	-25	25	85	°C
STORAGE TEMPERATURE	-40	---	125	°C



- NOTES**
- 1 - SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN THE OUTPUT AT FULL SCALE PRESSURE AND THE OFFSET OUTPUT
 - 2 - LINEARITY IS MEASURED AT 1/2 FULL SCALE PRESSURE USING BEST STRAIGHT LINE FIT
 - 3 - THE OUTPUT OF THE SENSOR IS PROPORTIONAL, RATIO-METRIC, TO THE EXCITATION VOLTAGE.
 - ALL SPECIFICATIONS WILL NORMALLY BE CHANGED BY THE RATIO OF V_{EXCITATION}/5.0 Vdc
 - 4 - LIMIT SOLDERING TO 315°C FOR LESS THAN 10 SECONDS
 - 5 - PIN 1 IS IDENTIFIED BY THE DOT ON THE HOUSING OR BY THE BRIDGING TAB BETWEEN TERMINALS 1 AND 2
 - 6 - APPLY PRESSURE TO PORT INDICATED ON THE DRAWINGS SHOWN
 - 7 - SENSORS ARE OPERATIONAL OVER VACUUM PRESSURE RANGE
 - 8 - P1 INPUT MEDIA RESTRICTED TO DRY GASES ONLY
 - 9 - P2 INPUT MEDIA RESTRICTED TO MEDIA COMPATIBLE WITH NYLON, EPOXY ADHESIVE AND SILICON

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:	DECIMAL	FRACTION	DRAWN	TSM	25MAR01
NO PLACE	± 0.04	± 1	CHECK	SAV	25MAR01
ONE PLACE	± 0.05	± 0.15	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED.		
TWO PLACE	± 0.005	± 0.005			
THREE PLACE	± 0.0005	± 0.0005			
FOUR PLACE	± 0.00005	± 0.00005			
THIRD ANGLE PROJECTION					
HONEYWELL			TITLE		
PRESSURE SENSOR			SIZE		
D			DWG TYPE		
M			DRAWING NAME		
3:1			XPX GAGE DIF SERIES CHART 1		
SCALE			REV		
P/C 30			5		
ASME Y14.5M-1994			1		
WEIGHT			OF		
			1		