



**Fuseholder  
open design  
Type FMS**

through hole mounting



Suitable sub-miniature fuse-links  
Types MSF 250/MST 250/  
MSTU 250/MXT 250  
see pages 68, 69, 70, 71

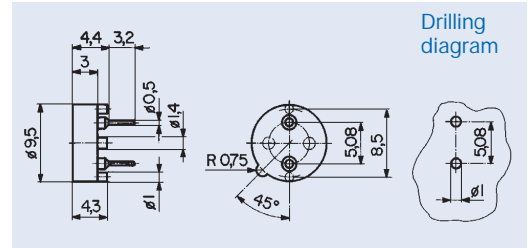

**Technical data**

- Rated voltage: 250 V
- Rated current: 6,3 A
- Admissible ambient temperature: -40 °C to +85 °C
- Dielectric strength (AC / 1 Min): 2,5 kV between the terminals
- Insulation resistance (500 V DC/1 Min): > 10<sup>9</sup> MΩ
- Contact resistance: 7 mΩ
- Solderability: 235 °C/2 s, according to IEC 60068-2-20, test Ta, method 1
- Resistance to soldering heat: 350 °C/ 5 s, according to IEC 60068-2-20, test Tb, method 1B
- Materials: Socket thermoplastic, flammability class UL 94V-0
- Terminals: copper alloy  
Inside contacts gold-plated, solder pins tin-plated

Order No.

0031.7601

Fuseholder