

Cooper Bussmann

- Homepage
- About Cooper Bussmann
- Contact Us
- Privacy
- Legal
- Cooper Bussmann® Brand
- Site Map



BBS-1

Fast-Acting Supplementary Fuses, 13/32 x 1-3/8 Inches

Product Information

Product Type:	Fuse
Product Family:	Electrical Power

Recommended Products

Rec. Fuse Block:	BM603 Series
Rec. Inline Fuse Holder:	HPS-L
Rec. Panel-mount Fuse Holder:	HEH Series
Rec. Fuse Clips:	5960 Series

Physical Properties

Dimensions:	1.38in. (L) x 0.41in. (W) x 0in. (H)
-------------	--------------------------------------

Certifications

- [UL Listed](#)
- [CSA Certified](#)

Electrical Properties


Maximum AC Voltage:	250
Amperage Rating:	1
AC Interrupting Ratings:	<ul style="list-style-type: none"> • 10000 at 250V
Fast Acting:	Yes

Fast-Acting Ferrule Fuses

13/32" x 1-3/8"



Dimensional Data

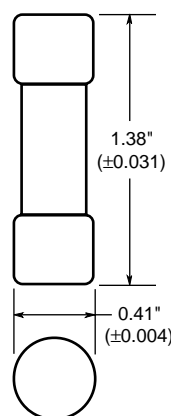

Catalog Symbol: BBS

Fast-Acting
1/10 TO 30A

Interrupting Rating: 10 KA

UL Listed, STD. 248-14

0-5A/600Vac OR LESS, 6-10A/250Vac
(GUIDE #JDYX, FILE #E19180)


CSA CERTIFIED, C22.2 NO. 248.14

0-5A/600V, 6-10A/250Vac
(CLASS #1422-01, FILE #53787)

Electrical Ratings (Catalog Symbol and Amperes)

600Vac		250Vac	48Vac
BBS-1/10	BBS-1	BBS-6	BBS-12
BBS-2/10	BBS-1-1/2	BBS-7	BBS-15
BBS-1/4	BBS-1-6/10	BBS-8	BBS-20
BBS-4/10	BBS-1-8/10	BBS-10	BBS-25
BBS-1/2	BBS-2	—	BBS-30
BBS-6/10	BBS-3	—	—
BBS-3/4	BBS-4	—	—
BBS-8/10	BBS-5	—	—

CE




Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses

See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

Time-Current Characteristic Curves—Average Melt

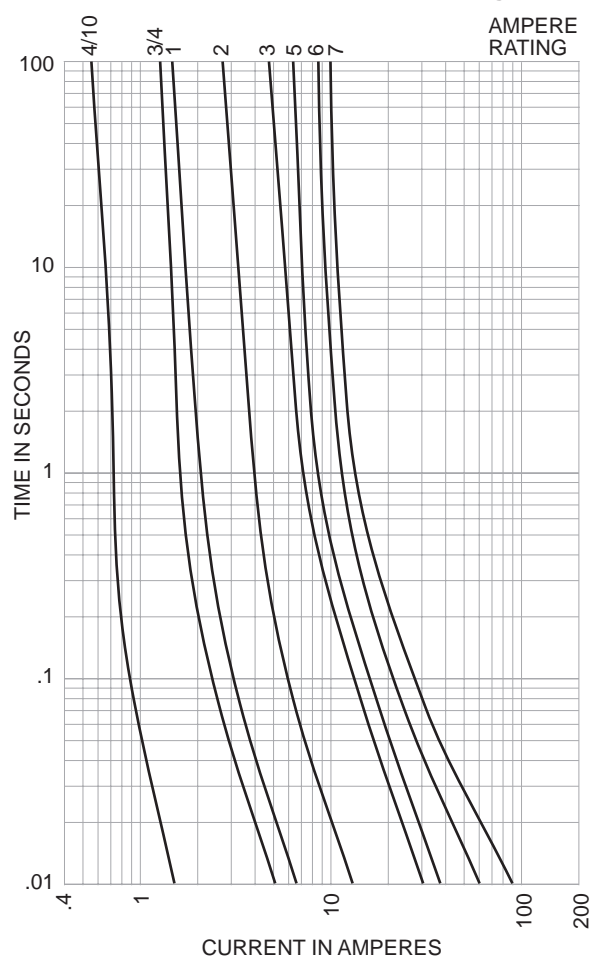

- For control circuits, gaseous vapor fixture, HID ballasts; electronic circuits and hand-held meters.
- Fibre Tube.
- Nickel Plated Brass Endcaps.