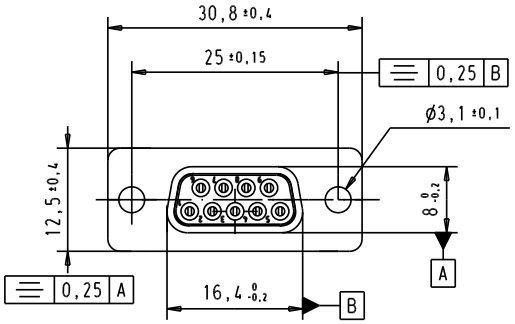



Solder bucket for AWG 20

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	1000pf ±20%
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

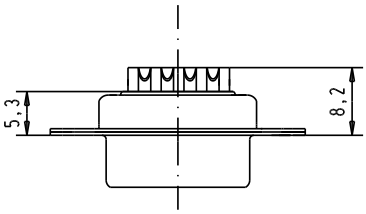

Mod.	Dat.	Name
32802	11/07/05	JMDR
31894	29/04/04	AF
31058	8-JUL-02	CV

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.		
Stand.		

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, female, straight
9 Poles, with turned solder bucket, fixing hole

Ma?Mstab/Scale 1.5:1

TB 09641117230

Sub.

Blatt/Page 1/1

Downloaded from Elcodis.com electronic components distributor