



DIMENSIONS

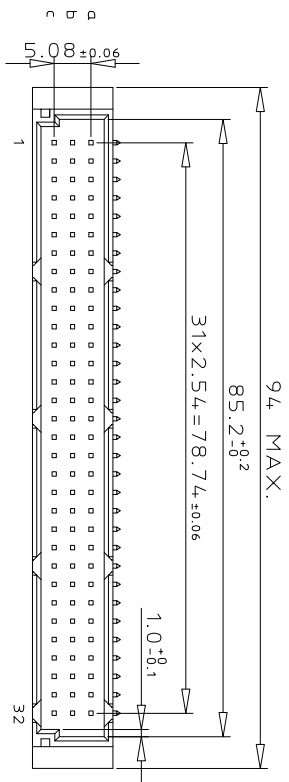

PCB LAYOUT

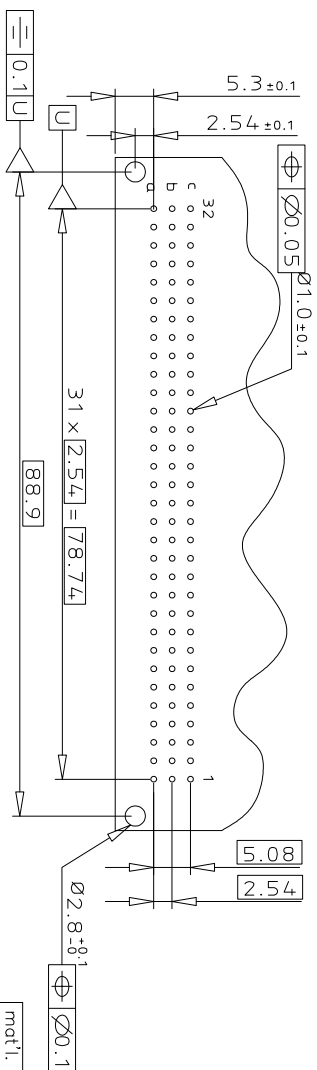


DATE CODE PRINTING
YY-YEAR, XX-WEEK

11.1 MAX.

5.01

TERMINATION

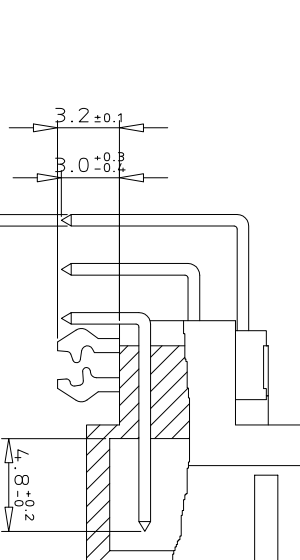

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	b	c								
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C										
TERMINATION										
ANGLED SPILL										
OPTIONS										
NO. OPTION WITH HARDWARE										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
AS PER MIL C 55302 / JSS 50908										
PITCH PER ROW										
2.54 mm										
LEAD FREE VERSION										

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code	SEE DRAWING C-8609-0000A	surface	ISO 1302	tolerance	ISO 406 ISO 1101	projection	mm	product family	8609
tr	ecn no dr	date	tolerance unless otherwise specified	0.X	\pm 0.1			title	DIN STANDARD HEADER
A	104-0063	MINI 2004-09-16	0.XX	\pm 0.1				DIN 41612 STYLE C	
B	105-0042	MINI 2005-05-19	0.XXX	\pm 0.1					
C	106-0061	MINI 2006-05-31	0*2*	0.XXX	\pm 0.1	Scale 3:2		dwg no	C-8609-2001
D	107-0100	KR 2007-08-29						sheet 1 of 1 size	A3
E	108-0146	KR 2008-10-21	eng_ RAKHE G					Product Customer Drawing	
			chr KESAVAN R						
			oppd KESAVAN R						
sheet index	revision sheet	1							

