



PD55003L-E

RF POWER TRANSISTOR The LdmoST Plastic FAMILY


General features

- Excellent thermal stability
- Common source configuration
- $P_{OUT} = 3W$ with 17dB gain@500MHz/12.5V
- New leadless plastic package
- ESD protection
- Supplied in tape & reel of 3K units
- In compliance with 2002/95/EC european directive


Description

The PD55003L-E is a common source N-Channel, enhancement-mode lateral Field-Effect RF power transistor. It is designed for high gain, broadband commercial and industrial application. It operates at 12V in common source mode at frequencies of up to 1GHz. PD5500L-E boasts the excellent gain, linearity and reliability of STH1LV latest LD-MOS technology mounted in the innovative leadless SMD plastic package, PowerFLAT™.

PD5500L-E's superior linearity performances makes it an ideal solution for car mobile radio.

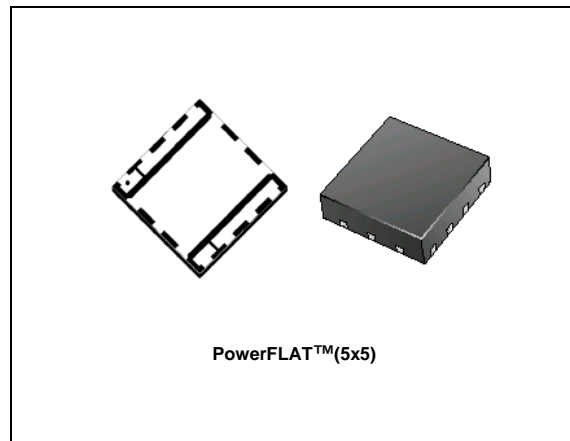

PIN configuration

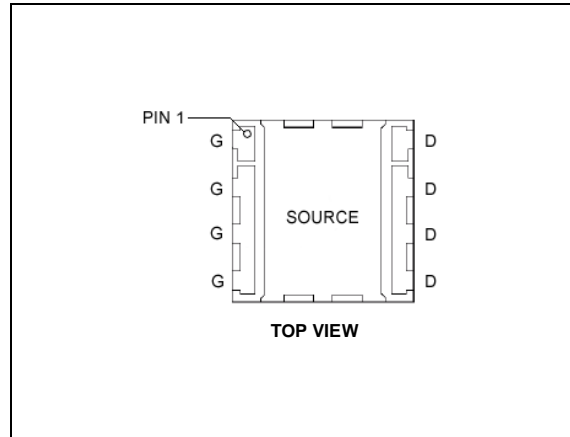

Order codes

| Sales Type | Marking | Package | Packaging |
|------------|---------|-----------------|-------------|
| PD55003L-E | 55003 | PowerFLAT™(5x5) | TAPE & REEL |

Contents:

| | | |
|----------|--|-----------|
| 1 | Electrical data | 3 |
| 1.1 | Maximum Ratings | 3 |
| 1.2 | Thermal data | 3 |
| 2 | Electrical specification | 4 |
| 2.1 | Typical performances | 6 |
| 2.2 | Typical performance (<i>broadband</i>) | 8 |
| 3 | Test circuit schematic | 9 |
| 3.1 | Test Circuit | 10 |
| 3.2 | Test circuit photomaster | 10 |
| 4 | Package mechanical data | 14 |
| 5 | Revision history | 18 |

1 Electrical data

1.1 Maximum Ratings

Table 1. Absolute maximum ratings ($T_{CASE}=25^{\circ}C$)

| Symbol | Parameter | Value | Unit |
|---------------|--|--------------|-------------|
| $V_{(BR)DSS}$ | Drain-Source Voltage | 40 | V |
| V_{GS} | Gate-Source Voltage | -0.5 to +15 | V |
| I_D | Drain Current | 2.5 | A |
| P_{DISS} | Power Dissipation (@ $T_C = 70^{\circ}C$) | 14 | W |
| T_{stg} | Storage Temperature | - 65 to +150 | $^{\circ}C$ |
| T_j | Operating Junction Temperature | 150 | $^{\circ}C$ |

1.2 Thermal data

Table 2. Thermal data

| Symbol | Parameter | Value | Unit |
|---------------|----------------------------------|-------|---------------|
| $R_{th(j-c)}$ | Junction-Case Thermal Resistance | 5.7 | $^{\circ}C/W$ |

2 Electrical specification

($T_{CASE}=25^{\circ}C$)

Table 3. Static

| Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|-----------------------------------|------|------|------|---------|
| I_{DSS} | $V_{GS}=0V, V_{DS}=28V$ | | | 1 | μA |
| I_{GSS} | $V_{GS}=20V, V_{DS}=0V$ | | | 1 | μA |
| $V_{GS(Q)}$ | $V_{DS}=10V, I_D=50mA$ | 2.0 | | 5.0 | V |
| $V_{DS(ON)}$ | $V_{GS}=10V, I_D=0.5A$ | | | 0.36 | V |
| g_{fs} | $V_{DS}=10V, I_D=1A$ | | 1.0 | | mho |
| C_{iss} | $V_{GS}=0V, V_{DS}=12.5V, f=1MHz$ | | 34 | | pF |
| C_{oss} | | | 23 | | pF |
| C_{rss} | | | 1.8 | | pF |

Table 4. Dynamic

| Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|---------------|---|------|------|------|------|
| P_{1dB} | $V_{DD}=12.5V, I_{DQ}=50mA, f=500MHz$ | 3 | | | W |
| G_P | $V_{DD}=12.5V, I_{DQ}=50mA, P_{OUT}=3W, f=500MHz$ | 17 | 19 | | dB |
| η_D | $V_{DD}=12.5V, I_{DQ}=50mA, P_{OUT}=3W, f=500MHz$ | 50 | 52 | | % |
| Load mismatch | $V_{DD}=12.5V, I_{DQ}=50mA, P_{OUT}=3W, f=500MHz$ | 20:1 | | | VSWR |

Table 5. Switching on/off (inductive load)

| Test Conditions | Class |
|------------------|-------|
| Human Body Model | 2 |
| Machine Model | M3 |

Table 6. Switching energy (inductive load)

| Test Methodology | Rating |
|------------------|--------|
| J-STD-020B | MSL 3 |

Figure 1. Typical Input/Drain load Impedances

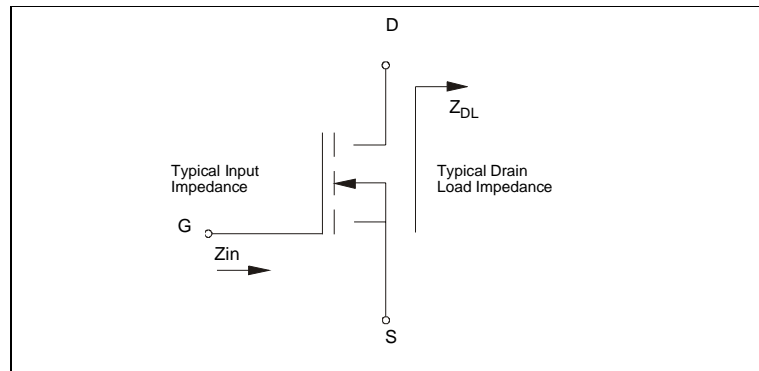


Table 7. Impedance Data

| FREQ. MHz | $Z_{IN}(\Omega)$ | $Z_{DL}(\Omega)$ |
|-----------|------------------|------------------|
| 480 | $1.79 - j 4.96$ | $10.68 + j 7.45$ |
| 500 | $1.88 - j 5.93$ | $10.28 + j 8.92$ |
| 520 | $2.10 - j 7.03$ | $9.86 + j 10.18$ |

2.1 Typical performances

Figure 2. Capacitance Vs supply Voltage

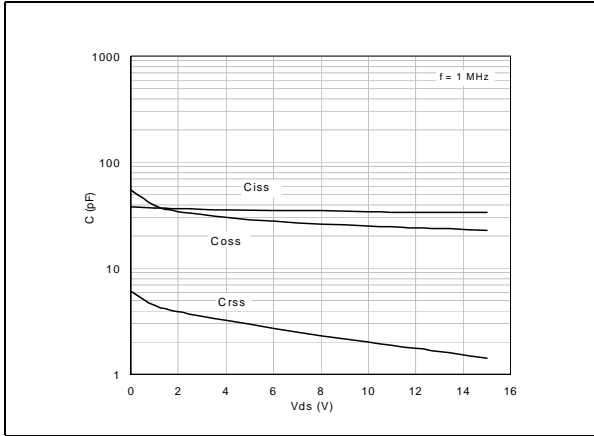


Figure 3. Output Power Vs Input Power

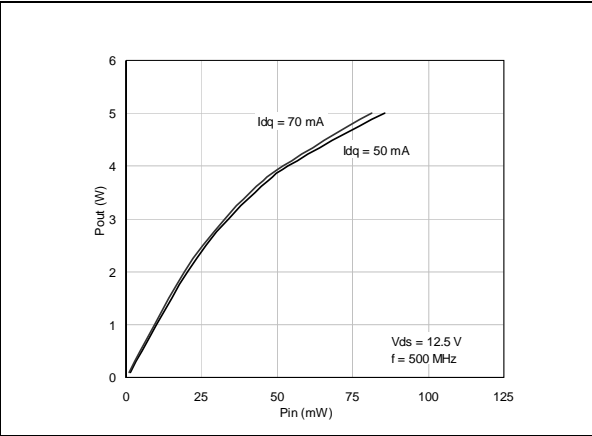


Figure 4. Power Gain Vs Output Power

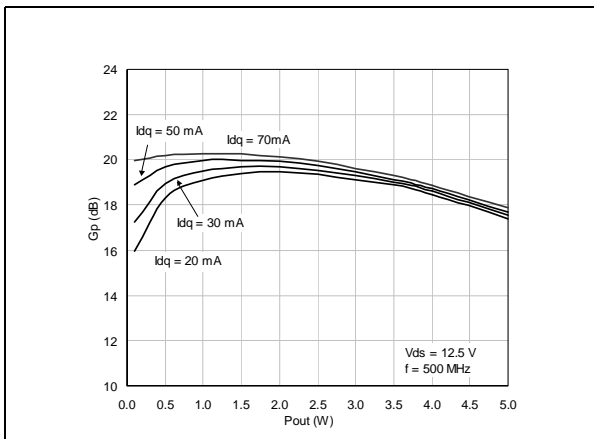


Figure 5. Efficiency Vs Output Power

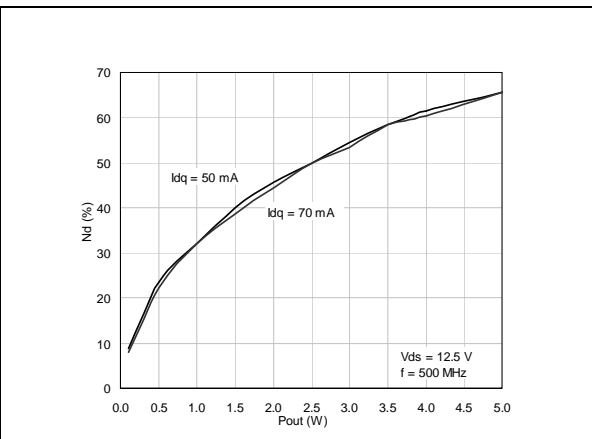


Figure 6. Input Return Loss Vs Output Power

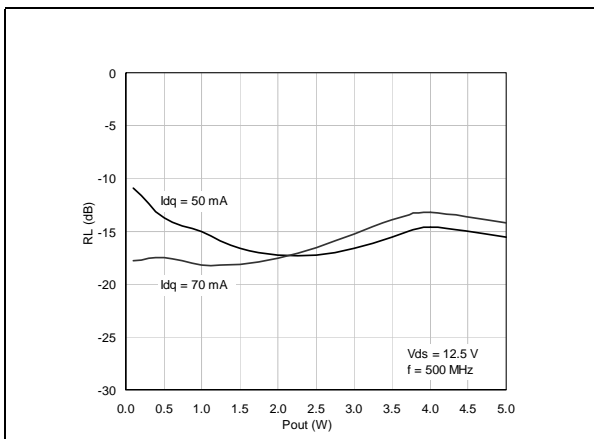


Figure 7. Output Power Vs Bias Current

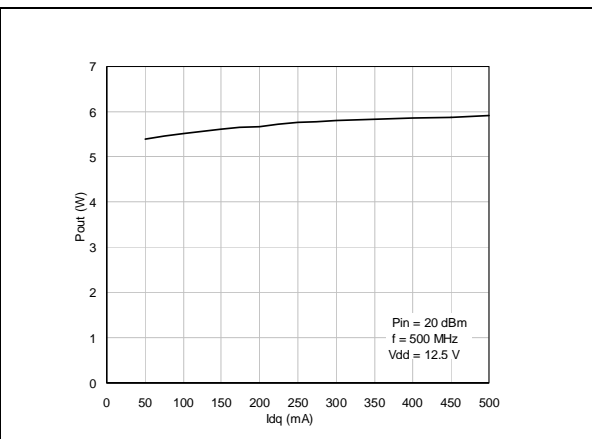


Figure 8. Efficiency Vs Bias Current

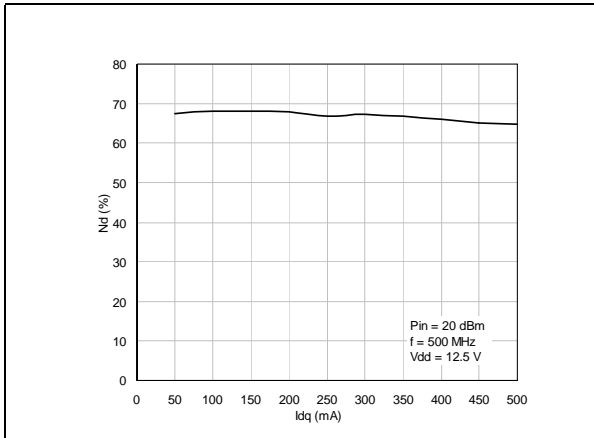


Figure 9. Output Power Vs Supply Voltage


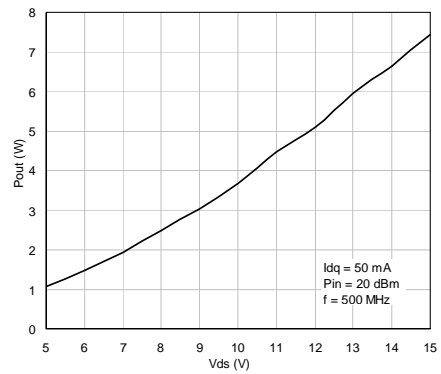


Figure 10. Output Power Vs Gate-Source Voltage

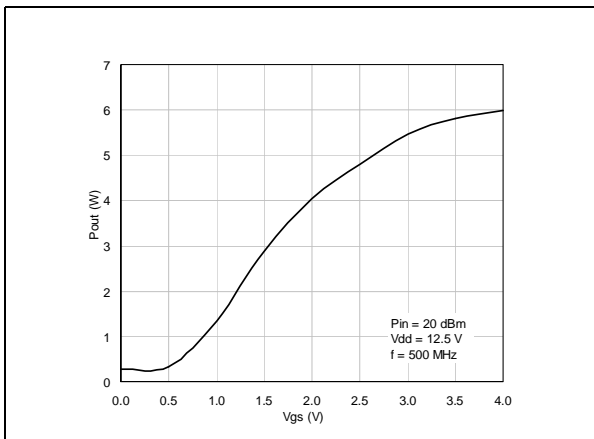

2.2 Typical performance (broadband)

Figure 11. Power Gain Vs Frequency

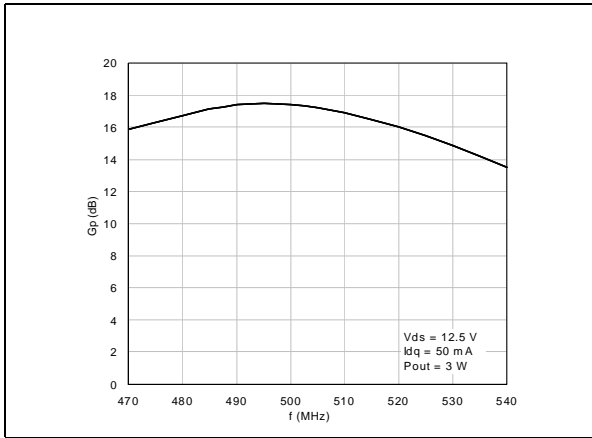


Figure 12. Efficiency Vs Frequency


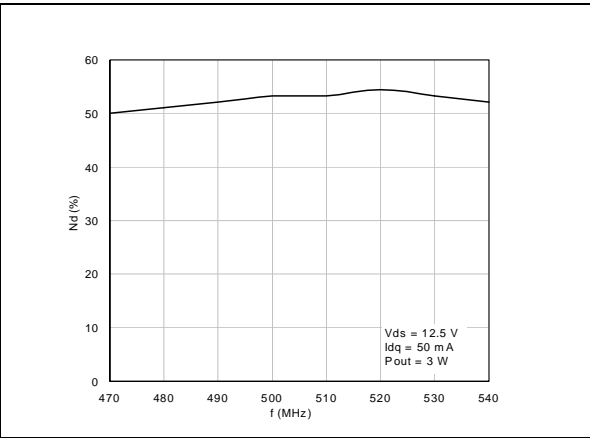


Figure 13. Return Loss Vs Frequency

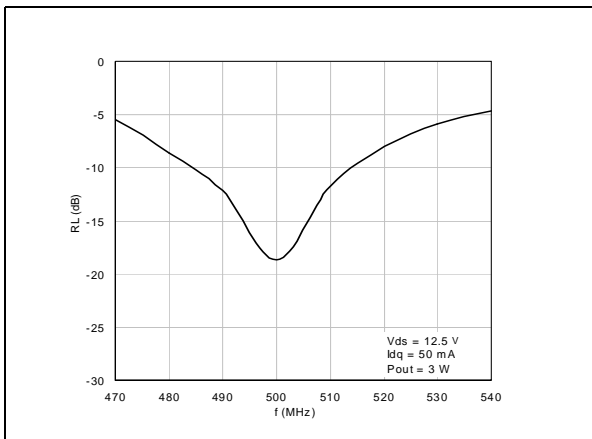

3 Test circuit schematic


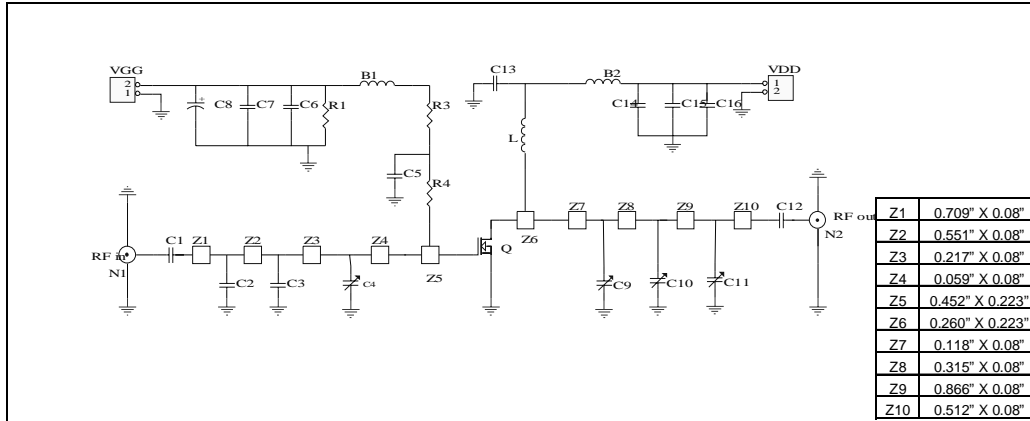


Table 8. Test Circuit Component List

| Component | Description |
|-----------|--|
| B1, B2 | FERRIDE BEAD |
| C1, C12 | 3000Pf, 100B ATC CHIP CAPACITOR |
| C2, C3 | 15pF, 100B ATC CHIP CAPACITOR |
| C4, C9 | 0 -:- 20 pF VARIABLE CAPACITOR JOHANSON |
| C5, C13 | 120pF 100B ACT CHIP CAPACITOR |
| C6, C14 | 0.1mF 100B ACT CAPACITOR |
| C7, C15 | 1200pF 100B ACT CAPACITOR |
| C8, C16 | 10μF, 35V, SMD ELECTROLYTIC CAPACITOR |
| C10 | 0.5 -:- 5pF VARIABLE CAPACITOR JOHANSON |
| C11 | 0.8 -:- 10pF VARIABLE CAPACITOR JOHANSON |
| R1 | 33KΩ CHIP RESISTOR 1W |
| R2, R3 | 15Ω MELF RESISTOR 1W |
| R4 | 1KΩ CHIP RESISTOR 1W |
| N1, N2 | TYPE N FLANGE MOUNT |
| BOARD | ROGER ULTRA LAM 2000 THK 0.030" ε _r = 2.55 2OZ ED Cu BOTH SIDES |

3.1 Test Circuit

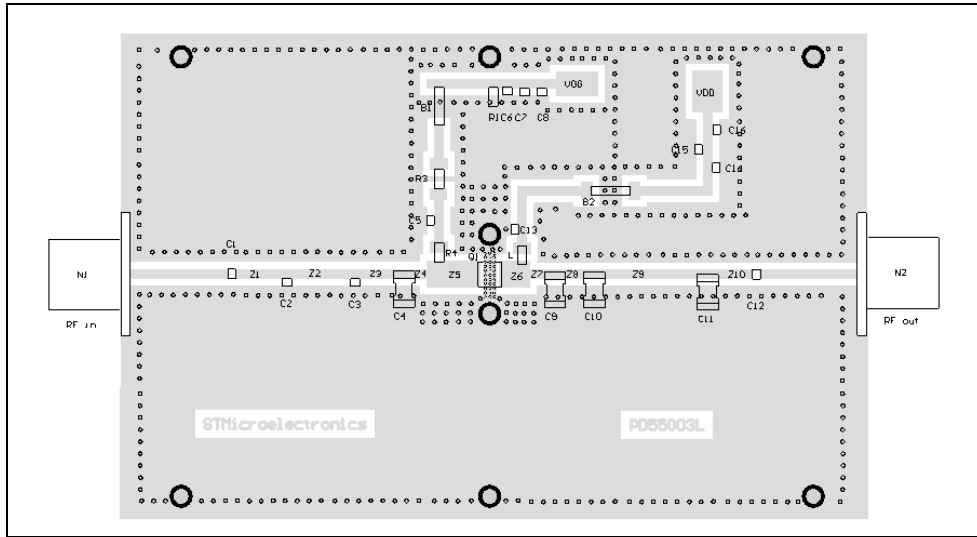

3.2 Test circuit photomaster

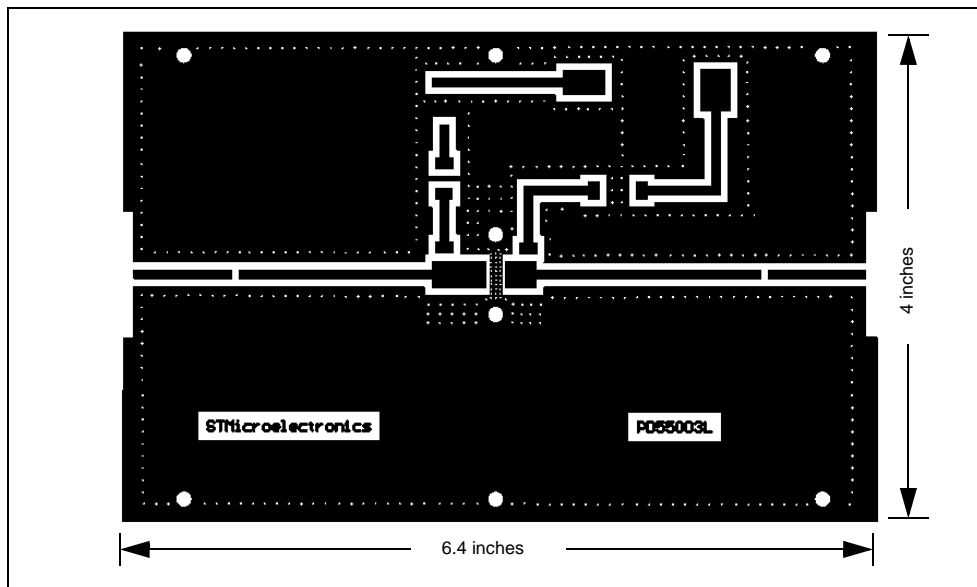


Table 9. S-Parameter (PD55003L) $(V_{DS}=12.5V, I_{DS}=0.15A)$

| FREQ (MHz) | $ S_{11} $ | $\angle S_{11}$ | $ S_{21} $ | $\angle S_{21}$ | $ S_{12} $ | $\angle S_{12}$ | $ S_{22} $ | $\angle S_{22}$ |
|---------------|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|
| 50 | 0.808 | -110 | 20.14 | 112 | 0.039 | 22 | 0.672 | -109 |
| 100 | 0.772 | -141 | 11.77 | 93 | 0.042 | 5 | 0.633 | -138 |
| 150 | 0.771 | -152 | 7.86 | 82 | 0.041 | -5 | 0.642 | -147 |
| 200 | 0.779 | -157 | 5.80 | 73 | 0.040 | -11 | 0.665 | -151 |
| 250 | 0.794 | -161 | 4.50 | 66 | 0.038 | -17 | 0.694 | -154 |
| 300 | 0.809 | -163 | 3.62 | 60 | 0.035 | -22 | 0.721 | -155 |
| 350 | 0.824 | -165 | 2.98 | 54 | 0.033 | -26 | 0.750 | -157 |
| 400 | 0.839 | -166 | 2.50 | 49 | 0.031 | -30 | 0.774 | -159 |
| 450 | 0.853 | -168 | 2.13 | 44 | 0.028 | -32 | 0.796 | -160 |
| 500 | 0.865 | -169 | 1.83 | 40 | 0.025 | -34 | 0.818 | -161 |
| 550 | 0.874 | -171 | 1.59 | 36 | 0.023 | -36 | 0.837 | -163 |
| 600 | 0.885 | -172 | 1.39 | 33 | 0.021 | -36 | 0.852 | -164 |
| 650 | 0.894 | -173 | 1.23 | 29 | 0.018 | -37 | 0.867 | -165 |
| 700 | 0.901 | -174 | 1.10 | 26 | 0.016 | -37 | 0.880 | -166 |
| 750 | 0.906 | -175 | 0.97 | 23 | 0.015 | -36 | 0.890 | -167 |
| 800 | 0.911 | -176 | 0.88 | 20 | 0.012 | -32 | 0.902 | -169 |
| 850 | 0.916 | -177 | 0.79 | 18 | 0.011 | -28 | 0.909 | -169 |
| 900 | 0.918 | -178 | 0.72 | 15 | 0.010 | -22 | 0.918 | -171 |
| 950 | 0.922 | -179 | 0.65 | 13 | 0.008 | -13 | 0.922 | -171 |
| 1000 | 0.925 | 180 | 0.59 | 11 | 0.007 | -7 | 0.928 | -172 |
| 1050 | 0.925 | 179 | 0.54 | 9 | 0.007 | 8 | 0.934 | -173 |
| 1100 | 0.928 | 178 | 0.50 | 7 | 0.006 | 21 | 0.938 | -174 |
| 1150 | 0.927 | 177 | 0.46 | 5 | 0.007 | 38 | 0.941 | -175 |
| 1200 | 0.928 | 176 | 0.43 | 4 | 0.008 | 51 | 0.944 | -176 |
| 1250 | 0.929 | 175 | 0.40 | 2 | 0.010 | 56 | 0.947 | -176 |
| 1300 | 0.927 | 175 | 0.37 | 1 | 0.011 | 61 | 0.953 | -177 |
| 1350 | 0.927 | 174 | 0.34 | -1 | 0.011 | 65 | 0.951 | -178 |
| 1400 | 0.925 | 173 | 0.32 | -2 | 0.012 | 68 | 0.952 | -178 |
| 1450 | 0.922 | 172 | 0.30 | -4 | 0.014 | 72 | 0.954 | -179 |
| 1500 | 0.922 | 172 | 0.28 | -5 | 0.016 | 73 | 0.957 | -180 |

Table 10. S-Parameter (PD55003L)

 $(V_{DS}=12.5V, I_{DS}=0.8A)$

| FREQ (MHz) | $ S_{11} $ | $\angle S_{11}$ | $ S_{21} $ | $\angle S_{21}$ | $ S_{12} $ | $\angle S_{12}$ | $ S_{22} $ | $\angle S_{22}$ |
|---------------|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|
| 50 | 0.841 | -124 | 22.20 | 107 | 0.029 | 21 | 0.651 | -130 |
| 100 | 0.800 | -150 | 12.84 | 92 | 0.031 | 6 | 0.654 | -153 |
| 150 | 0.800 | -159 | 8.59 | 83 | 0.031 | -2 | 0.666 | -159 |
| 200 | 0.803 | -163 | 6.38 | 76 | 0.030 | -8 | 0.684 | -161 |
| 250 | 0.812 | -166 | 5.00 | 70 | 0.028 | -11 | 0.702 | -163 |
| 300 | 0.822 | -168 | 4.07 | 64 | 0.027 | -15 | 0.721 | -163 |
| 350 | 0.830 | -169 | 3.39 | 59 | 0.025 | -17 | 0.740 | -164 |
| 400 | 0.837 | -170 | 2.87 | 55 | 0.024 | -20 | 0.760 | -165 |
| 450 | 0.848 | -172 | 2.47 | 50 | 0.022 | -23 | 0.777 | -166 |
| 500 | 0.857 | -172 | 2.15 | 46 | 0.020 | -23 | 0.795 | -166 |
| 550 | 0.866 | -174 | 1.89 | 42 | 0.018 | -25 | 0.813 | -167 |
| 600 | 0.874 | -174 | 1.67 | 39 | 0.017 | -23 | 0.825 | -168 |
| 650 | 0.882 | -175 | 1.49 | 35 | 0.015 | -24 | 0.839 | -168 |
| 700 | 0.887 | -176 | 1.33 | 32 | 0.013 | -22 | 0.853 | -169 |
| 750 | 0.893 | -177 | 1.19 | 29 | 0.012 | -16 | 0.863 | -170 |
| 800 | 0.898 | -178 | 1.08 | 26 | 0.011 | -15 | 0.875 | -171 |
| 850 | 0.903 | -179 | 0.98 | 23 | 0.010 | -11 | 0.885 | -172 |
| 900 | 0.904 | -180 | 0.89 | 21 | 0.009 | -1 | 0.893 | -173 |
| 950 | 0.909 | 179 | 0.82 | 19 | 0.008 | 7 | 0.901 | -173 |
| 1000 | 0.911 | 179 | 0.75 | 16 | 0.008 | 16 | 0.904 | -174 |
| 1050 | 0.914 | 178 | 0.69 | 14 | 0.008 | 27 | 0.911 | -175 |
| 1100 | 0.916 | 177 | 0.64 | 12 | 0.008 | 35 | 0.916 | -175 |
| 1150 | 0.917 | 176 | 0.59 | 10 | 0.009 | 43 | 0.919 | -176 |
| 1200 | 0.917 | 176 | 0.55 | 8 | 0.010 | 48 | 0.923 | -177 |
| 1250 | 0.918 | 175 | 0.51 | 6 | 0.010 | 57 | 0.929 | -177 |
| 1300 | 0.917 | 174 | 0.47 | 5 | 0.012 | 62 | 0.929 | -178 |
| 1350 | 0.917 | 173 | 0.44 | 3 | 0.013 | 63 | 0.934 | -179 |
| 1400 | 0.914 | 173 | 0.42 | 1 | 0.013 | 67 | 0.936 | -179 |
| 1450 | 0.912 | 172 | 0.39 | 0 | 0.015 | 71 | 0.938 | -180 |
| 1500 | 0.911 | 171 | 0.36 | -2 | 0.016 | 72 | 0.941 | 179 |

Table 11. S-Parameter (PD55003L)

(V_{DS}=12.5V, I_{DS}=1.5A)

| FREQ (MHz) | S ₁₁ | S ₁₁ ∠Φ | S ₂₁ | S ₂₁ ∠Φ | S ₁₂ | S ₁₂ ∠Φ | S ₂₂ | S ₂₂ ∠Φ |
|---------------|-----------------|--------------------|-----------------|--------------------|-----------------|--------------------|-----------------|--------------------|
| 50 | 0.837 | -114 | 18.43 | 111 | 0.030 | 24 | 0.588 | -132 |
| 100 | 0.799 | -143 | 10.49 | 93 | 0.033 | 6 | 0.632 | -152 |
| 150 | 0.801 | -154 | 6.99 | 82 | 0.032 | -3 | 0.656 | -158 |
| 200 | 0.809 | -159 | 5.15 | 74 | 0.031 | -9 | 0.680 | -160 |
| 250 | 0.823 | -163 | 4.00 | 67 | 0.029 | -14 | 0.701 | -162 |
| 300 | 0.835 | -165 | 3.22 | 61 | 0.028 | -18 | 0.726 | -163 |
| 350 | 0.845 | -167 | 2.66 | 56 | 0.025 | -20 | 0.750 | -164 |
| 400 | 0.855 | -169 | 2.23 | 52 | 0.024 | -24 | 0.768 | -165 |
| 450 | 0.866 | -170 | 1.91 | 47 | 0.022 | -26 | 0.789 | -166 |
| 500 | 0.876 | -171 | 1.65 | 43 | 0.020 | -24 | 0.812 | -167 |
| 550 | 0.882 | -173 | 1.44 | 39 | 0.018 | -25 | 0.828 | -167 |
| 600 | 0.892 | -174 | 1.26 | 36 | 0.016 | -25 | 0.836 | -168 |
| 650 | 0.898 | -175 | 1.12 | 33 | 0.015 | -25 | 0.844 | -169 |
| 700 | 0.903 | -176 | 1.00 | 29 | 0.013 | -20 | 0.857 | -170 |
| 750 | 0.907 | -177 | 0.90 | 27 | 0.011 | -17 | 0.868 | -171 |
| 800 | 0.909 | -178 | 0.81 | 24 | 0.010 | -10 | 0.883 | -171 |
| 850 | 0.912 | -179 | 0.73 | 21 | 0.009 | -6 | 0.889 | -172 |
| 900 | 0.915 | -180 | 0.67 | 19 | 0.009 | 1 | 0.894 | -173 |
| 950 | 0.917 | 179 | 0.61 | 17 | 0.008 | 17 | 0.905 | -174 |
| 1000 | 0.917 | 178 | 0.56 | 15 | 0.008 | 24 | 0.907 | -174 |
| 1050 | 0.918 | 178 | 0.51 | 13 | 0.008 | 32 | 0.908 | -175 |
| 1100 | 0.920 | 177 | 0.47 | 11 | 0.009 | 40 | 0.912 | -176 |
| 1150 | 0.920 | 176 | 0.44 | 9 | 0.010 | 48 | 0.919 | -177 |
| 1200 | 0.920 | 175 | 0.41 | 7 | 0.010 | 57 | 0.922 | -177 |
| 1250 | 0.919 | 174 | 0.38 | 6 | 0.012 | 59 | 0.926 | -178 |
| 1300 | 0.919 | 174 | 0.35 | 4 | 0.013 | 61 | 0.931 | -179 |
| 1350 | 0.918 | 173 | 0.33 | 3 | 0.014 | 63 | 0.928 | -179 |
| 1400 | 0.917 | 172 | 0.31 | 1 | 0.015 | 68 | 0.929 | -180 |
| 1450 | 0.914 | 172 | 0.29 | 0 | 0.016 | 70 | 0.933 | 180 |
| 1500 | 0.912 | 171 | 0.27 | -1 | 0.018 | 71 | 0.935 | 179 |

4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com

Table 12. PowerFLAT™ Mechanical Data

| Dim. | mm | | | inch | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | 0.90 | 1.00 | | 0.035 | 0.039 |
| A1 | | 0.02 | 0.05 | | 0.001 | 0.002 |
| A3 | | 0.24 | | | 0.009 | |
| AA | 0.15 | 0.25 | 0.35 | 0.006 | 0.01 | 0.014 |
| b | 0.43 | 0.51 | 0.58 | 0.017 | 0.020 | 0.023 |
| c | 0.64 | 0.71 | 0.79 | 0.025 | 0.028 | 0.031 |
| D | | 5.00 | | | 0.197 | |
| d | | 0.30 | | | 0.011 | |
| E | | 5.00 | | | 0.197 | |
| E2 | 2.49 | 2.57 | 2.64 | 0.098 | 0.101 | 0.104 |
| e | | 1.27 | | | 0.050 | |
| f | | 3.37 | | | 0.132 | |
| g | | 0.74 | | | 0.03 | |
| h | | 0.21 | | | 0.008 | |

Figure 14. PowerFLAT™ Package Dimensions

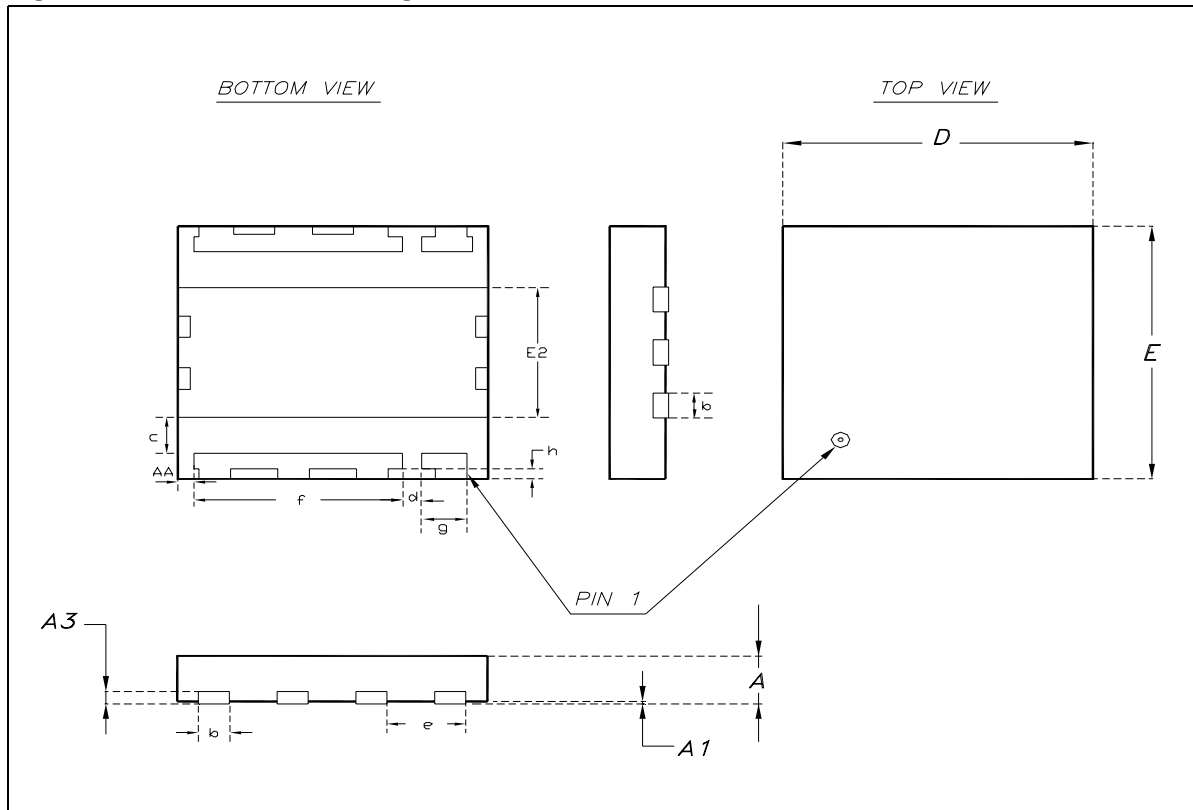


Table 13. PowerFLAT™ Tape & Reel Dimensions

| DIM. | mm. | | |
|------|------|------|------|
| | MIN. | TYP | MAX. |
| Ao | 5.15 | 5.25 | 5.35 |
| Bo | 5.15 | 5.25 | 5.35 |
| Ko | 1.0 | 1.1 | 1.2 |

Figure 15. PowerFLAT™ Tape & Reel


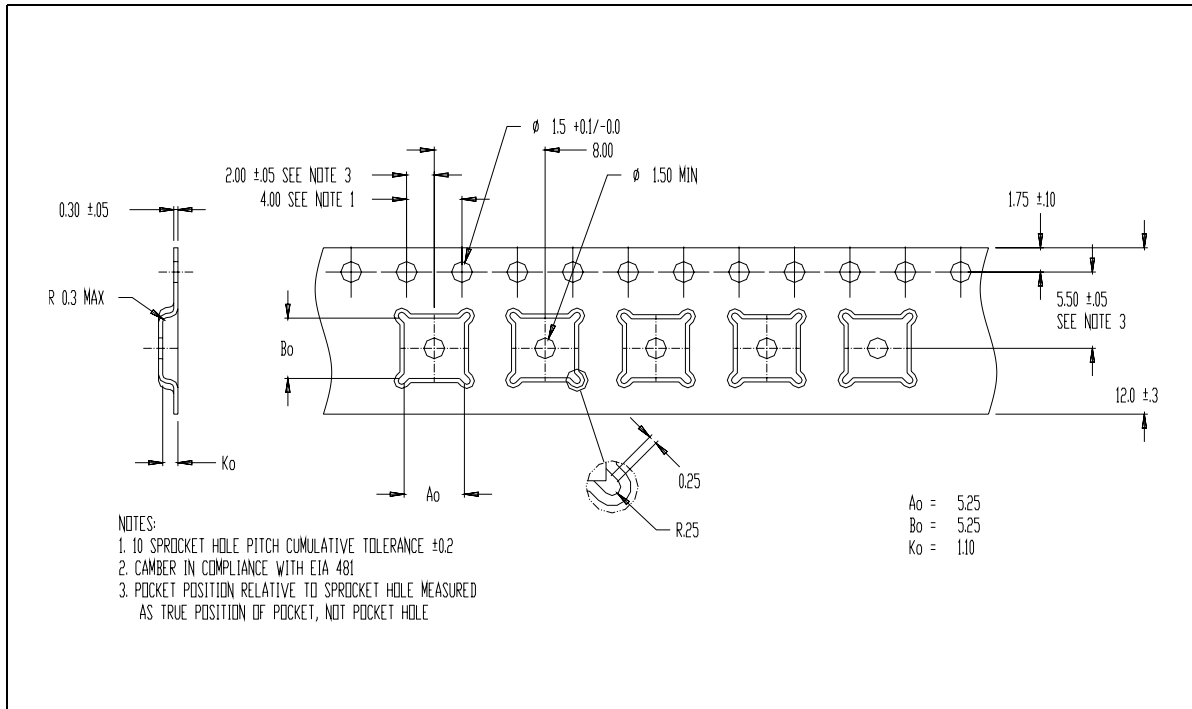


Table 14. Recommended FOOTPRINT

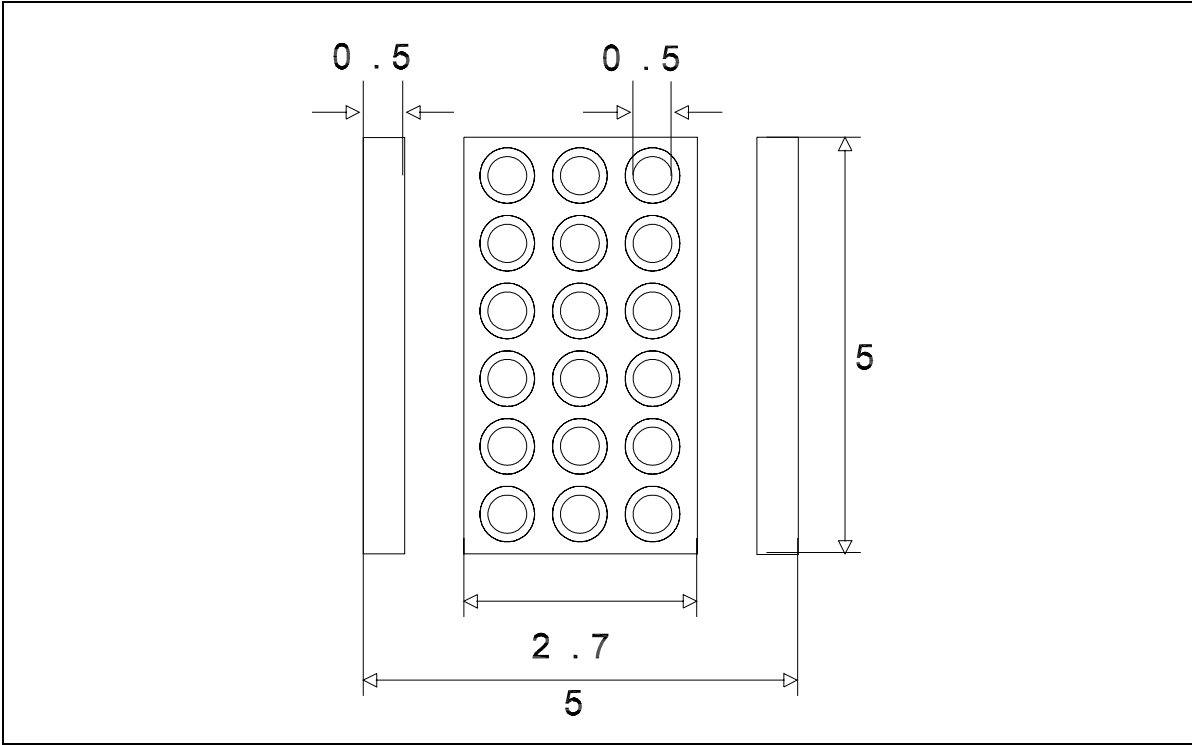

5 Revision history

Table 15. Document revision history

| Date | Revision | Changes |
|-------------|----------|-------------|
| 14-Feb-2006 | 1 | First Issue |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

