

FEATURES


- **NEW MINIATURE M13 PACKAGE:**
 - Small transistor outline –
1.0 X 0.5 X 0.5 mm
 - Low profile / 0.50 mm package height
 - Flat lead style for better RF performance
- **HIGH GAIN BANDWIDTH PRODUCT:**
f_T = 7 GHz
- **LOW NOISE FIGURE:**
NF = 1.4 dB

DESCRIPTION

NEC's NE681M13 transistor is ideal for low noise, high gain, and low cost amplifier applications. NEC's new low profile/flat lead style "M13" package is ideal for today's portable wireless applications. The NE681 is also available in chip, Micro-x, and six different low cost plastic surface mount package styles.

OUTLINE DIMENSIONS (Units in mm)

PACKAGE OUTLINE M13

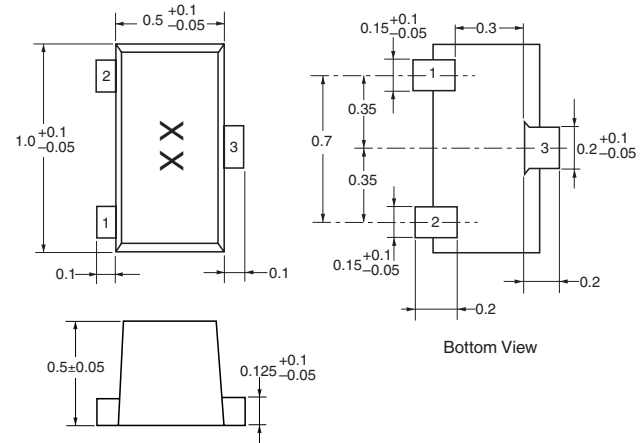

PIN CONNECTIONS

1. Emitter
2. Base
3. Collector

ELECTRICAL CHARACTERISTICS (T_A = 25°C)

| PART NUMBER EIAJ ¹ REGISTERED NUMBER PACKAGE OUTLINE | | NE681M13 2SC5615 M13 | | | |
|---|---|----------------------------|-----|-----|-----|
| SYMBOLS | PARAMETERS AND CONDITIONS | UNITS | MIN | TYP | MAX |
| f _T | Gain Bandwidth at V _{CE} = 3 V, I _C = 7 mA, f = 1 GHz | GHz | 4.5 | 7 | |
| NF | Noise Figure at V _{CE} = 3 V, I _C = 7 mA, f = 1 GHz | dB | | 1.4 | 2.7 |
| IS _{21E} ² | Insertion Power Gain at V _{CE} = 3 V, I _C = 7 mA, f = 1 GHz | dB | 10 | 12 | |
| h _{FE} ² | Forward Current Gain at V _{CE} = 3 V, I _C = 7 mA | | 80 | | 145 |
| I _{CBO} | Collector Cutoff Current at V _{CB} = 10 V, I _E = 0 | μA | | | 0.8 |
| I _{EBO} | Emitter Cutoff Current at V _{EB} = 1 V, I _C = 0 | μA | | | 0.8 |
| CRE ³ | Feedback Capacitance at V _{CB} = 3 V, I _E = 0, f = 1 MHz | pF | | | 0.9 |

Notes:

1. Electronic Industrial Association of Japan.
2. Pulsed measurement, pulse width ≤ 350 μs, duty cycle ≤ 2 %.
3. Capacitance is measured with emitter and case connected to the guard terminal at the bridge.

ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)

| SYMBOLS | PARAMETERS | UNITS | RATINGS |
|-----------------------------|------------------------------|-------|-------------|
| V _{CBO} | Collector to Base Voltage | V | 20 |
| V _{CEO} | Collector to Emitter Voltage | V | 10 |
| V _{EBO} | Emitter to Base Voltage | V | 1.5 |
| I _C | Collector Current | mA | 65 |
| P _T ² | Total Power Dissipation | mW | 140 |
| T _J | Junction Temperature | °C | 150 |
| T _{STG} | Storage Temperature | °C | -65 to +150 |



Notes:

1. Operation in excess of any one of these parameters may result in permanent damage.
2. With device mounted on 1.08 cm² X 1.2 mm glass epoxy board.

ORDERING INFORMATION

| PART NUMBER | QUANTITY |
|---------------|----------|
| NE681M13-A | |
| NE681M13-T3-A | |

TYPICAL PERFORMANCE CURVES (T_A = 25°C)

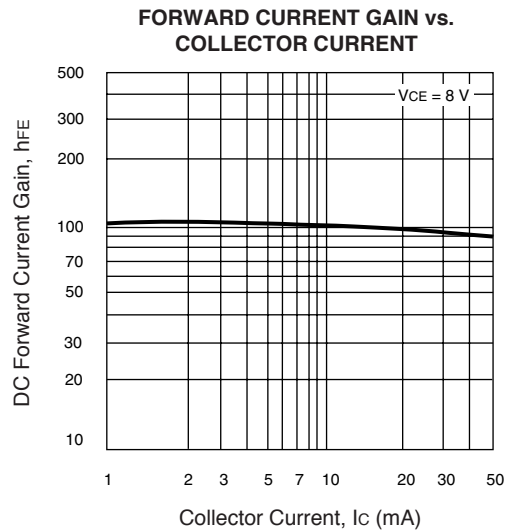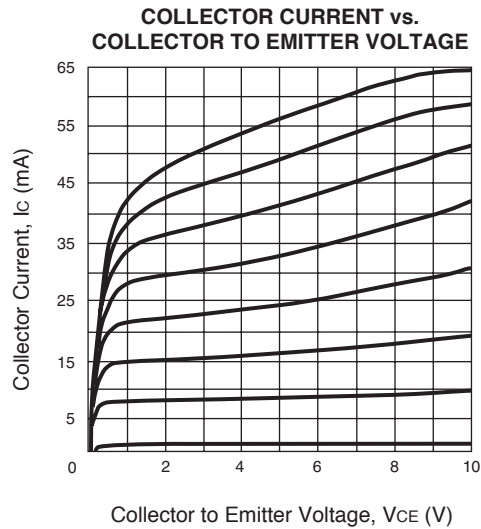

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
 24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>

DATA SUBJECT TO CHANGE WITHOUT NOTICE

2/09/2000

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

| Restricted Substance per RoHS | Concentration Limit per RoHS (values are not yet fixed) | Concentration contained in CEL devices | |
|-------------------------------|---|--|-----|
| | | -A | -AZ |
| Lead (Pb) | < 1000 PPM | Not Detected | (*) |
| Mercury | < 1000 PPM | Not Detected | |
| Cadmium | < 100 PPM | Not Detected | |
| Hexavalent Chromium | < 1000 PPM | Not Detected | |
| PBB | < 1000 PPM | Not Detected | |
| PBDE | < 1000 PPM | Not Detected | |

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL’s liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.