


2N3700


General purpose amplifiers

Description

The 2N3700 is silicon planar epitaxial NPN transistor in Jedec TO-18 metal case. It is intended for small signal, low noise industrial applications.

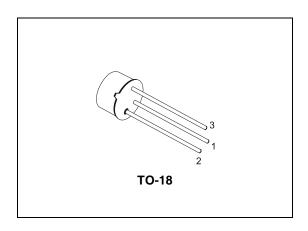

Internal schematic diagram

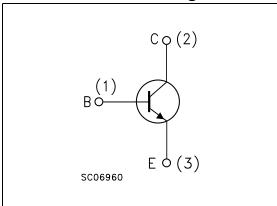

Order codes

Part Number	Marking	Package	Packing
2N3700	2N3700	TO-18	Bag

November 2006 Rev 2 1/7

Electrical ratings 2N3700

1 Electrical ratings

Table 1. Absolute maximum rating

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-emitter voltage (I _E = 0)	140	V
V _{CEO}	Collector-emitter voltage (I _B = 0)	80	V
V _{EBO}	Emitter-base voltage (I _C = 0)	7	V
I _C	Collector current	1	Α
	Total dissipation at T _{amb} ≤ 25°C	0.5	W
P _{tot}	at T _{case} ≤ 25°C	1.8	W
	at T _{case} ≤ 100°C	1	W
T _{stg}	Storage temperature	-65 to 200	°C
TJ	Max. operating junction temperature	200	°C

Table 2. Thermal data

Symbol	Parameter	Value	Unit
R _{thj-case}	Thermal resistance junction-case max	97	°C/W
R _{thj-amb}	Thermal resistance junction-ambient max	350	°C/W

57

2N3700 Electrical characteristics

2 Electrical characteristics

 $(T_{CASE} = 25^{\circ}C; unless otherwise specified)$

Table 3. Electrical characteristics

Symbol	Parameter	Test Conditions		Min.	Тур.	Max.	Unit
I _{CBO}	Collector cut-off current (I _E = 0)	V _{CB} = 90V V _{CB} = 90V	T _{amb} = 150°C			10 10	nA μA
I _{EBO}	Emitter cut-off current (I _C = 0)	V _{EB} = 5V				10	nA
V _{(BR)CBO}	Collector-base breakdown voltage (I _E = 0)	I _C = 100μA		140			V
V _{(BR)CEO} ⁽¹⁾	Collector-emitter breakdown voltage (I _B = 0)	I _C = 30mA		80			V
V _{(BR)EBO}	Emitter-base breakdown voltage $(I_C = 0)$	I _E = 100μA		7			V
,, (1)	Collector-emitter saturation voltage	I _C = 150mA	I _B = 15mA			0.2	٧
V _{CE(sat)} (1)		I _C = 0.5A	$I_B = 50 \text{mA}$			0.5	٧
V _{BE(sat)} (1)	Base-emitter saturation voltage	I _C = 150mA	I _B = 15mA			1.1	٧
	DC current gain	I _C = 0.1mA	V _{CE} = 10V	50			
		I _C = 10mA	V _{CE} = 10V	90			
		I _C = 150mA	V _{CE} = 10V	100		300	
h _{FE}		I _C = 500mA	$V_{CE} = 10V$	50			
		I _C = 1A	$V_{CE} = 10V$	15			
		I _C = 150mA	V _{CE} = 10V				
		T _{amb} = -55°C		40			
h	Small signal current gain	I _C = 1mA	V _{CE} = 5V	00		400	
h _{fe}		f = 1kHz		80		400	
f	T	I _C = 50mA	V _{CE} = 10V		100		N/11-
f _T	Transition frequency	f = 20MHz			100		MHz
C _{EBO}	Emitter-base capacitance	I _C = 0	$V_{EB} = 0.5V$		60		pF
	Emilier-base capacitance	f = 1MHz			00		РΙ
C _{CBO}	Collector-base capacitance	I _E = 0	$V_{CB} = 10V$		12		pF
CRO	Concolor-base capacitance	f = 1MHz			12		ρı
r _{bb} , C _{b,c}	Feedback time constant	I _C = 10mA	$V_{CB} = 10V$	25		400	ps
¹bb' ∪b'c	. coasaan amo conotam	f = 4MHz		1		.00	Po

Note: (1) Pulsed: Pulse duration = 300 μ s, duty cycle \leq 1 %



Package mechanical data 2N3700


3 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com

577

TO-18 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
Α		12.7			0.500	
В			0.49			0.019
D			5.3			0.208
E			4.9			0.193
F			5.8			0.228
G	2.54			0.100		
Н			1.2			0.047
I			1.16			0.045
L	45°			45°		

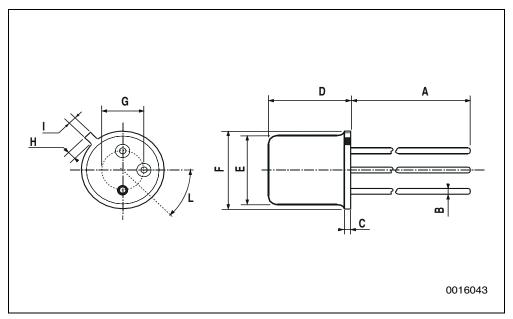

5//

Revision history 2N3700

4 Revision history

Table 4. Revision history

Date	Revision	Changes	
31-Jan-1989	1	First release	
06-Nov-2006	2	The document has been reformatted	

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZE REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



7/7