

SOT23 PNP SILICON PLANAR DARLINGTON TRANSISTORS


ISSUE 2 – MARCH 1995



FMMTA63 FMMTA64

PARTMARKING DETAIL – FMMTA63 - Z2U
FMMTA64 - Z2V

COMPLEMENTARY TYPES – FMMTA63 - FMMTA13
FMMTA64 - FMMTA14

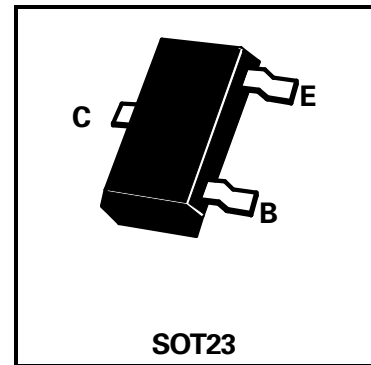

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	-30	V
Collector-Emitter Voltage	V_{CEO}	-30	V
Emitter-Base Voltage	V_{EBO}	-10	V
Peak Pulse Current	I_{CM}	-800	mA
Continuous Collector Current	I_C	-500	mA
Peak Base Current	I_{BM}	-200	mA
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	330	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$).

PARAMETER	SYMBOL	FMMTA63		FMMTA64		UNIT	CONDITIONS.
		MIN.	MAX.	MIN.	MAX.		
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-30		-30		V	$I_C=-10\mu A, I_E=0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-30		-30		V	$I_C=-10mA, I_B=0^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-10		-10		V	$I_E=-10\mu A, I_C=0$
Collector Cut-Off Current	I_{CBO}		-0.1		-0.1	μA	$V_{CB}=-30V, I_E=0$
Emitter Cut-Off Current	I_{EBO}		-0.1		-0.1	μA	$V_{CE}=-10V$
Static Forward Current Transfer Ratio	h_{FE}	5K 10K		10K 20K			$I_C=-10mA, V_{CE}=5V^*$ $I_C=-100mA, V_{CE}=5V^*$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-1.5		-1.5	V	$I_C=-100mA, I_B=-0.1mA^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-2.0		-2.0	V	$I_C=-100mA, I_B=-0.1mA^*$
Transition Frequency	f_T	125		125		MHz	$I_C=-50mA, V_{CE}=-5V$ $f=20MHz$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$
For typical characteristics graphs see FZTA63 datasheet.