

# MPS650, MPS651, NPN MPS750, MPS751, PNP

MPS651 and MPS751 are Preferred Devices

## Amplifier Transistors

### Features

- Pb-Free Packages are Available\*

### MAXIMUM RATINGS

Rating	Symbol	MPS650 MPS750	MPS651 MPS751	Unit
Collector - Emitter Voltage	$V_{CE}$	40	60	Vdc
Collector - Base Voltage	$V_{CB}$	60	80	Vdc
Emitter - Base Voltage	$V_{EB}$	5.0		Vdc
Collector Current - Continuous	$I_C$	2.0		Adc
Total Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	625 5.0		mW mW/ $^\circ\text{C}$
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	1.5 12		W mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-55 to +150		$^\circ\text{C}$

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

### THERMAL CHARACTERISTICS



Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	200	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	83.3	$^\circ\text{C}/\text{W}$

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.




ON Semiconductor®

<http://onsemi.com>

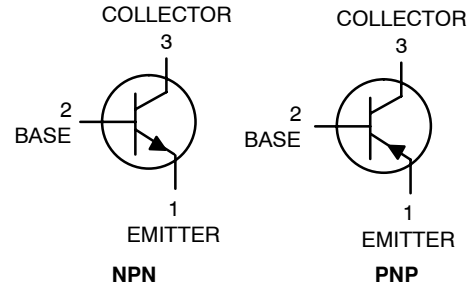

TO-92  
CASE 29-11

### MARKING DIAGRAM

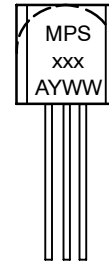

xxx = Specific Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

**Preferred** devices are recommended choices for future use and best overall value.


# MPS650, MPS651, NPN MPS750, MPS751, PNP

## ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)


Characteristic	Symbol	Min	Max	Unit
<b>OFF CHARACTERISTICS</b>				
Collector – Emitter Breakdown Voltage (Note 1) ( $I_C = 10 \text{ mA}$ , $I_B = 0$ )	$V_{(BR)CEO}$	40 60	– –	Vdc
MPS650, MPS750 MPS651, MPS751				
Collector – Base Breakdown Voltage ( $I_C = 100 \mu\text{A}$ , $I_E = 0$ )	$V_{(BR)CBO}$	60 80	– –	Vdc
MPS650, MPS750 MPS651, MPS751				
Emitter – Base Breakdown Voltage ( $I_C = 0$ , $I_E = 10 \mu\text{A}$ )	$V_{(BR)EBO}$	5.0	–	Vdc
Collector Cutoff Current ( $V_{CB} = 60 \text{ Vdc}$ , $I_E = 0$ ) ( $V_{CB} = 80 \text{ Vdc}$ , $I_E = 0$ )	$I_{CBO}$	– –	0.1 0.1	$\mu\text{A}$
MPS650, MPS750 MPS651, MPS751				
Emitter Cutoff Current ( $V_{EB} = 4.0 \text{ V}$ , $I_C = 0$ )	$I_{EBO}$	–	0.1	$\mu\text{A}$
<b>ON CHARACTERISTICS (Note 1)</b>				
DC Current Gain ( $I_C = 50 \text{ mA}$ , $V_{CE} = 2.0 \text{ V}$ ) ( $I_C = 500 \text{ mA}$ , $V_{CE} = 2.0 \text{ V}$ ) ( $I_C = 1.0 \text{ A}$ , $V_{CE} = 2.0 \text{ V}$ ) ( $I_C = 2.0 \text{ A}$ , $V_{CE} = 2.0 \text{ V}$ )	$h_{FE}$	75 75 75 40	– – – –	–
Collector – Emitter Saturation Voltage ( $I_C = 2.0 \text{ A}$ , $I_B = 200 \text{ mA}$ ) ( $I_C = 1.0 \text{ A}$ , $I_B = 100 \text{ mA}$ )	$V_{CE(sat)}$	– –	0.5 0.3	Vdc
Base – Emitter On Voltage ( $I_C = 1.0 \text{ A}$ , $V_{CE} = 2.0 \text{ V}$ )	$V_{BE(on)}$	–	1.0	Vdc
Base – Emitter Saturation Voltage ( $I_C = 1.0 \text{ A}$ , $I_B = 100 \text{ mA}$ )	$V_{BE(sat)}$	–	1.2	Vdc
<b>SMALL-SIGNAL CHARACTERISTICS</b>				
Current – Gain – Bandwidth Product (Note 2) ( $I_C = 50 \text{ mA}$ , $V_{CE} = 5.0 \text{ Vdc}$ , $f = 100 \text{ MHz}$ )	$f_T$	75	–	MHz

1. Pulse Test: Pulse Width  $\leq 300 \mu\text{s}$ , Duty Cycle = 2.0%.
2.  $f_T$  is defined as the frequency at which  $|h_{fe}|$  extrapolates to unity.


# MPS650, MPS651, NPN MPS750, MPS751, PNP

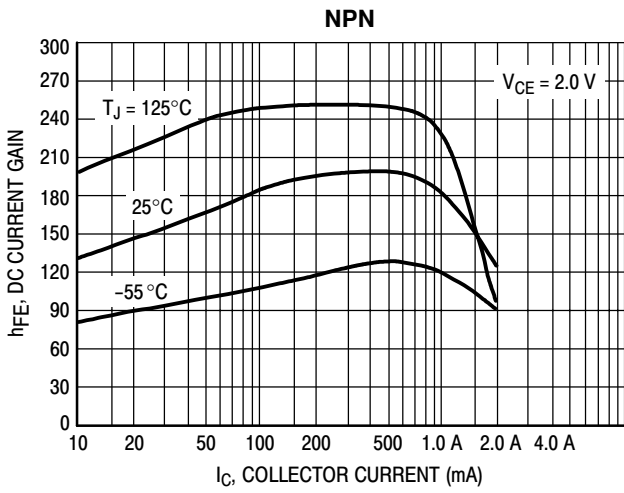


**Figure 1. MPS650, MPS651  
Typical DC Current Gain**

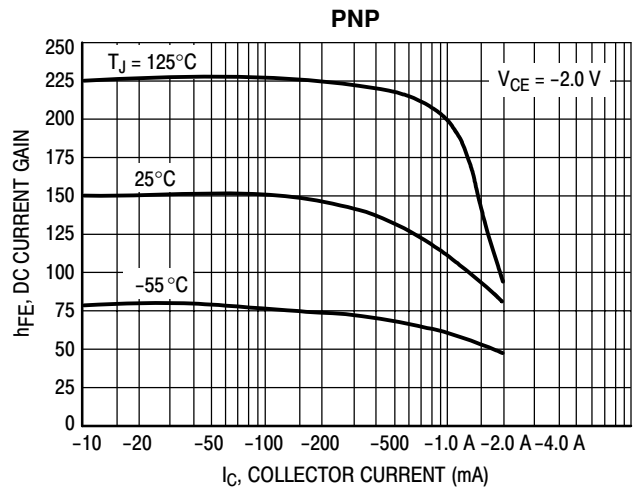

**Figure 2. MPS750, MPS751  
Typical DC Current Gain**

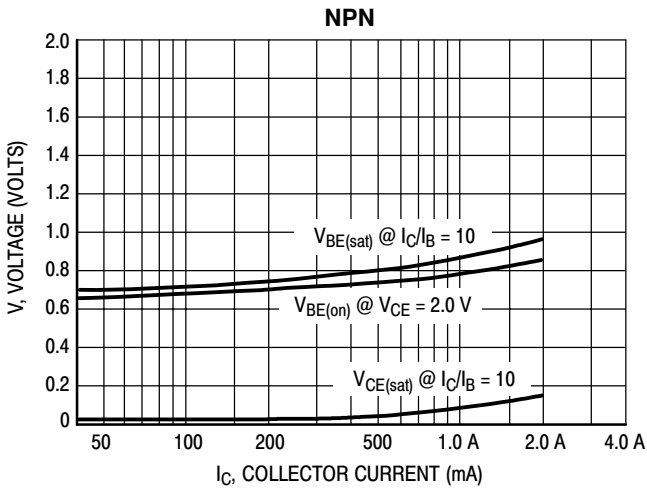

**Figure 3. MPS650, MPS651  
On Voltages**

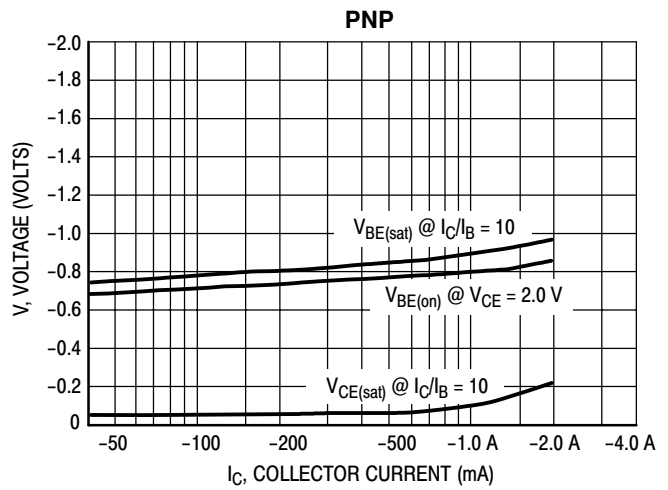

**Figure 4. MPS750, MPS751  
On Voltages**

MPS650, MPS651, NPN MPS750, MPS751, PNP

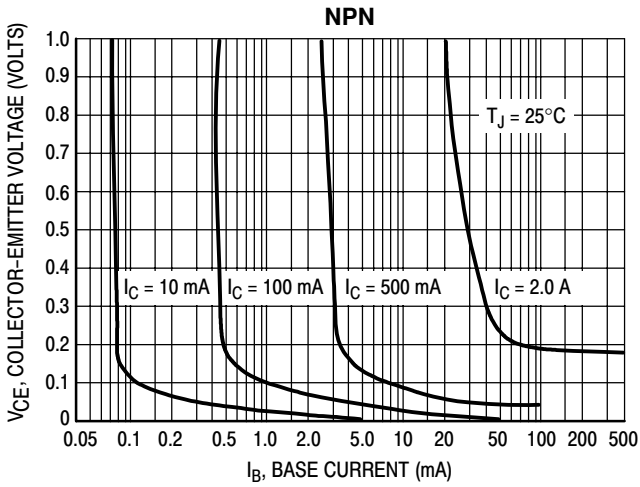


Figure 5. MPS650, MPS651  
Collector Saturation Region

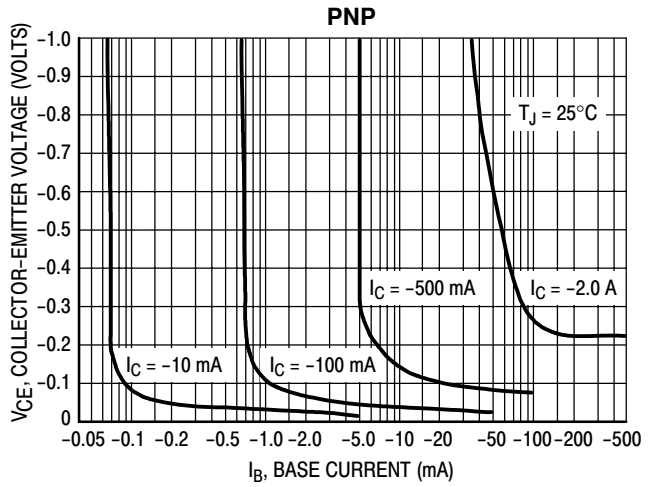


Figure 6. MPS750, MPS751  
Collector Saturation Region

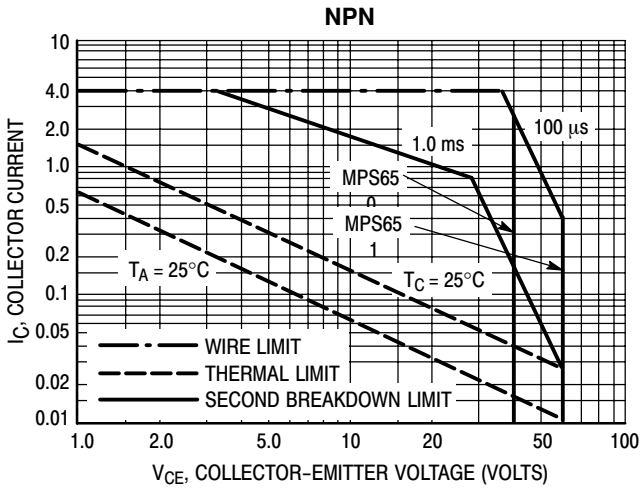


Figure 7. MPS650, MPS651 SOA,  
Safe Operating Area

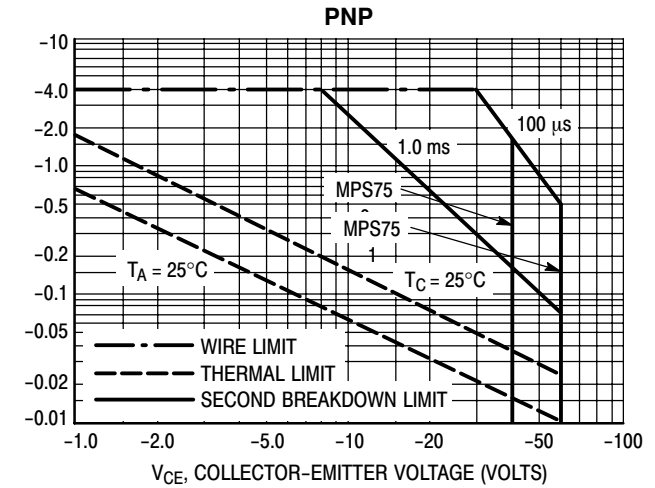


Figure 8. MPS750, MPS751 SOA,  
Safe Operating Area

# MPS650, MPS651, NPN MPS750, MPS751, PNP

## ORDERING INFORMATION



Device	Package	Shipping†
MPS650	TO-92	5000 Units / Bulk
MPS650G	TO-92 (Pb-Free)	5000 Units / Bulk
MPS650RLRA	TO-92	2000 / Tape & Reel
MPS650RLRAG	TO-92 (Pb-Free)	2000 / Tape & Reel
MPS650ZL1	TO-92	2000 / Tape & Ammunition
MPS650ZL1G	TO-92 (Pb-Free)	2000 / Tape & Ammunition
MPS651	TO-92	5000 Units / Bulk
MPS651G	TO-92 (Pb-Free)	5000 Units / Bulk
MPS651RLRA	TO-92	2000 / Tape & Reel
MPS651RLRAG	TO-92 (Pb-Free)	2000 / Tape & Reel
MPS651RLRBG	TO-92 (Pb-Free)	2000 / Tape & Reel
MPS651RLRM	TO-92	2000 / Tape & Ammunition
MPS651RLRMG	TO-92 (Pb-Free)	2000 / Tape & Ammunition
MPS750	TO-92	5000 Units / Bulk
MPS750G	TO-92 (Pb-Free)	5000 Units / Bulk
MPS750RLRA	TO-92	2000 / Tape & Reel
MPS750RLRAG	TO-92 (Pb-Free)	2000 / Tape & Reel
MPS750RLRP	TO-92	2000 / Tape & Ammunition
MPS750RLRPG	TO-92 (Pb-Free)	2000 / Tape & Ammunition
MPS751	TO-92	5000 Units / Bulk
MPS751G	TO-92 (Pb-Free)	5000 Units / Bulk
MPS751RLRA	TO-92	2000 / Tape & Reel
MPS751RLRAG	TO-92 (Pb-Free)	2000 / Tape & Reel
MPS751RLRP	TO-92	2000 / Tape & Ammunition
MPS751RLRPG	TO-92 (Pb-Free)	2000 / Tape & Ammunition
MPS751ZL1	TO-92	2000 / Tape & Ammunition
MPS751ZL1G	TO-92 (Pb-Free)	2000 / Tape & Ammunition

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MPS650, MPS651, NPN MPS750, MPS751, PNP

## PACKAGE DIMENSIONS

TO-92 (TO-226)  
CASE 29-11  
ISSUE AL

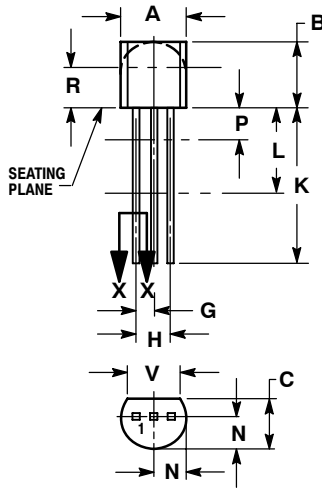

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	---	12.70	---
L	0.250	---	6.35	---
N	0.080	0.105	2.04	2.66
P	---	0.100	---	2.54
R	0.115	---	2.93	---
V	0.135	---	3.43	---

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA  
**Phone:** 480-829-7710 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 480-829-7709 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.

**MPS650/D**