

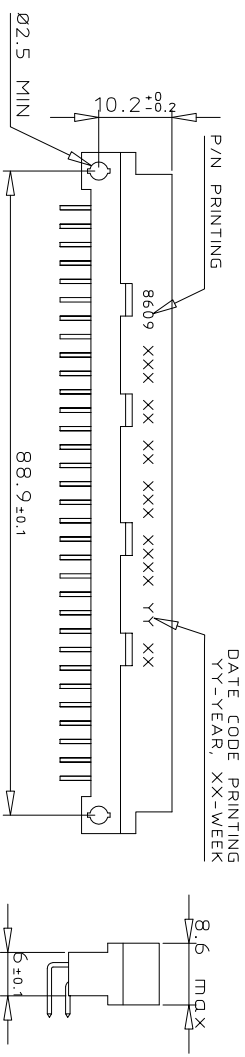


DIMENSIONS

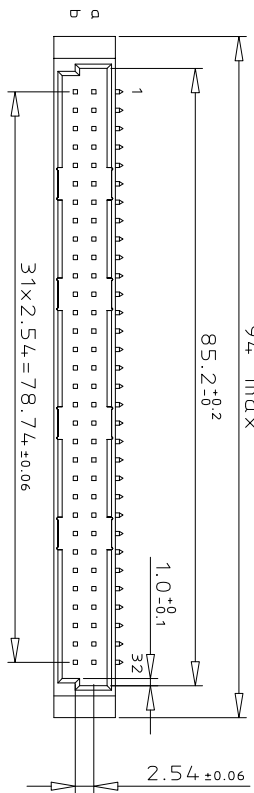


PCB LAYOUT

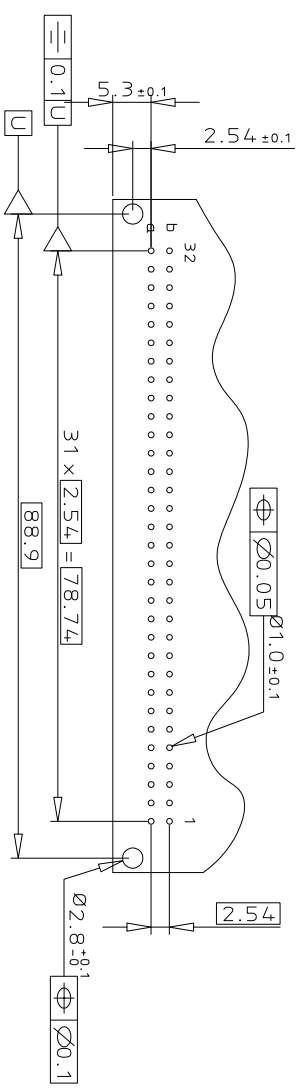

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

TERMINATION

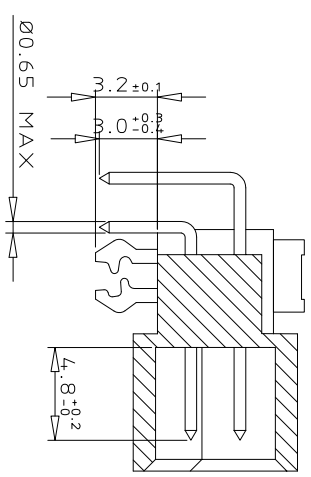

ORDERING INFORMATION

SERIES	8609	2	64	5	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS		1	32							
ROW a		1	32							
ROW b		2	64							
NO. OF CONTACTS										
TYPE OF INSULATOR										
2. ROW MALE INSULATOR										
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE B										
TERMINATION										
ANGLED SPILL										
OPTIONS										
NO. OPTION										
WITH HARPOONS										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
2.54 mm										
LEAD FREE VERSION										

mat'l. code	ISO 1302	surface	tolerance	projection	product family
see dwg C-8609-0000A	ISO 1302	ISO 406	ISO 1101	8609	
itr	ecn	nd	dr	date	tolerances unless otherwise specified
A	104-0063	MINI	2004-09-17	0angles	0.X
B	105-0089	MINI	2005-05-18	in60r	0.XX
C	106-0061	MINI	2006-05-31	0*2*	0.XXX
D	106-0164	MINI	2006-08-31	dr	0.1
E	108-0146	KR	2008-10-21	eng	Scale 3:2
sheet	revision	FCI			dwg no
index	sheet	KESAVAN R			C-8609-2008
		KESAVAN R			Sheet 1 of 1
		KESAVAN R			Size A3
		KESAVAN R			Product Customer Drawing