DIMENSIONS

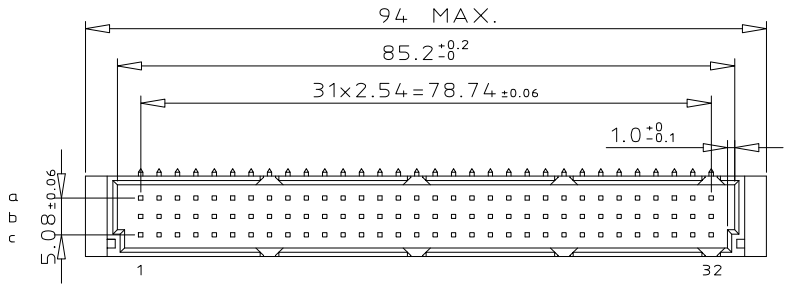

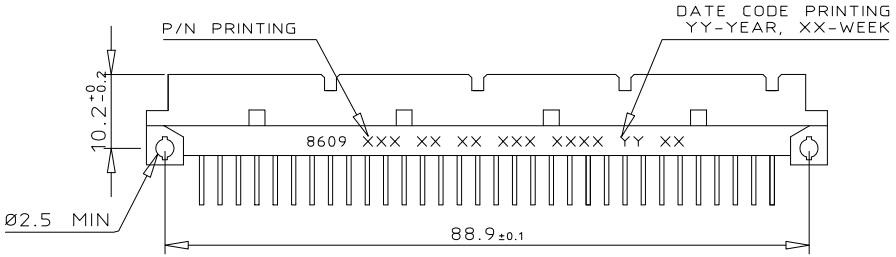



TERMINATION

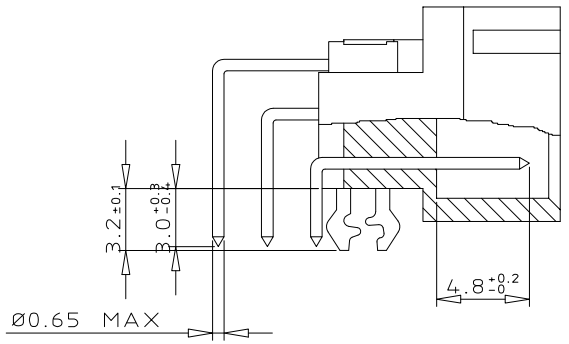

PCB LAYOUT

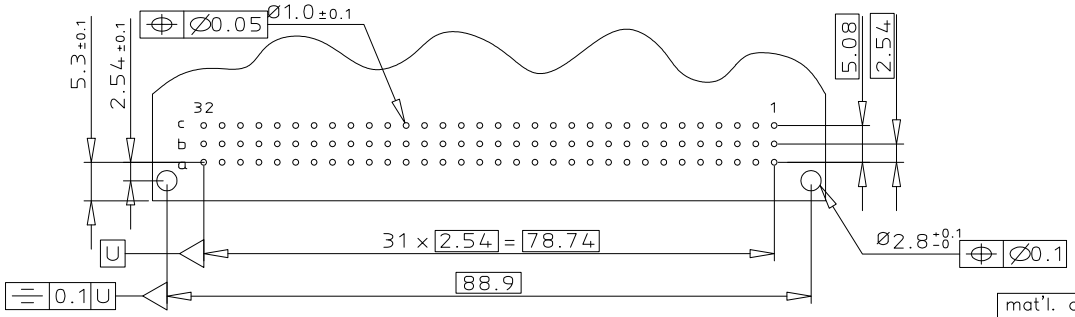

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a b c			3	96						
ROW a – c			4	64						
NO. OF CONTACTS				7						
TYPE OF INSULATOR										
3 ROW MALE INSULATOR				7						
METHOD OF MOUNTING										
STANDARD MOUNTING – STYLE C					1					
TERMINATION										
ANGLED SPILL						13				
OPTIONS										
NO OPTION							7			
WITH HARPOONS							H			
PERFORMANCE CLASS										
DIN 41612 CLASS 3								4		
DIN 41612 CLASS 2								5		
DIN 41612 CLASS 1								6		
AS PER MIL C 55302 / JSS 50808								8		
PITCH PER ROW										
2.54 mm									5	
LEAD FREE VERSION										ELF

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

ltr	ecn no	dr	date
A	104-0063	MINI	2004-09-16
B	105-0042	MINI	2005-05-19
C	106-0061	MINI	2006-05-31
D	107-0100	KR	2007-08-20
E	108-0146	KR	2008-10-21

sheet index	revision sheet	E 1

mat'l. code: SEE DRAWING C-8609-0000A

surface: ISO 1302

tolerance: ISO 406 ISO 1101

tolerances unless otherwise specified: angles 0°±2°; linear 0.X ±0.1, 0.XX ±0.1, 0.XXX ±0.1

dr	MINI K V	2004-09-16
engr	RAKHEE G	2004-09-16
chr	KESAVAN R	2008-10-21
appd	KESAVAN R	2008-10-21

projection

mm

scale 3:2

product family: 8609

title: DIN STANDARD HEADER DIN 41612 STYLE C

dwg no: C-8609-2001

sheet 1 of 1

size: A3

type: Product Customer Drawing

form: A3

Copyright FCI
FCIconnect.com
PDM: Rev:E STATUS:Released Printed: May 14, 2011
Downloaded from Elcodis.com electronic components distributor