




THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
A1		REVISED PER ECO-11-005033			

**CONNECTOR ASSEMBLY
 EXAMPLARY LOADED**

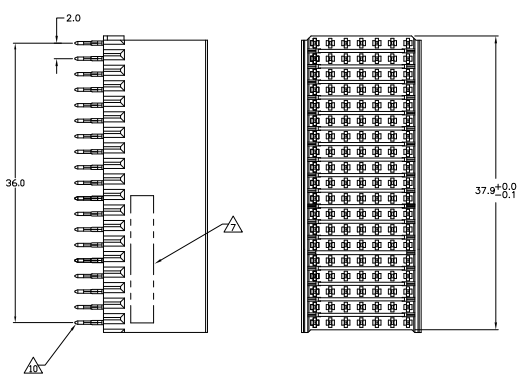

CONTACT DIMENSIONS
 SCALE 5:1




CONTACT LAYOUT

	z	a	b	c	d	e	f
1	C	B	B	B	B	B	C
2	C	B	B	B	B	B	C
3	C	B	B	B	B	B	C
4	C	B	B	B	B	B	C
5	C	B	B	B	B	B	C
6	C	B	B	B	B	B	C
7	C	B	B	B	B	B	C
8	C	B	B	B	B	B	C
9	C	B	B	B	B	B	C
10	C	B	B	B	B	B	C
11	C	B	B	B	B	B	C
12	C	B	B	B	B	B	C
13	C	B	B	B	B	B	C
14	C	B	B	B	B	B	C
15	C	B	B	B	B	B	C
16	C	B	B	B	B	B	C
17	C	B	B	B	B	B	C
18	C	B	B	B	B	B	C
19	C	B	B	B	B	B	C

**RECOMMENDED PCB-HOLE LAYOUT
 COMPONENT SIDE SHOWN**

PLATED THRU HOLES PARAMETERS
 REFERENCE APPLICATION SPECIFICATION

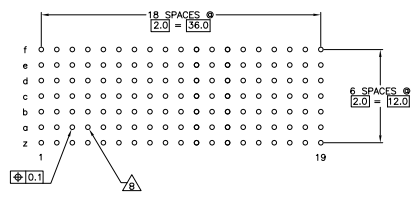

△	△	△	△	△	△	△	△	△	△	1-5352033-0
△	△	△	△	△	△	△	△	△	△	5352033-9
△	△	△	△	△	△	△	△	△	△	5352033-4
△	△	△	△	△	△	△	△	△	△	5352033-1
FINISH										PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REVISED PER ECO-11-005033	DATE	11-08-2011	BY	31MMR11	CHK	RK	APP	HMR
DESIGNER	108-19082	DATE	11-08-2011	BY	108-19082	CHK		APP		
DATE	11-08-2011	BY	108-19082	CHK		APP				
REVISED PER ECO-11-005033	DATE	11-08-2011	BY	108-19082	CHK		APP			
CUSTOMER DRAWING	DATE	11-08-2011	BY	108-19082	CHK		APP			

THIS DRAWING IS UNPUBLISHED
© 2008 TE Connectivity

REV	REVISED BY	DESCRIPTION	DATE	APP'D
00	AD	SEE SHEET 1	-	-

- ▲ MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- ▲ GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- ▲ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- ▲ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- ▲ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- ▲ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIRONMENT APPLICATIONS.
- ▲ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- ▲ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
- ▲ FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- ▲ FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- ▲ TO BE MEASURED AT BOTTOM OF SHROUD.
- ▲ CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.
- ▲ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		TE CONNECTIVITY TE Connectivity
DESIGNER mm	ENGINEER/LEVEL mm	DATE 114-19029
	108-19082	MALE ASSEMBLY, 2-PACK 2mm HM, TYPE B
DATE 114-19029	REVISED BY mm	ISSUE DATE 00779
SEE SHEET 1	SEE SHEET 1	CUSTOMER DRAWING
		DATE 4-1
		SHEET 2
		OF 2