

PERFORMANCE CHARACTERISTICS


CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CDNT / CDNT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE 0.75 N MAX /CDNT
EXTRACTION FORCE 0.15 N MIN /CDNT
INSULATION RESISTANCE 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS.C.201444.003)
- THIS PRODUCT IS CSA APPROVED
- THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA.201.572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT
P.C.B.-HOLE

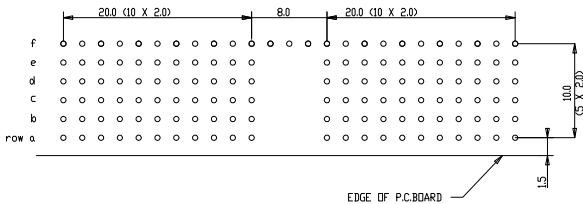

Material		Spec ref		tolerance	projection	MM
Mtl code		✓		ASME	ISO	MM
Heat treat						
rev	date	date	date	date	date	date
A	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09
B	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09
C	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09
D	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09
E	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09
F	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09
G	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09
H	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09	10/08/09
Product Family		MILLIPACS		Rev		Scale
Model Name		HMERIPAS08		A1		5,000
Model Revision		1		ECN		
Part		MPACS 5+2R RA RCP		Rev		Scale
Part		CONN TYPE A		A1		5,000
Part		HMERIPAS08		Rev		Scale
Part		CUSTOMER DRAWING		A1		5,000