DIMENSIONS

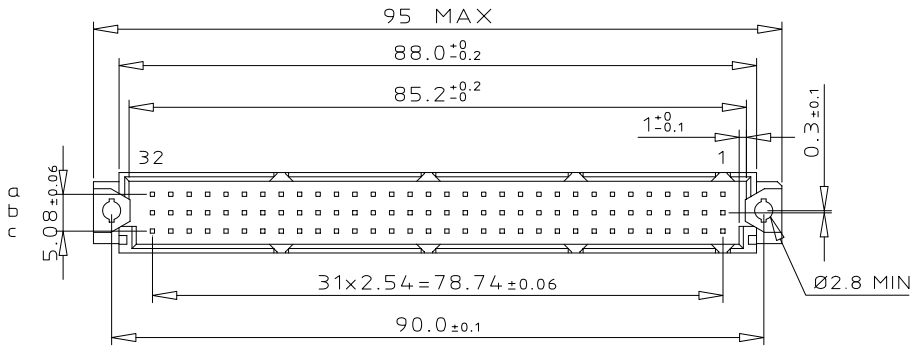

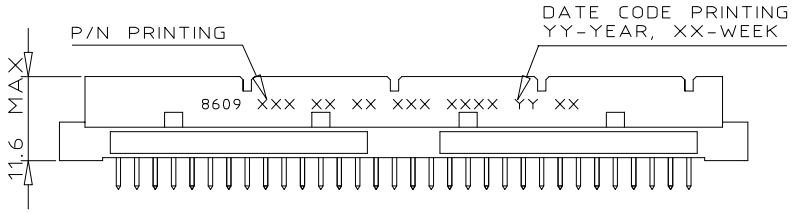

TERMINATION

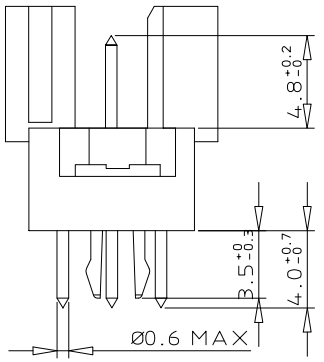

ORDERING INFORMATION

SERIES	8609	3	96	7	8	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a b c		3	96							
ROW a - c		4	64							
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR				7						
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R					8					
TERMINATION										
STRAIGHT SPILL						14				
OPTIONS										
NO OPTION							7			
WITH HARPOONS							H			
PERFORMANCE CLASS										
DIN 41612 CLASS 3								4		
DIN 41612 CLASS 2								5		
DIN 41612 CLASS 1								6		
AS PER MIL C 55302 / JSS 50808								8		
PITCH PER ROW										
2.54 mm									5	
LEAD FREE VERSION										ELF

PCB LAYOUT

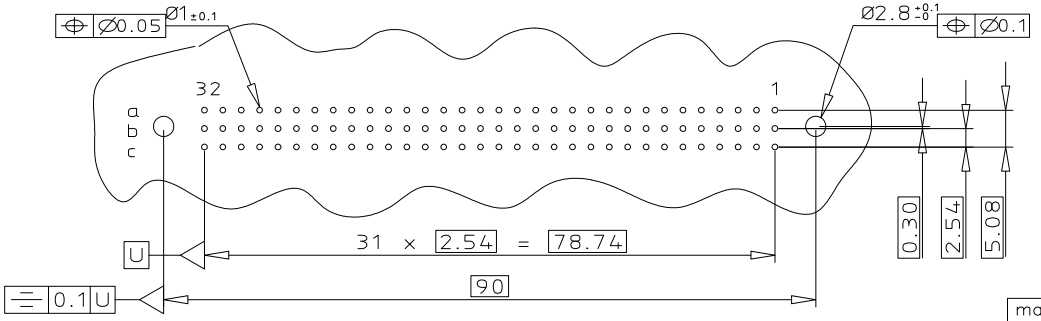

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	surface	tolerance	projection	product family
SEE DWG C-8609-0000A	ISO 1302	ISO 406 ISO 1101		8609

ltr	ecn no	dr	date
A	104-0063	MINI	2004-09-17
B	105-0089	MINI	2005-05-19
C	105-0174	MINI	2005-09-27
D	106-0061	MINI	2006-05-31
E	108-0142	KR	2008-10-17
F	108-0146	KR	2008-10-21

tolerances unless otherwise specified

angles	linear	0.X ±0.1
0°±2°		0.XX ±0.1
		0.XXX ±0.1

dr	MINI K V	2004-09-17
engr	RAKHEE G	2004-09-17
chr	KESAVAN R	2008-10-21
appd	KESAVAN R	2008-10-21

mm

scale 3:2

title: DIN REVERSE HEADER DIN 41612 STYLE R

dwg no C-8609-2004 | sheet 1 of 1 | size A3

type Product Customer Drawing

sheet index	revision	F
	sheet	1

form: A3

Copyright FCI
FCIconnect.com
PDM: Rev:F STATUS: Released Printed: May 14, 2011
Downloaded from Elcodis.com electronic components distributor