

PERFORMANCE CHARACTERISTICS


CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CDNT / CDNT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE 0.75 N MAX /CDNT
EXTRACTION FORCE 0.15 N MIN /CDNT
INSULATION RESISTANCE 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS.C.201444.003)
- THIS PRODUCT IS CSA APPROVED
- THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA.201.572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT
P.C.B.-HOLE

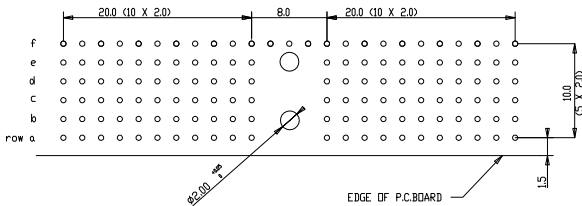

Material		Spec ref		tolerance	projection	MM
Mst code				√	⊕	MM
Heatstress						
rev	date	by	date	Parting/Inch	V.Parts	Product Family
A	14-09-08	HN	14-09-08	Dr	30 03 99	MLL/PAES
B	05-09-07	HN	05-09-07	Dr		Model Name
C	05-09-07	HN	05-09-07	Appr		Model Revision
D	11-23-09	HN	11-23-09			ML Level
E						
F						
G						
H						
FC				MPACS 5+2R RA RCP		2
FC				CONN TYPE A		BS.C.201444.035
FC				HNEROPAS08----		CUSTOMER DRAWING