


Tous droits strictement réservés. Reproduction ou communication à des tiers lit sans autorisation écrite du propriétaire.

All rights strictly reserved. Reproduction or communication to any third party without written authority from the proprietor.

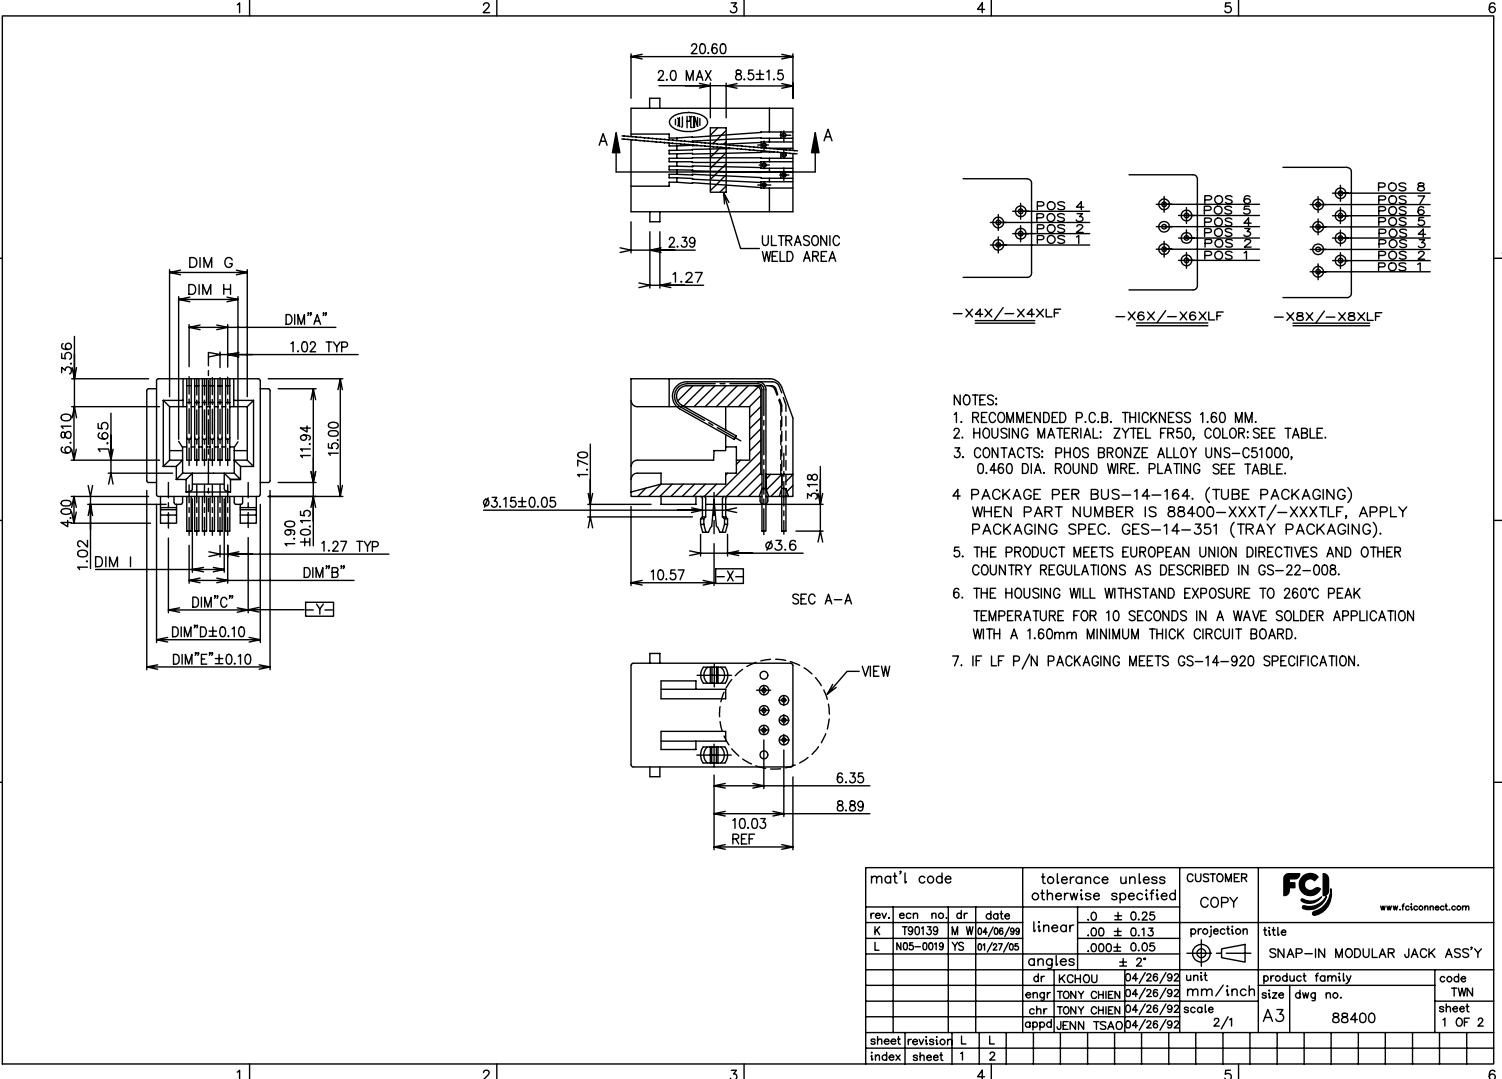

- NOTES:
1. RECOMMENDED P.C.B. THICKNESS 1.60 MM.
 2. HOUSING MATERIAL: ZYTEL FR50, COLOR: SEE TABLE.
 3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, 0.460 DIA. ROUND WIRE. PLATING SEE TABLE.
 4. PACKAGE PER BUS-14-164. (TUBE PACKAGING) WHEN PART NUMBER IS 88400-XXXT/-XXXTLF, APPLY PACKAGING SPEC. GES-14-351 (TRAY PACKAGING).
 5. THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 6. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
 7. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

mat'l code		tolerance unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com	
rev.	ecn no.	dr	date	linear	projection	title
K	T90139	M W	04/06/99	.0 ± 0.25		SNAP-IN MODULAR JACK ASS'Y
L	N05-0019	YS	01/27/05	.00 ± 0.13		
				.000 ± 0.05		
				angles	± 2°	
		dr	KCHOU	04/26/92	unit	product family
		enr	TONY CHIEN	04/26/92	mm/inch	code
		chr	TONY CHIEN	04/26/92	scale	size
		appd	JENN TSAO	04/26/92	2/1	dwg no.
sheet	revision	L	L			88400
index	sheet	1	2			1 of 2

PDM: Rev:L STATUS:Released Printed: Dec 04, 2009


Tous droits strictement réservés. Reproduction ou communication à des tiers sans
 autorisation écrite de BERNE ELECTRONICS.

All rights strictly reserved. Reproduction or communication to others without
 written permission of BERNE ELECTRONICS.

Copyright BERNE ELECTRONICS by

DIM.	NO OF POS	DIM A	DIM B	DIM C	DIM D	DIM E	DIM G	DIM H	DIM I	LOADED POS	REMARK
88400-X44/-X44LF	4	3.05	3.81	7.62	11.20	13.72	7.87	5.50	3.05	ALL POS	
88400-X42/-X42LF										2,3	
88400-X66/-X66LF	6	5.08	6.35	10.16	13.20	15.72	9.906	6.60	4.06	ALL POS	
88400-X64/-X64LF										2,3,4,5	
88400-X62/-X62LF										3,4	
88400-X88/-X88LF	8	7.11	8.89	11.43	15.24	17.76				ALL POS	NOT AVAILABLE
88400-X86/-X86LF										2,3,4,5,6,7	
88400-X84/-X84LF										3,4,5,6	

PLATING & HSG COLOR CODE	PLATING	HSG COLOR
0	30 v " G.X.T.	BLACK
1	15 v " GOLD.	
2	20 v " GFPD.	
3	30 v " GOLD.	
4	15 v " G.X.T.	
5	50 v " GOLD.	
6	6 v " GOLD.	
7	2 v " GOLD.	

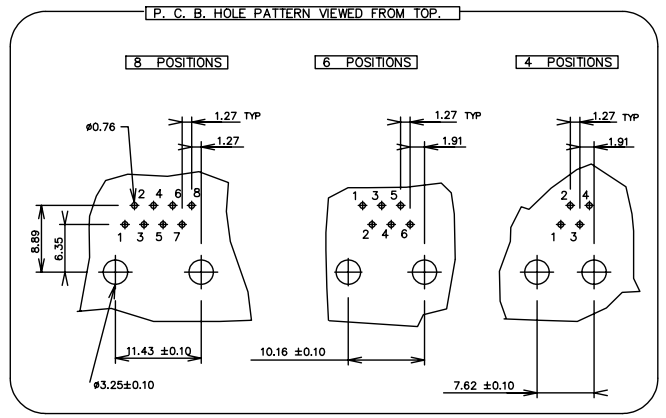

mat'l code		tolerance unless otherwise specified		CUSTOMER		www.fcjconnect.com		
rev.	ecn no. dr date	linear	.0 \pm 0.25	projection	COPY			
L			.00 \pm 0.13		title			
		angles	.000 \pm 0.05		SNAP-IN MODULAR JACK ASS'Y			
		dr	KCHOU D4/26/92	unit	product family		code	
		enr	TONY CHIEN D4/26/92	mm/inch	size		TWN	
		chr	TONY CHIEN D4/26/92	scale	88400		sheet	
		appd	JENN TSAO D4/26/92	2/1			2 Of 2	
sheet	revision							
index	sheet							

PDM: Rev:L STATUS:Released Printed: Dec 04, 2009