

## VS-08-BU-RJ45/LP-2


Order No.: 1688599



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688599>


RJ45 socket insert, 2x, for PCB assembly, CAT5e, 8-pos., shielded, with angled solder pins

Ethernet 

Commercial data	
GTIN (EAN)	 4 017918 622367
sales group	D511
Pack	5 pcs.
Customs tariff	85366990
Catalog page information	Page 227 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
10/26/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Mechanical characteristics	
Number of positions	8
Number of slots	2
Insertion/withdrawal cycles	≥ 750
Connection method	Solder connection
Ambient temperature (operation)	-40 °C ... 85 °C

**Material data**

Inflammability class acc. to UL 94	V0
Contact carrier material	Thermoplastic
Contact material	Copper alloy
Contact surface material	Gold over nickel
Degree of protection	IP20

**Electrical characteristics**

Number of positions	8
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)
Rated current	1.5 A
Surge voltage category	II
Pollution degree	2

**Accessories**


Item	Designation	Description
1688654	VS-08-A-RJ45/LP-2-IP 20	RJ45 panel mounting frame, 2x, IP20, for socket inserts for PCB connection, without mounting screws

**General**


**Diagrams/Drawings**

Drilling plan/solder pad geometry

Drilling diagram

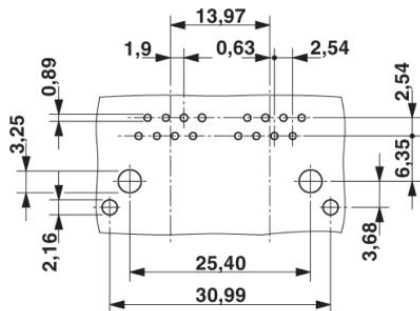


Dimensioned drawing

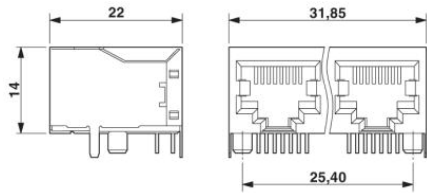

RJ45 female insert

Schematic diagram

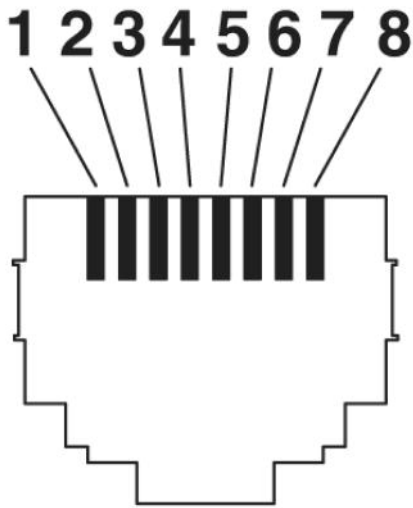

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;