

VS-08-BU-RJ45/LP-6

Order No.: 1688612




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688612>

RJ45 socket insert, 6x, for PCB assembly, CAT5e, 8-pos., shielded, with angled solder pins


Ethernet



Commercial data	
GTIN (EAN)	 4 017918 622381
Note	Made-to-order
sales group	D511
Pack	5 pcs.
Customs tariff	85366990
Catalog page information	Page 227 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
10/26/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics	
Number of positions	8
Number of slots	6
Insertion/withdrawal cycles	≥ 750
Connection method	Solder connection
Ambient temperature (operation)	-40 °C ... 85 °C

Material data	
Inflammability class acc. to UL 94	V0

Contact carrier material	Thermoplastic
Contact material	Copper alloy
Contact surface material	Gold over nickel
Degree of protection	IP20

Electrical characteristics


Number of positions	8
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)
Rated current	1.5 A
Surge voltage category	II
Pollution degree	2

Accessories

Item	Designation	Description
General		
1688670	VS-08-A-RJ45/LP-6-IP 20	RJ45 panel mounting frame, 6x, IP20, for socket inserts for PCB connection, without mounting screws


Diagrams/Drawings

Drilling plan/solder pad geometry

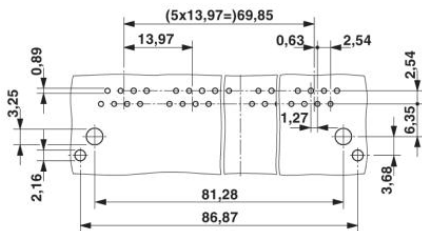


Drilling diagram

Dimensioned drawing

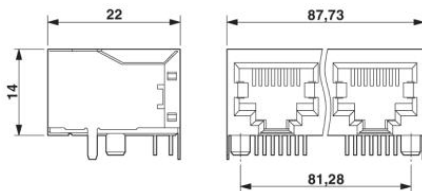

RJ45 female insert

Schematic diagram

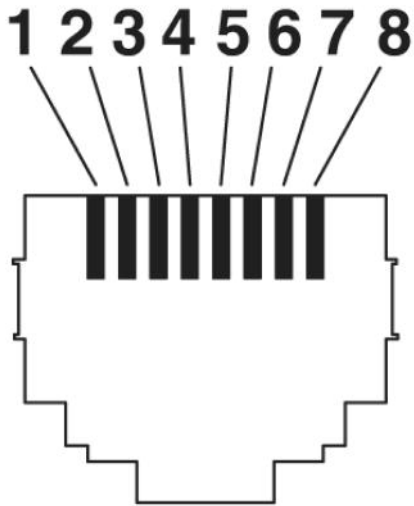

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;