

VS-08-T-RJ45/IP67


Order No.: 1688696



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688696>


RJ45 sleeve housing, IP67, for pin insert VS-08-ST-RJ45, with push-pull interlocking for panel mounting frames, for cable cross section 5.0 mm ... 6.5 mm

Ethernet

Commercial data	
GTIN (EAN)	
sales group	D510
Pack	5 pcs.
Customs tariff	85472000
Catalog page information	Page 170 (PC-2007)

Product notes

WEEE/RoHS-compliant since:
03/14/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics	
Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 6.5 mm
Cable exit	Straight
Color	gray
Tightening torque max.	2.5 Nm

Ambient temperature (operation)	-40 °C ... 80 °C
---------------------------------	------------------

Material data

Inflammability class acc. to UL 94	V0
Housing material	PA
Material, O-ring	FPM
Cable seal material	NBR
Degree of protection	IP67

Accessories


Item	Designation	Description
General		
1688573	VS-08-ST-RJ45	RJ45 pin insert, CAT5e, 8-pos., shielded, IDC connection method, for litz wires AWG 26 and solid wires AWG 26 ... 24

Protective covers

1653757	VS-SCRJ-PC	IP67 protective cover, for covering the male inserts in the sleeve housings IP67, VS-SCRJ-..., VS-04-..., VS-06-... and VS-08-...
---------	------------	---

Diagrams/Drawings

Dimensioned drawing

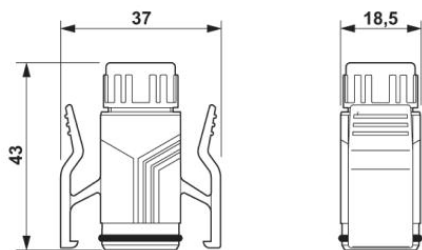

RJ45 sleeve housing IP67

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;